

UNIVERSITY OF MISKOLC
FACULTY OF MECHANICAL ENGINEERING AND INFORMATICS



**ELABORATING AND OPTIMIZING METHODS TO INVESTIGATE
HEAT TRANSFER PROBLEMS IN BUILDING COMPONENTS**

PHD THESES

Prepared by

Humam Kareem Jalghaf Al-Janabi

Mechanical Engineering (BSc),
Mechanical Engineering (MSc)

ISTVÁN SÁLYI DOCTORAL SCHOOL OF MECHANICAL ENGINEERING SCIENCES

TOPIC FIELD OF BASIC ENGINEERING SCIENCES

TOPIC GROUP OF TRANSPORT PROCESSES AND MACHINES

Head of Doctoral School

Dr. Gabriella Bognár

DSc, Full Professor

Head of Topic Group

Dr. László Baranyi

Full Professor

Scientific Supervisors

Dr. Endre Kovács

Dr. Betti Bolló

Miskolc

2024

CONTENTS

CONTENTS.....	I
SUPERVISOR’S RECOMMENDATIONS	III
LIST OF SYMBOLS AND ABBREVIATIONS.....	IV
1. INTRODUCTION	5
1.1. <i>General.....</i>	5
1.2. <i>Literature Review</i>	5
1.3. <i>The Aim of Dissertation</i>	9
2. THE GENERAL HEAT EQUATION.....	10
2.1. <i>The General Heat Equation in Cartesian Coordinates</i>	10
2.2. <i>The Spatial Discretization in Cartesian Coordinates</i>	12
2.3. <i>The General Heat Equation in Cylindrical and Spherical Coordinates</i>	14
2.4. <i>The Spatial Discretization in Cylindrical and Spherical Coordinates</i>	15
3. NUMERICAL METHODS TO SOLVE THE HEAT EQUATION	17
3.1. <i>The Developed Numerical Methods</i>	17
3.1.1. <i>The Explicit-Euler Method</i>	17
3.1.2. <i>The Crank-Nicklinson Method</i>	17
3.1.3. <i>The UPFD Method</i>	18
3.1.4. <i>The Dufort–Frankel Method</i>	18
3.1.5. <i>The Rational Runge–Kutta Methods</i>	18
3.1.6. <i>The Heun’s Method</i>	19
3.1.7. <i>The Original Odd-Even Hopscotch Method</i>	19
3.2. <i>The Invented Numerical Methods</i>	20
3.2.1. <i>The Constant Neighbor Method</i>	20
3.2.2. <i>The Two-Stage and Three-Stage Linear-Neighbor Method</i>	21
3.2.3. <i>The CpC Algorithm</i>	21
3.2.4. <i>The Reversed Odd-Even Hopscotch Method.....</i>	21
3.2.5. <i>The Shifted-Hopscotch Method</i>	22
3.2.6. <i>The Leapfrog-Hopscotch Method</i>	22
3.2.7. <i>The Asymmetric Hopscotch Method</i>	22
3.2.8. <i>The Pseudo-Implicit Method</i>	23
3.3. <i>The Optimization of Shifted-Hopscotch Method Combinations.....</i>	23
3.4. <i>The Optimization of Leapfrog -Hopscotch Method Combinations.....</i>	34
3.5. <i>The Optimization of Pseudo-Implicit Method Combinations.....</i>	36
4. USE THE EFFICIENT METHODS TO SOLVE THE REAL LIFE HEAT TRANSFER PROBLEMS	39
4.1. <i>Calculate The Heat Conduction in an Insulated Wall</i>	39
4.2. <i>Calculate The Heat Conduction, Convection, and Radiation in an Insulated Wall with Thermal Bridging</i>	48
4.3. <i>Calculate The Heat Transfer in Cylindrical and Spherical Shaped Bodies</i>	56
4.4. <i>Calculate The Heat Transfer in Multilayer Walls with Photovoltaic Cell and Air.....</i>	66
4.5. <i>Calculate The Heat Transfer in Building Walls with Phase Change Materials Using Effective Heat Capacity Model</i>	73
5. THESES – NEW SCIENTIFIC RESULTS.....	92

ACKNOWLEDGEMENTS 94
REFERENCES 95
LIST OF PUBLICATIONS RELATED TO THE TOPIC OF THE RESEARCH FIELD 100

SUPERVISOR'S RECOMMENDATIONS

Date

Supervisor

LIST OF SYMBOLS AND ABBREVIATIONS

Quantity	Meaning	Unit	Quantity	Meaning
u	Temperature	Kelvin (K)	$anal$	Analytical
u_{cr}	Melting Temperature	K	Num	Numerical
Q_{gen}	Heat Generation	Watt (W)	Max	Maximum
$Q_{convection}$	Heat Convection	Watt (W)	abs	Absolute
$Q_{radiation}$	Heat radiation	Watt (W)	f	Shape function
ΔE	Change in Energy of an Element	Joule (J)	η	Reduced variable
k	Thermal Conductivity	W/(m·K)	S, L	Solid, Liquid state
h	Convection Coefficient	W/(m ² ·K)	Li	Liquid Phase
σ^*	Radiation Constant	W/(m ² ·K ⁴)	So	Solid Phase
SB	Stefan–Boltzmann Constant	W/m ² ·K ⁴	La	Latent
α	Thermal Diffusivity	m ² /s	Se	Sensible
ρ	Density	kg/m ³	g	Gaussian Function
c	Specific Heat	J/kg·K	λ	The root of transcendental equation
C	Heat Capacity	J/K	erf	Error Function
R	Thermal Resistance	K/W	FEM	Finite element method
t	Time	s	CR	Convection, radiation
S	Surface Area	m ²	SH	Shifted-Hopscotch method
V	Volume	m ³	ASH	Asymmetric Hopscotch Method
ϕ	Azimuthal angle	Rad, deg	LH	Leapfrog-Hopscotch method
θ	Polar angle	Rad, deg	BC	boundary condition
u_{face}	Boundary Temperature	K	M	The system matrix
$L_{x,z}$	Length	m	ε	emissivity
r	Radius	m		
z	Height	m		
σ	Standard Deviation Temperature	K		
EHC	Effective Heat Capacity	J/K		
SHC	Sensible Heat Capacity	J/K		
LHC	Latent Heat Capacity	J/K		
H	Latent Heat	J/Kg		
Q	Heat Energy	kJ/ m ²		

1. INTRODUCTION

1.1. *General*

Energy efficiency in the building sector is crucial for addressing the challenges of climate change and fostering a sustainable economy. Buildings are significant energy consumers and have the potential to make substantial contributions to reducing energy consumption and greenhouse gas emissions. Enhancing the energy efficiency of buildings requires a multifaceted approach, with a particular emphasis on optimizing the thermal behavior of building components. The efficient management of heat transfer within buildings is fundamental to achieving energy sustainability and cost-effectiveness. Building envelopes, including walls, roofs, and floors, exhibit different thermal performances depending on their position within the building. To optimize energy efficiency, it is essential to accurately calculate heat transfer within these building components.

The heat transfer in building components can be calculated by using the general heat transfer equation, which depends on various parameters, most importantly material properties and boundary conditions. Utilizing materials with excellent thermal properties such as thermal conductivity, density, and specific heat capacity determines how effectively heat is transferred through a material can significantly enhance heat transfer performance, thereby improving the overall energy efficiency. Boundary conditions, determined by the internal and external environments of the building, play a crucial role in heat transfer calculations. These conditions, including temperature, humidity and airflow, serve as input parameters for accurately modeling the thermal behavior of building components.

To conduct a precise thermal analysis of building walls, accurate numerical methods are essential. Several studies in the literature have focused on heat transfer through walls to analyze the thermal behavior of a multilayer medium in a transient regime. These studies have developed mathematical models that calculate temperature and thermal contact resistance distributions. Some research proposes MATLAB-based numerical solution models for simulations, while others utilize computational fluid dynamics (CFD) methods.

1.2. *Literature Review*

1.2.1. *Literature Review of Numerical Methods*

The diffusion equation, incorporating a diffusion term, has been extensively studied, resulting in numerous analytical solutions [1-6]. However, these solutions generally assume constant parameters such as the diffusion coefficient or heat conductivity, which do not vary with space, time, or the dependent variable u . A notable exception is the work of Zoppou and Knight, who derived analytical solutions for the two- and three-dimensional advection-diffusion equation with specific forms of spatially variable coefficients [7]. Nevertheless, for general cases

with space-dependent coefficients, numerical methods are essential. This is particularly true for systems where physical properties vary significantly even within close proximity [8]. Such variations often result in eigenvalues spanning several orders of magnitude, leading to severely stiff problems.

When partial differential equations (PDEs) are spatially discretized, they form systems of ordinary differential equations (ODEs). Solving these systems numerically becomes challenging when dealing with a large number of variables, especially in three-dimensional spaces. Traditional explicit methods, such as Runge-Kutta, are conditionally stable and often require impractically small time steps. Implicit methods, while typically unconditionally stable, necessitate solving algebraic equations at each time step. These computations can be time-consuming and complex due to non-tridiagonal matrices. Consequently, significant efforts have been directed towards developing sophisticated modifications to enhance the efficiency of implicit methods [9]. Currently, the implicit methods with these extensions are usually used to solve these kinds of problems [10-12]. Despite these advancements, parallelizing implicit methods remains challenging, though some progress has been made [13,14]. The shift towards increased parallelism in high-performance computing [15,16], driven by the stagnation in CPU clock frequency improvements, further emphasizes this issue.

Given these challenges, a part of my work focuses on developing novel, easily parallelizable, explicit, and unconditionally stable methods. A key example is the two-stage odd-even hopscotch (OEH) algorithm, introduced by Gordon [17] and later reformulated and analyzed by Gourlay [18-20] (see also [21]). This method has been modified to enhance its reliability and accuracy, typically by increasing its implicitness. This has led to a hierarchy of algorithms, from the fully explicit OEH to the alternating direction implicit (ADI) hopscotch, each offering greater accuracy at the cost of increased programming complexity and runtime [19]. Morris and Nicoll applied these methods to thermal print head calculations and found that, while the OEH method was faster than its more implicit versions for isotropic media, it produced inaccurate results for anisotropic cases, necessitating the use of the ADI hopscotch for meaningful solutions [22].

The OEH method has since been applied to various problems, including the incompressible Navier-Stokes equations [23], the Frank-Kamenetskii [24] and Gray-Scott reaction-diffusion equations [25], and even the nonlinear Dirac equation [26]. Goede and Boonkamp implemented a vectorized OEH scheme for the two-dimensional Burgers' equations, significantly increasing speed and solver performance [27]. Recently, Maritim et al. developed hybrid algorithms incorporating the hopscotch, Crank-Nicolson, Du Fort-Frankel, and other schemes for the two-dimensional Burgers' equations, finding their implicit algorithms stable and accurate [28,29].

In a series of papers [30-32], new hopscotch combinations were developed using alternative formulas to the original explicit and implicit Euler schemes. Tests showed [30] that for stiff systems, the original OEH method could produce significant inaccuracies for large time steps, with relative errors reaching up to 10^4 , which could be more problematic than instability if unnoticed by inexperienced users. Two of the three new combinations, however, demonstrated much better performance.

1.2.2. Literature review of energy efficiency in building

The efficient management of heat transfer in buildings is paramount for achieving energy sustainability and cost-effectiveness in the built environment. The comfortable interior environment of the building is a crucial issue for most people living or working inside, and it largely depends on the wall structure. So to understand how the wall structure is affected in the interior zone I will focus on the thermal analysis of the wall structure by using very efficient algorithms. The integration of advanced materials and technologies into building envelopes has gotten significant attention from researchers and practitioners alike. Among these innovations, the combination of phase change materials (PCMs) and thermal insulation holds great promise for enhancing energy efficiency and occupant comfort. PCMs are known for their high heat capacity and outstanding energy storage potential, as well as low heat transfer coefficient. The integration of PCM within building envelopes offers the ability to store and release latent heat during phase transitions, thereby mitigating temperature fluctuations and reducing the reliance on mechanical heating and cooling systems. Concurrently, thermal insulation serves to minimize heat transfer, further enhancing the overall energy performance of the building. Historically, numerical simulations have played an important role in understanding the nature of heat transfer within building structures.

X. Geng et al. [33] explored the optimization of the location combination for thermal insulation material (TIM) and phase-change material (PCM) in multi-layer walls during both continuous and intermittent air-conditioning operations. These walls typically incorporate TIM or PCM layers to enhance thermal performance. Four wall models were constructed for evaluation, considering temperature and heat flow on inner surfaces. Placing the PCM layer inside the wall proves better for outdoor thermal environments during continuous air-conditioning, while situating the TIM layer inside is preferable for higher energy-saving contributions during intermittent operation. Despite intermittent operation yielding energy savings of 46.69–64.73%, it raises the peak load on the urban electricity system compared to continuous operation. Notably, for multi-layer walls with the TIM layer inside, this negative effect is negligible in comparison to their superior energy-saving benefits.

Z. Liu et al. [34] showed that the PCM can enhance lightweight building walls' (LBW) thermal performance, but optimal parameters vary by wall orientation due to outdoor thermal variations. A study tested a small-scale LBW in different orientations and analyzed PCM's impact using a heat transfer model. The results suggest that east and south-facing walls benefit from PCM in the middle temperature range (20–30°C), while west and north-facing walls perform best with inner (18–28°C) and outer (24–34°C) PCM placement. East and west-facing walls see the most significant thermal improvement, reducing peak and average heat flux by 62.8–66.4% and 28.2–29.5%, respectively, and increasing delay time by 5–5.34 hours compared to reference walls.

E. Tunçbilek et al. [35] explored combining PCMs and conventional thermal insulation for enhanced energy savings in building walls. PCM on the interior side with layer thicknesses $L_{PCM} \leq 16$ mm outperformed insulation saving up to 38.2% more energy than insulation with layer thickness $L_{INS} = 6$ mm. A parameter ψ defining the ratio of L_{PCM} to $L_{PCM} + L_{INS}$ was introduced. Combining PCM and insulation (a configuration labeled by C5 in their paper, $\psi = 0.05$) saved up to 7.3% more energy compared to insulation alone. Overall, combined designs

with $0 < \psi \leq 0.6$ showed improved energy savings compared to insulation only, with latent heat activation being crucial for better thermal performance.

Y. Cascone et al. [36] conducted a study on optimizing PCMs in retrofitting office buildings for energy efficiency in Mediterranean climates, crucial for achieving EU's 2020 sustainability goals. PCMs, with careful consideration of properties, quantity, and placement, are recommended for effective and economically feasible use. The paper presents multi-objective optimization analyses for retrofitting with PCM-enhanced opaque building envelope components. Objectives included minimizing primary energy consumption, global costs, building energy needs for heating and cooling, and investment costs. The research variables encompassed PCM properties, window type, insulation materials, and wall configuration. Post-optimization analyses provided insights for designers, revealing that optimal PCM properties are notably influenced by the HVAC system's operation.

R. F. Jam et al. [37] conducted a study for optimization of the PCMs location and thickness in building walls with an energy-economic analysis. The research emphasizes the significance of thermal insulation for reducing energy consumption in buildings. CMS are investigated as a form of insulation in an educational building at Hakim Sabzevari University, Iran. Through numerical simulations, the study explores the effects of PCM integration during the hot months of the year. Optimal PCM placement within the wall and various thicknesses (2, 3, 4, and 5 cm) are analyzed. Results indicate heat exchange reductions of 9.8%, 13.4%, 17.5%, and 20.4%, respectively, for different PCM thicknesses. Additionally, a thermo-economic analysis calculates energy savings and payback periods. The study identifies a 3 cm PCM thickness as optimal, resulting in a 50-month payback period through Pareto solutions and the TOPSIS method.

M. J. Abden et al. [38] conducted research on the combined use of phase change material and thermal insulation to improve energy efficiency of residential buildings, applying thermal insulation to external walls and ceilings is standard practice. The study evaluates the approach by combining expanded polystyrene with PCM gypsum board in a typical Australian standalone house. Numerical simulations are conducted considering the house's location in three distinct Australian cities—Darwin, Alice Springs, and Sydney—representing tropical savanna, hot semi-arid, and humid subtropical climates, respectively. Results indicate significant cost savings over a 10-year lifecycle: AU\$167.0, \$162.3, and \$39.7/m² in Darwin, Alice Springs, and Sydney, respectively. Additionally, energy ratings improve by 3.5, 3.8, and 4.3 stars in the three cities. Payback periods for the renovation vary from 2.2 to 7.5 years, contingent on climate conditions.

E. Iffa et al. [39] conducted thermal energy storage systems in buildings serve to store cooling/heating energy during non-peak load hours or when renewable energy sources are available, aiding in peak load shaving, reducing electric grid burdens, and enhancing occupant thermal comfort. While thermal lag in systems like thermally activated building systems often leads to passive energy release, integrating active insulation systems can enhance flexibility in charging and discharging energy. That study designed a wall system equipped with both active insulation and thermally activated storage systems to evaluate its performance in contributing to active cooling energy. The results showed that the thermal properties of the storage core material and the spacing of embedded pipes in both the storage and active insulation systems significantly influenced wall performance. During discharging, heat flux into the wall reached up to

81.92W/m², with the dynamic R-value of the active insulation system varying from less than 1ft²·°F·h/BTU (0.18 m²·K/W) to 98% of equally thick foam insulation's R-value.

P. Arumugam et al. [40] aimed to optimize PCM and insulation placement in building envelopes for improved thermal performance and reduced cooling load demand in Indian office buildings across different climates. Models integrated with PCM or insulation on outer walls showed more comfortable indoor temperatures than those on inner walls. The selection of PCM and insulation depended on location temperatures. The recommended techniques resulted in cooling load reductions of 64%, 61%, 57%, 63%, and 58/59% for Bangalore, Delhi, Jodhpur, Pune, and Guwahati, respectively, compared to basic buildings.

1.3. The Aim of The Dissertation

The dissertation aims to elaborate and optimize new efficient explicit numerical methods for solving linear and nonlinear heat equations. These equations account for heat conduction, convection, radiation, and heat generation in various coordinate systems, including Cartesian, cylindrical, and spherical coordinates. The approach involves developing existing numerical methods such as the Explicit-Euler-based FTCS (forward time central space), the Implicit-Euler method, the Crank-Nicolson method, the Rational Runge–Kutta method, the Dufort–Frankel (DF) method, and the UPFD (unconditionally positive finite difference) method. Additionally, new numerical methods based on a novel calculation strategy derived from the original hopscotch method were invented. These include the Shifted-Hopscotched method, Leapfrog-Hopscotch method, Asymmetric-Hopscotch method, reversed-Hopscotched and others. MATLAB 2020b used to code the numerical methods. The invented methods were verified and validated by using an analytical solution as a benchmark solution and by comparing the numerical methods results with the measurement experimental results. After that, the numerical methods can be applied to real-life heat transfer problems for various engineering applications. The new methods represented a key tool that can be used to make any thermal analysis, like calculating the temperature or the heat energy in any engineering geometry or system. In the current dissertation, we used them to make many thermal analyses on different building walls and heated cylinders, starting with very simple geometry (low stiffness system) which is an insulation wall, and reaching a very complicated geometry (high stiffness system) when the wall structure consist different materials layers (different types of Insulator and Phase Change Materials)in addition to the based materials (which either Brick or Concrete), our target controls the amount of heat transfer between the indoor and outdoor of the building to reach a sustainable building. By achieving these objectives, this research contributes to the ongoing efforts to improve energy efficiency and sustainability building.

2. THE GENERAL HEAT EQUATION

In the current study, I aim to calculate the heat transfer in different geometries. First, I start to derive the general heat energy equation (conduction, convection, and radiation equation) based on energy balance in Cartesian coordinates and then in cylindrical and spherical coordinates.

2.1. The General Heat Equation in Cartesian Coordinates

For the Cartesian coordinate, consider a small rectangular element $\Delta x, \Delta y, \Delta z$, as shown in Fig.2.1. The energy balance on this element during a small-time interval Δt can be expressed as:

$$\left(\begin{array}{l} \text{Rate of heat conduction} \\ \text{at } x, y, \text{ and } z \end{array} \right) - \left(\begin{array}{l} \text{Rate of heat conduction at} \\ x+\Delta x, y+\Delta y, \text{ and } z+\Delta z \end{array} \right) + \left(\begin{array}{l} \text{Rate of heat generation} \\ \text{inside the element} \end{array} \right) + \left(\begin{array}{l} \text{Rate of convection at} \\ x, y, z \text{ the element} \end{array} \right) + \left(\begin{array}{l} \text{Rate of radiation at} \\ x, y, z \text{ the element} \end{array} \right) = \left(\begin{array}{l} \text{Rate of change of energy} \\ \text{content of the element} \end{array} \right)$$

Or

$$Q_x + Q_y + Q_z - Q_{x+\Delta x} - Q_{y+\Delta y} - Q_{z+\Delta z} + Q_{gen} + Q_{Convection} + Q_{Radiation} = \frac{\Delta E_{element}}{\Delta t} \quad (2.1)$$

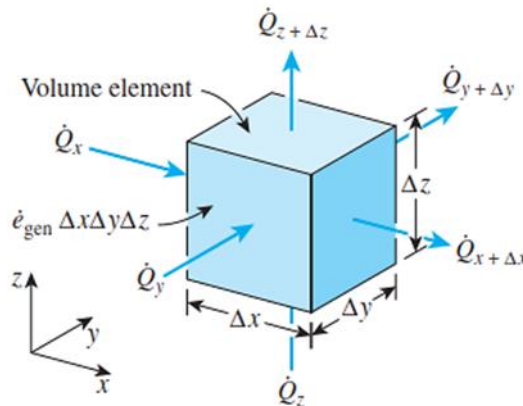


Figure 2.1. 3D rectangular element

I use the following three well-known laws:

Fourier's law of heat conduction:

$$Q_x = -k.S_x \cdot \frac{\Delta u}{\Delta x}, Q_y = -k.S_y \cdot \frac{\Delta u}{\Delta y}, Q_z = -k.S_z \cdot \frac{\Delta u}{\Delta z} \quad (2.2)$$

where $u = u(\vec{r}, t)$ is the temperature, $k = k(\vec{r})$ is the thermal conductivity of material and the surface area of heat conduction in x, y and z are $S_x = \Delta y \cdot \Delta z$, $S_y = \Delta x \cdot \Delta z$ and $S_z = \Delta x \cdot \Delta y$ respectively

Newton's law of heat convection:

$$Q_{convection} = hS\Delta u = hS(u_a - u), \quad (2.3)$$

where h represents convection heat transfer coefficient, S is the surface area, and the ambient temperature u_a does not depend directly on u , and the term hSu_a therefore included into the heat generation term.

The law of Stefan–Boltzmann for the outgoing radiation heat:

$$Q_{radiation} = \sigma^* Su^4 \quad , \quad (2.4)$$

where $\sigma^* = SB \cdot \varepsilon$, i.e., the universal constant of Stefan-Boltzmann $SB = 5.67 \times 10^{-8} \text{ W/m}^2 \text{ K}^4$ is multiplied by the suitable constant of emissivity ε where the surface is not a black body. The incoming heat radiation, which includes direct sunlight, are similarly included in the heat source term q as the hSu_a term.

$$\Delta E_{element} = E_{t+\Delta t} - E_t = mc(u_{t+\Delta t} - u_t) = \rho c \Delta V (u_{t+\Delta t} - u_t) \quad , \quad (2.5)$$

where $\rho = \rho(\bar{r})$, $c = c(\bar{r})$ and $\Delta V = \Delta x \Delta y \Delta z$ are the density, the specific heat and the elementary volume, respectively. Substituting Eqs (2.2-2.5). into Eq. (2.1), dividing by $\Delta x \Delta y \Delta z$ and taking the limit as $\Delta x, \Delta y, \Delta z, \Delta t \rightarrow 0$ yields:

$$\frac{\partial}{\partial x} \left(k \frac{\partial u}{\partial x} \right) + \frac{\partial}{\partial y} \left(k \frac{\partial u}{\partial y} \right) + \frac{\partial}{\partial z} \left(k \frac{\partial u}{\partial z} \right) + \frac{Q_{gen}}{\Delta x \Delta y \Delta z} + \frac{hSu}{\Delta x \Delta y \Delta z} + \frac{\sigma^* Su^4}{\Delta x \Delta y \Delta z} = \rho c \frac{\partial u}{\partial t} \quad (2.6)$$

Eq. (2.6) is divided by (ρc) and if k is constant, I obtain

$$\frac{k}{\rho c} \frac{\partial^2 u}{\partial x^2} + \frac{k}{\rho c} \frac{\partial^2 u}{\partial y^2} + \frac{k}{\rho c} \frac{\partial^2 u}{\partial z^2} + \frac{1}{\rho c} \frac{Q_{gen}}{\Delta x \Delta y \Delta z} - \frac{1}{\rho c} \frac{hSu}{\Delta x \Delta y \Delta z} - \frac{1}{\rho c} \frac{\sigma^* Su^4}{\Delta x \Delta y \Delta z} = \frac{\partial u}{\partial t} \quad (2.7)$$

where the property $\alpha = \frac{k}{\rho c}$ is the thermal diffusivity of the material. In this work do not consider volumetric heat generation, so the heat generation represent by all incoming heat crosses the surface element. I introduce q^* , which is the incoming heat by radiation and convection for a unit area. In all of our cases, the direction of the radiative and conductive heat transfer will always be horizontal, thus $S = \Delta y \Delta z$ and $Q_{gen} = (q^* + hu_a)S$. With these I obtain

$$\alpha \frac{\partial^2 u}{\partial x^2} + \alpha \frac{\partial^2 u}{\partial y^2} + \alpha \frac{\partial^2 u}{\partial z^2} + \frac{1}{\rho c} \frac{q^* \Delta y \Delta z}{\Delta x \Delta y \Delta z} + \frac{1}{\rho c} \frac{h \Delta y \Delta z u_a}{\Delta x \Delta y \Delta z} - \frac{1}{\rho c} \frac{h \Delta y \Delta z u}{\Delta x \Delta y \Delta z} - \frac{1}{\rho c} \frac{\sigma^* \Delta y \Delta z u^4}{\Delta x \Delta y \Delta z} = \frac{\partial u}{\partial t} \quad (2.8)$$

After simplification, I have

$$\alpha \left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + \frac{\partial^2 u}{\partial z^2} \right) + \frac{q^*}{\rho c \Delta x} + \frac{hu_a}{\rho c \Delta x} - \frac{h}{\rho c \Delta x} u - \frac{\sigma^*}{c \rho \Delta x} u^4 = \frac{\partial u}{\partial t} \quad (2.9)$$

The equation for the temperature which includes the source of heat generation, conduction, convection and radiation can be expressed as follow:

$$\frac{\partial u}{\partial t} = \alpha \nabla^2 u + q - Ku - \sigma u^4 \quad (2.10)$$

where $q = \frac{q^*}{c\rho\Delta x} + \frac{h}{c\rho\Delta x} \cdot u_a$ is the heat generation or heat source coming from the outside of the wall structure, $K = K(\bar{r}) = \frac{h}{c\rho\Delta x}$ is the heat transfer convection term, and $\sigma = \sigma(\bar{r}) = \frac{\sigma^*}{c\rho\Delta x}$ is the radiation heat transfer term. The terms q , Ku and σu^4 in Eq. (2.10) are nonnegative and still in $[\text{K}/\text{s}]$. If there is a multilayer wall, then the material properties depend on space, so an equation with a more general form can be used as follows:

$$\frac{\partial u}{\partial t} = \frac{1}{\rho c} \nabla(k\nabla u) + q - Ku - \sigma u^4 \quad (2.11)$$

2.2. The Spatial Discretization in Cartesian Coordinates

The standard central difference formula in two space dimensions is applied for the second-order derivative ($\nabla^2 u$). The space steps are Δx and Δz . Now for the nodes of a homogeneous material, one obtains

$$\frac{\partial^2}{\partial x^2} u(x_i) \approx \frac{\frac{u(x_{i+1}) - u(x_i)}{\Delta x} + \frac{u(x_{i-1}) - u(x_i)}{\Delta x}}{\Delta x} = \frac{u_{i-1} - 2u_i + u_{i+1}}{\Delta x^2} \quad (2.12)$$

$$\frac{\partial^2}{\partial z^2} u(z_i) \approx \frac{\frac{u(z_{i+N_x}) - u(z_i)}{\Delta z} + \frac{u(z_{i-N_x}) - u(z_i)}{\Delta z}}{\Delta z} = \frac{u_{i-N_x} - 2u_i + u_{i+N_x}}{\Delta z^2} \quad (2.13)$$

I obtain the spatially discretized form Eq. (2.11) in two dimensions:

$$\frac{du_i}{dt} = \alpha \frac{u_{i-1} - 2u_i + u_{i+1}}{\Delta x^2} + \alpha \frac{u_{i-N_x} - 2u_i + u_{i+N_x}}{\Delta z^2} + q - Ku_i - \sigma u_i^4 \quad (2.14)$$

Now to be more realistic, so let the k , c , and ρ quantities be a function of space. Then Eqs. (2.12), and (2.13) can be written using a two-dimensional, equidistant grid in the following form:

$$\frac{\partial^2 u(x_i)}{\partial x^2} = \frac{1}{c(x_i)\rho(x_i)\Delta x} \left[k\left(x_i + \frac{\Delta x}{2}\right) \frac{u(x_i + \Delta x) - u(x_i)}{\Delta x} + k\left(x_i - \frac{\Delta x}{2}\right) \frac{u(x_i - \Delta x) - u(x_i)}{\Delta x} \right] \quad (2.15)$$

$$\frac{\partial^2 u(z_i)}{\partial z^2} = \frac{1}{c(z_i)\rho(z_i)\Delta z} \left[k\left(z_i + \frac{\Delta z}{2}\right) \frac{u(z_i + \Delta z) - u(z_i)}{\Delta z} + k\left(z_i - \frac{\Delta z}{2}\right) \frac{u(z_i - \Delta z) - u(z_i)}{\Delta z} \right] \quad (2.16)$$

I now change from node to cell variables, which means that u_i , c_i , and ρ_i will be the temperature, specific heat, and density of cell i , respectively. Furthermore, since the material boundaries will always coincide with the cell borders, I write the average $\frac{k_i + k_{i+1}}{2}$ instead of

$k\left(x_i + \frac{\Delta x}{2}\right)$. Now the discretized form of Equation (2.11) will take the form

$$\begin{aligned} \frac{du_i}{dt} = & \frac{1}{c_i\rho_i\Delta x} \left(\frac{k_i + k_{i+1}}{2} \frac{u_{i+1} - u_i}{\Delta x} + \frac{k_i + k_{i-1}}{2} \frac{u_{i-1} - u_i}{\Delta x} \right) + \frac{1}{c_i\rho_i\Delta z} \left(\frac{k_i + k_{i+N_x}}{2} \frac{u_{i+N_x} - u_i}{\Delta z} + \frac{k_i + k_{i-N_x}}{2} \frac{u_{i-N_x} - u_i}{\Delta z} \right) \\ & + q - Ku_i - \sigma u_i^4 \end{aligned} \quad (2.17)$$

The distance between the centres of neighbouring cells is the same as the mesh spacings, and the interface area between cell i and its right neighbour is always S . Now I have

$$\frac{du_i}{dt} = \frac{1}{c_i \rho_i \Delta x \Delta y \Delta z} \left(\Delta y \Delta z \frac{k_i + k_{i+1}}{2} \frac{u_{i+1} - u_i}{\Delta x} + \Delta y \Delta z \frac{k_i + k_{i-1}}{2} \frac{u_{i-1} - u_i}{\Delta x} \right. \\ \left. + \Delta x \Delta y \frac{k_i + k_{i+N_x}}{2} \frac{u_{i+N_x} - u_i}{\Delta z} + \Delta x \Delta y \frac{k_i + k_{i-N_x}}{2} \frac{u_{i-N_x} - u_i}{\Delta z} \right) + q - Ku_i - \sigma u_i^4 \quad (2.18)$$

The heat capacity of the cell can be calculated as $C_i = c_i \rho_i V$. I calculate the horizontal and vertical thermal resistances between the neighbouring cells, as $R_{i,i+1} \approx \frac{\Delta x}{2k_i \Delta z} + \frac{\Delta x}{2k_{i+1} \Delta z}$, and $R_{i,i+N_x} \approx \frac{\Delta z}{2k_i \Delta x} + \frac{\Delta z}{2k_{i+N_x} \Delta x}$ respectively. With these quantities, the spatially (but still not temporarily) discretized form of Equation (2.14) can be expressed as below:

$$\frac{du_i}{dt} = \frac{u_{i-1} - u_i}{R_{i-1,i} C_i} + \frac{u_{i+1} - u_i}{R_{i+1,i} C_i} + \frac{u_{i-N_x} - u_i}{R_{i-N_x,i} C_i} + \frac{u_{i+N_x} - u_i}{R_{i+N_x,i} C_i} + q - Ku_i - \sigma u_i^4 \quad (2.19)$$

The time is discretized uniformly with time-step size Δt and represents the temperature of cell i at the time $n\Delta t$, $n=0, 1, \dots, T$. Now the formulae of the used methods are presented for the general discretization (2.19) only. For the simpler formula, I need to define the following quantities:

$$r_i = \Delta t \sum_{j \neq i} \frac{1}{C_i R_{ij}}, \quad A_i = \Delta t \sum_{j \neq i} \frac{u_j^n}{C_i R_{ij}} + \Delta t \cdot q_i \quad \text{and} \quad A_i^{\text{new}} = \Delta t \sum_{j \neq i} \frac{u_j^{\text{pred}}}{C_i R_{ij}} + \Delta t \cdot q_i$$

We prefer to use the ODE system for a general grid, which gives the time derivative of each temperature independently of any coordinate system

$$\frac{du_i}{dt} = \sum_{j \neq i} \frac{u_j - u_i}{R_{i,j} C_i} + q_i - Ku_i - \sigma u_i^4 \quad (2.20)$$

Which can be written in matrix form

$$\frac{d\bar{u}}{dt} = M\bar{u} + Q, \quad (2.21)$$

where $Q = \bar{q}_i - K\bar{u}_i - \sigma\bar{u}_i^4$, and the diagonal element of matrix M can be written as follows

$$m_{ii} = \sum_{j \in \text{neighbour}} \frac{-1}{R_{i,j} C_i}. \quad \text{The off-diagonal } m_{ij} = 1/R_{i,j} C_i \text{ element of the } M \text{ matrix can be nonzero only}$$

if the cells i and j are neighbours. From this point, all summations are going over the neighbours of the actual cell, which will be denoted by $j \in n(i)$. Unless stated otherwise, we consider closed (zero Neumann) boundary conditions, i.e., the edge of the examined domain is thermally isolated regarding conductive type heat transfer. To help the reader to imagine, we present the arrangement of the variables in Figure 2.2 for a 2D system. We emphasize that the shape and arrangement of the cells are not necessarily regular.

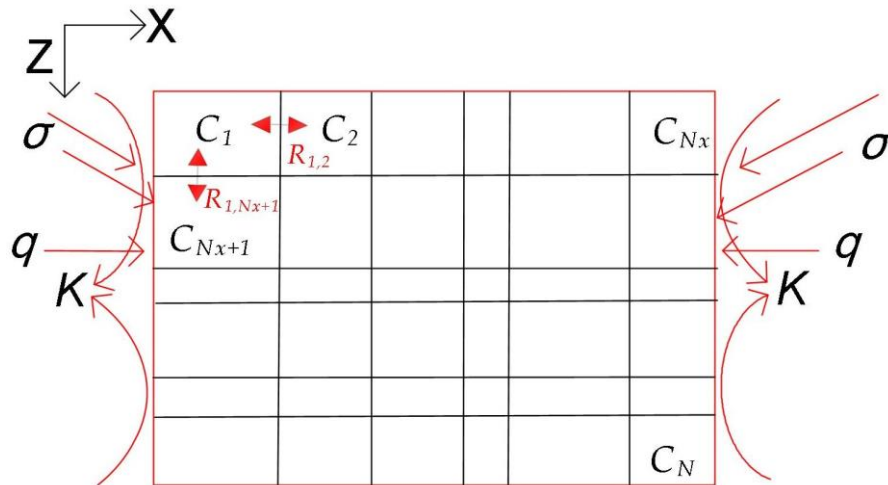


Figure 2.2. Arrangement of the generalized variables

For this system, the system of ODEs in matrix form can be written as

$$\frac{d}{dt} \begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \end{pmatrix} = \begin{pmatrix} \frac{-1}{C_1 R_{12}} + \frac{-1}{C_1 R_{13}} & \frac{1}{C_1 R_{12}} & \frac{1}{C_1 R_{13}} & 0 \\ \frac{C_2 R_{21}}{1} & \frac{-1}{C_2 R_{21}} + \frac{-1}{C_2 R_{23}} + \frac{-1}{C_2 R_{24}} & \frac{C_2 R_{23}}{1} & \frac{-1}{C_2 R_{24}} \\ \frac{C_3 R_{31}}{1} & \frac{1}{C_3 R_{32}} & \frac{-1}{C_3 R_{31}} + \frac{-1}{C_2 R_{32}} + \frac{-1}{C_2 R_{34}} & \frac{C_3 R_{34}}{1} \\ 0 & \frac{1}{C_4 R_{42}} & \frac{1}{C_4 R_{43}} & \frac{-1}{C_4 R_{42}} + \frac{-1}{C_4 R_{43}} \end{pmatrix} \begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \end{pmatrix} = \begin{pmatrix} Q_1 \\ Q_2 \\ Q_3 \\ Q_4 \end{pmatrix}$$

2.3. The General Heat Equation in Cylindrical and Spherical Coordinates

In a similar way, the general heat equation in cylindrical coordinates can be obtained from an energy balance on a volume element in cylindrical coordinates, considering a small 3D cylindrical element as shown in Fig. 2.3. The energy balance in this element during a time interval can be expressed as:

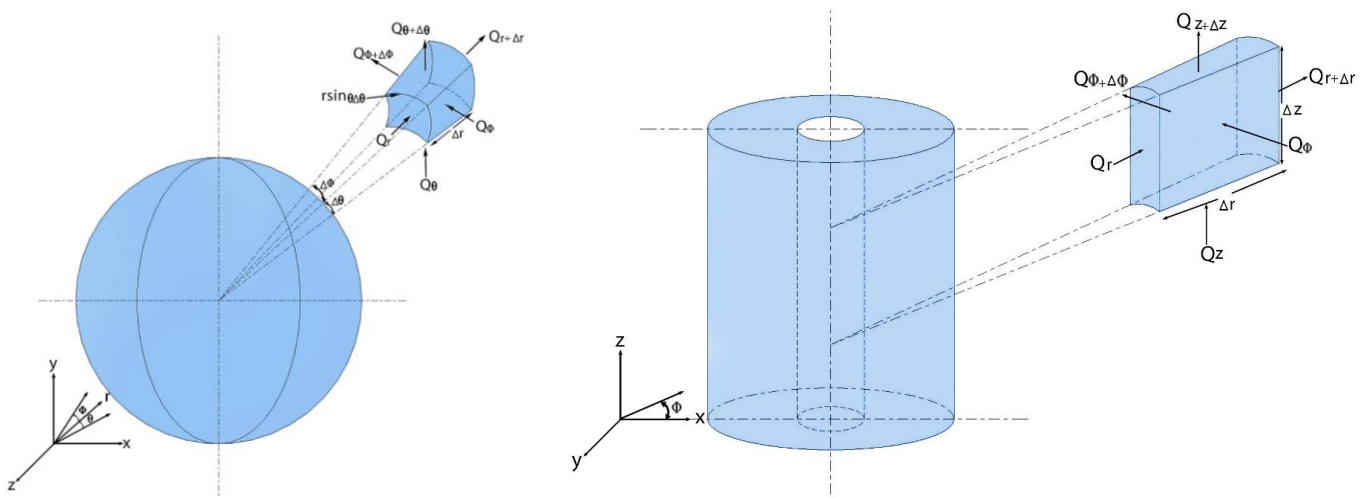


Figure 2.3. The cylindrical (left) and spherical (right) elements

$$\left(\begin{array}{l} \text{Rate of heat conduction} \\ \text{at } r, \phi, z \end{array} \right) - \left(\begin{array}{l} \text{Rate of heat conduction at} \\ r + \Delta r, \phi + \Delta \phi, z + \Delta z \end{array} \right) + \left(\begin{array}{l} \text{Rate of heat generation inside} \\ \text{and on the surface of the element} \end{array} \right) \pm \left(\begin{array}{l} \text{Rate of convection} \\ \text{at the } r, \phi, z \text{ element} \end{array} \right) \\ \pm \left(\begin{array}{l} \text{Rate of radiation} \\ \text{at the } r, \phi, z \text{ element} \end{array} \right) = \left(\begin{array}{l} \text{Rate of change of energy} \\ \text{content of the element} \end{array} \right)$$

or briefly,

$$Q_r + Q_\phi + Q_z - Q_{r+\Delta r} - Q_{\phi+\Delta \phi} - Q_{z+\Delta z} + Q_{gen} \pm Q_{convection} \pm Q_{radiation} = \frac{\Delta E_{element}}{\Delta t} \quad (2.22)$$

To fill Eq. (2.22) with concrete formulas, the following three well-known laws are used.

Fourier's law of heat conduction:

$$Q_r = -kS \frac{\Delta u}{\Delta r}, Q_\phi = -kS \frac{\Delta u}{\Delta \phi}, Q_z = -kS \frac{\Delta u}{\Delta z} \quad (2.23)$$

The heat convection, radiation and the change in energy of an element over a specific time interval are the same in Cartesian coordinate except the element volume be $\Delta V = \Delta \phi (r + \Delta r/2) \Delta r \times \Delta z$. In the case of full cylindrical symmetry, it is better to choose a full ring-shaped element, which yields $\Delta V = 2\pi (r + \Delta r/2) \Delta r \times \Delta z = \pi ((r + \Delta r)^2 - r^2) \Delta z$.

From these equations, one can derive the heat-transport equation in a 3D cylindrical coordinate system, which can be written as:

$$\frac{1}{r} \frac{\partial}{\partial r} \left(k r \frac{\partial u}{\partial r} \right) + \frac{1}{r^2} \frac{\partial}{\partial \phi} \left(k r \frac{\partial u}{\partial \phi} \right) + \frac{\partial}{\partial z} \left(k \frac{\partial u}{\partial z} \right) + \frac{Q_{gen}}{\Delta V} - \frac{hSu}{\Delta V} - \frac{\sigma^* Su^4}{\Delta V} = \rho c \frac{\partial u}{\partial t} \quad (2.24)$$

In the case of spherical coordinates, a small 3D spherical element can be seen in Figure 2.2 The heat-transport equation for this case can be expressed as follows:

$$\frac{1}{r^2} \frac{\partial}{\partial r} \left(k r^2 \frac{\partial u}{\partial r} \right) + \frac{1}{r^2 \sin^2 \theta} \frac{\partial}{\partial \phi} \left(k r \frac{\partial u}{\partial \phi} \right) + \frac{1}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \left(k \sin \theta \frac{\partial u}{\partial \theta} \right) + \frac{Q_{gen}}{\Delta V} - \frac{hSu}{\Delta V} - \frac{\sigma^* Su^4}{\Delta V} = \rho c \frac{\partial u}{\partial t} \quad (2.25)$$

2.4. The Spatial Discretization in Cylindrical and Spherical Coordinate

In the case of cylindrical geometry, I consider tube-shaped cells with height Δz and thickness Δr . For spheres, the cells have spherical-shell shapes with thickness Δr again. The temperature is considered at the middle of the cell layer, where the radial distance from the origin (the mean radius of the cells) is denoted by r_i , while the subsequent radius of the cell border is denoted by $r_i^* = r_i + \Delta r/2$.

The cell's heat capacity in the cylindrical and in the spherical case is approximated as $C_i = c_i \rho_i \pi (r_{i+1}^{*2} - r_i^{*2}) \Delta z$ and $C_i = c_i \rho_i \frac{4}{3} \pi (r_{i+1}^{*3} - r_i^{*3})$, respectively.

Let us denote the area of the cylindrical cell-surface perpendicular to r with S_r , which can be given as $S_r = 2\pi r \Delta z$. Now, for the thermal resistance in the r -direction, the approximate formula

$$R_{i,i+1} \approx \int_{r_i}^{r_{i+1}} \frac{dr}{k_{i,i+1} S_r} = \int_{r_i}^{r_{i+1}} \frac{dr}{k_{i,i+1} 2\pi r \Delta z} = \frac{\ln(r_{i+1} - r_i)}{2\pi k_{i,i+1} \Delta z} \quad (2.26)$$

is used. For the thermal resistance in the z -direction, the approximate formula $R_{i,i+N_x} \approx \frac{(z_{i+N_x} - z_i)}{k_i \pi (r_{i+1}^2 - r_i^2)}$ is used, where the cell $i + N_x$ is below the cell i .

In the spherical case, S_r can be given as $S_r = 4\pi r^2$. Using this, the thermal resistance is calculated similarly as that in the cylindrical case, but now the integration yields $R_{i,i+1} \approx \frac{1}{4\pi k_{i,i+1}} \frac{r_{i+1} - r_i}{r_i r_{i+1}}$. From Equations (2.24) and (2.25) it is easy to obtain the ODE system

$$\frac{du_i}{dt} = \sum_{j \neq i} \frac{u_j - u_i}{R_{i,j} C_i} + \frac{Q_{gen}}{C_i} - \frac{h S u_i}{C_i} - \frac{\sigma^* S u_i^4}{C_i} \quad (2.27)$$

to determine the time-evolution of the cell temperatures. Here, S is the area of the surface on which the convection and radiation occurs, which will be the outer surface of the cylinder in Fig 2.3. If one neglects the higher powers of Δr , one can easily derive that $C_i / S = c_i \rho_i \Delta r$ in both cases. Let us use the following notations:

$$K = \frac{h}{c \rho \Delta r}, \quad \sigma = \frac{\sigma^*}{c \rho \Delta r}, \quad q = \frac{\sigma^*}{c \rho \Delta r} u_a^4 + \frac{h}{c \rho \Delta r} \cdot u_a$$

Inserting these into (2.27), I can write Equation (2.27) in a simpler form:

$$\frac{du_i}{dt} = \sum_{j \neq i} \frac{u_j - u_i}{R_{i,j} C_i} + q_i - K u_i - \sigma u_i^4, \quad (2.28)$$

which will be solved numerically.

3. NUMERICAL METHODS TO SOLVE THE HEAT EQUATION

There are plenty of numerical methods used to solve the heat equation, such as finite difference schemes (FDM) [41-43] and finite element methods (FEM) [44]. However, they can be extremely time-consuming since the examined system must be fully discretized both in space and time. Due to material inhomogeneities, the eigenvalues of the problem can have a very wide range (several orders of magnitude). In these cases, the problem is rather stiff, and the so-called CFL (Courant–Friedrichs–Lewy) threshold for the time step size is very small. When conventional explicit finite difference methods are applied to these problems, they will be unstable when the used time step size is larger than this small limit. That is why implicit methods, which have much better stability properties, are typically used for solving these kinds of equations, for example [45-51]. They solve equation systems containing the whole system matrix; thus, they can use a lot of CPU time and computer memory, especially when the number of cells is large, which is always the case in three dimensions.

It is well known that the former rapid increase in CPU clock frequencies is over, and the tendency toward increasing parallelization in high-performance computing is powerful [52,53]. Thus, I think time is on the side of explicit methods because they can be much more straightforwardly parallelized. That is why I started to investigate explicit algorithms with improved stability properties. These explicit methods can also serve as a basis for implicit methods.

3.1. The Already Known Numerical Methods

There are many explicit algorithms developed for heat conduction, convection, and radiation equations. Some of them are unconditionally stable for the linear heat conduction equation, and have special characteristics to deal with nontrivial cases., more detail in the following:

3.1.1. The Explicit-Euler Method

The most widespread explicit algorithm to solve the heat equation is the FTCS (forward time central space) scheme, in which the time integration is based on the Explicit Euler Method. Now I adapt this to the general heat equation in the most standard way, thus the general formula is the following:

$$u_i^{n+1} = (1 - r_i)u_i^n + A_i - \Delta t \cdot K_i \cdot u_i^n - \Delta t \cdot \sigma_i \cdot (u_i^n)^4 \quad . \quad (3.1)$$

3.1.2. The Crank- Nicolson Method

The Crank-Nicolson method provides an alternative implicit scheme, to provide accuracy, difference approximations are developed at the midpoint of the time increment, and it is unconditionally stable, second-order accurate in both space and time, suitable for stiff systems, thus the general formula is the following:

$$u_i^{n+1} = \frac{\left(1 - \frac{r_i}{2}\right)u_i^n + A_i + 1 - \Delta t \cdot K_i \cdot u_i^n - \Delta t \cdot \sigma_i \cdot (u_i^n)^4}{1 + r_i \left(1 - \frac{1}{2}\right)} \quad . \quad (3.2)$$

3.1.3. The UPFD Method

The UPFD method is constructed by Chen-Charpentier and Kojouharov [54] for the linear diffusion-advection-reaction equation. Recently I adapted it to the general heat equation as follows:

$$u_i^{n+1} = \frac{u_i^n + A_i}{1 + r_i + \Delta t \cdot K_i + \Delta t \cdot \sigma_i \cdot (u_i^n)^3}. \quad (3.3)$$

3.1.4. The Dufort–Frankel Method

The Dufort–Frankel (DF) algorithm is a known but non-traditional explicit scheme [55] that is unconditionally stable for the linear heat equation. Now the formula for the case of Eq. (2.20) and (2.28) is as follows:

$$u_i^{n+1} = \frac{(1-r_i)u_i^{n-1} + 2A_i - 2 \cdot \Delta t \cdot K \cdot u_i^n - 2 \cdot \Delta t \cdot \sigma \cdot (u_i^n)^4}{1 + r_i} \quad (3.4)$$

One can see that the formulas contain u_i^{n-1} , thus it is a two-step but one-stage method. Since it is not a self-starter, another method must be used to start the DF method by the calculation of u_i^1 . For this purpose, I apply the UPFD formula (3.3).

3.1.5. The Rational Runge–Kutta Methods

From the family of the Rational Runge-Kutta methods, I chose a two-stage version [56] with the following definition. In the first stage, a full step is taken by the explicit Euler (FTCS) scheme to obtain the predictor value. The increment for Eq. (2.20) is calculated as

$$g_i^1 = r(u_{i-1}^n - 2u_i^n + u_{i+1}^n) + \Delta t \cdot q - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4,$$

and

$$g_i^1 = -ru_i^n + A_i - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4.$$

Using these g_i^1 values, the predictor values can be obtained for all grid types as

$$u_i^{\text{pred}} = u_i^n + g_i^1.$$

After this, using the predictor values obtained above, the increment of a second Euler step is calculated:

$$g_i^2 = r(u_{i-1}^{\text{pred}} - 2u_i^{\text{pred}} + u_{i+1}^{\text{pred}}) + \Delta t \cdot q - \Delta t \cdot K \cdot u_i^{\text{pred}} - \Delta t \cdot \sigma \cdot (u_i^{\text{pred}})^4,$$

$$\text{and } g_i^2 = -r_i u_i^{\text{pred}} + A_i^{\text{new}} - \Delta t \cdot K \cdot u_i^{\text{pred}} - \Delta t \cdot \sigma \cdot (u_i^{\text{pred}})^4.$$

Now one needs to calculate the following scalar products

$$p_1 = (\vec{g}^1, \vec{g}^1) = \sum_{i=1}^N g_i^1 g_i^1, \quad p_{12} = (\vec{g}^1, \vec{g}^2) = \sum_{i=1}^N g_i^1 g_i^2, \quad p_2 = (\vec{g}^2, \vec{g}^2) = \sum_{i=1}^N g_i^2 g_i^2,$$

and with them one obtains the final expression for the new values of the variable:

$$u_i^{n+1} = u_i^n + \frac{2p_1g_i^1 - 2p_{12}g_i^1 + p_1g_i^2}{4p_1 - 4p_{12} + p_2} \quad (3.5)$$

3.1.6. The Heun's Method

Heun's method, sometimes called explicit trapezoidal rule, is probably the most common second-order Runge-Kutta (RK) scheme for ODEs and ODE systems [57], so it is straightforward to use it as a component of method of lines. It starts with a predictor step, which is an explicit Euler stage. In the cases of Eq. (2.20) and (2.28), it has the form:

$$u_i^{\text{pred}} = (1-r_i)u_i^n + A_i - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4.$$

Now the corrector step follows, which uses the average of the obtained and the old values of the u variable:

$$u_i^{n+1} = u_i^n - r_i \frac{u_i^n + u_i^{\text{pred}}}{2} + \frac{\Delta t}{2} \left(A_i + A_i^{\text{new}} - K \cdot (u_i^n + u_i^{\text{pred}}) - \sigma \cdot (u_i^n + u_i^{\text{pred}})^4 \right) \quad (3.6)$$

3.1.7. The Original Odd-Even Hopscotch Method

To use an odd-even hopscotch method, a special, so-called bipartite spatial grid is necessary, where the cells are labelled as odd and even, and similarly to a checkerboard, all the nearest neighbors of the odd cells are even and vice versa. The odd-even labels are interchanged in each time step as is shown in Fig. 3.1A. Originally, the standard explicit Euler formula was applied in the first stage and the implicit Euler formula was applied in the second stage [58]. The general formulas are the following:

$$\text{Explicit Euler: } u_i^{n+1} = (1-r_i)u_i^n + A_i - \Delta t \cdot K_i \cdot u_i^n - \Delta t \cdot \sigma_i \cdot (u_i^n)^4 \quad (3.7)$$

$$\text{Implicit Euler: } u_i^{n+1} = \frac{u_i^n + A_i^{\text{new}}}{1+r_i + \Delta t \cdot K_i + \Delta t \cdot \sigma_i \cdot (u_i^n)^3}, \quad (3.8)$$

Note that the implicit formula is effectively explicit since the u_j^{n+1} values have been just obtained at Stage 1. I call this version the original odd-even hopscotch (OOEH) method. This algorithm is unconditionally stable for the linear heat conduction equation. However, in the nonlinear cases, the new temperatures can be negative for large r , which can cause unstable behavior for large time step sizes due to the possibly large negative value of the term $(u_i^n)^3$ in the denominator. To avoid this, I apply a simple trick of forbidding negative values by the following simple conditional statement:

$$\text{if } u_i^{n+1} < 0 \text{ then } u_i^{n+1} = 0. \quad (3.9)$$

This trick will be applied in all cases in this method and the remaining methods when there is a possibility of negative temperatures.

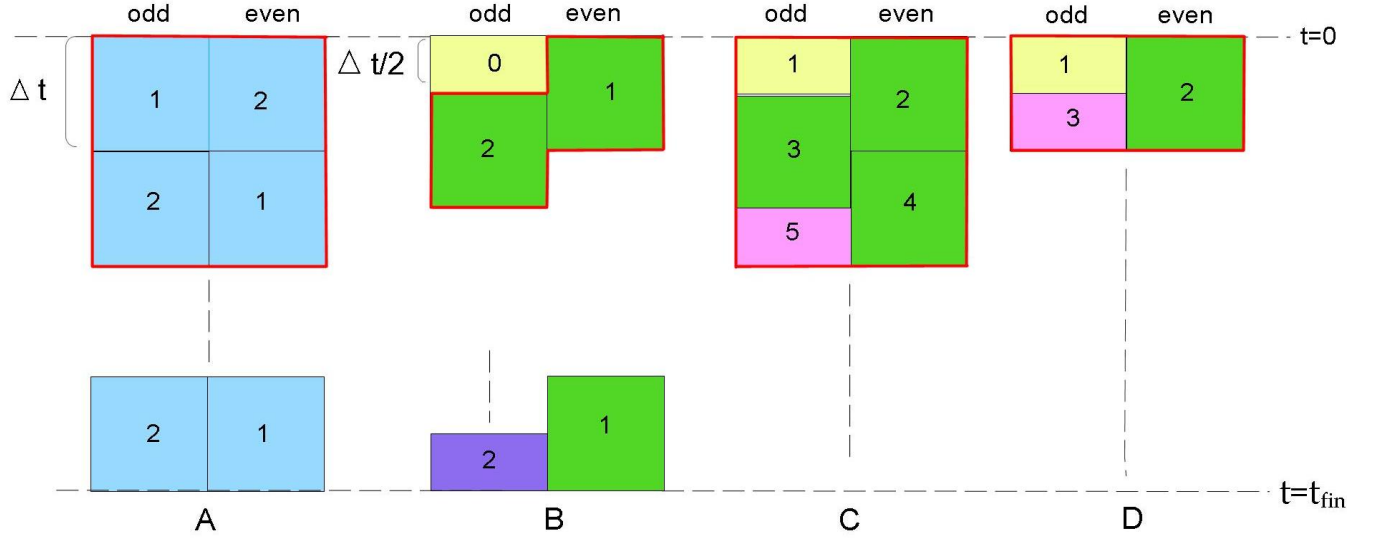


Figure 3.1. Space-time structure of (A) The original hopscotch and the reversed hopscotch methods. (B) The shifted-hopscotch method. (C) The leapfrog-hopscotch method. (D) The asymmetric hopscotch method.

3.2. The Invented Numerical Methods

3.2.1. The Constant Neighbor Method

The constant neighbor (CNe) method [28] for Equation (2.20) and (2.28) is:

$$u_i^{n+1} = u_i^n \cdot e^{-r_i} + \frac{A_i}{r_i} (1 - e^{-r_i}) + \Delta t \cdot q - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4. \quad (3.10)$$

To proceed, let us recall that the following general time discretization implies the so-called theta method:

$$\frac{u_i^{n+1} - u_i^n}{\Delta t} = \frac{\alpha}{\Delta x^2} \left[\theta (u_{i-1}^n - 2u_i^n + u_{i+1}^n) + (1-\theta) (u_{i-1}^{n+1} - 2u_i^{n+1} + u_{i+1}^{n+1}) \right] + q - K \cdot u_i^n - \sigma \cdot (u_i^n)^4, \quad (3.11)$$

where $\theta \in [0,1]$. After rearrangement we have

$$u_i^{n+1} = u_i^n + r \left[\theta (u_{i-1}^n - 2u_i^n + u_{i+1}^n) + (1-\theta) (u_{i-1}^{n+1} - 2u_i^{n+1} + u_{i+1}^{n+1}) \right] + \Delta t \cdot q - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4, \quad (3.12)$$

For $\theta = 0, \frac{1}{2}$, and 1 one has the (standard) implicit Euler, the Crank–Nicolson, and the explicit Euler (FTCS) schemes, respectively [59]. If $\theta < 1$, the theta method is implicit. It can be modified to be explicit by taking the neighbors into account at the old-time level, where their values are already calculated. Thus, one can insert $u_{i\pm 1}^n$ into the theta-scheme (3.12) instead of $u_{i\pm 1}^{n+1}$ to obtain

$$u_i^{n+1} = u_i^n - 2r\theta u_i^n - 2r(1-\theta)u_i^{n+1} + r(u_{i-1}^n + u_{i+1}^n) + \Delta t \cdot q - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4 \quad (3.13)$$

With this modification, the final formula is completely explicit:

$$u_i^{n+1} = \frac{(1-2r\theta)u_i^n + r(u_{i-1}^{n+1} + u_{i+1}^{n+1}) + \Delta t \cdot q - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4}{1+2r(1-\theta)} \quad (3.14)$$

3.2.2. The Two-Stage and Three-Stage Linear-Neighbor Method

The next method is the two-stage linear-neighbor (LNe or LNe2) method [60]. It is based on the CNe method, which is used as a predictor to calculate new u_i^{pred} values valid at the end of the actual time step. Using them I can calculate slopes for the special equidistant case:

$$s_i = \frac{r}{\Delta t^2} \left(u_{i-1}^{\text{pred}} + u_{i+1}^{\text{pred}} - u_{i-1}^n - u_{i+1}^n \right)$$

and then the corrector values for the two-stage LNe method:

$$u_i^{n+1} = u_i^n e^{-2r} + \frac{u_{i-1}^n + u_{i+1}^n}{2} (1 - e^{-2r}) + s_i \frac{\Delta t^2}{2r} \left(1 - \frac{1 - e^{-2r}}{2r} \right) + \Delta t \cdot q - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4$$

For the general case, I can make the corrector step as follows:

$$u_i^{n+1} = u_i^n e^{-r_i} + \left(A_i - \frac{A_i^{\text{new}} - A_i}{r_i} \right) \frac{1 - e^{-r_i}}{r_i} + \frac{A_i^{\text{new}} - A_i}{r_i} - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4. \quad (3.15)$$

The values given in Equation (3.13) can be used to recalculate A_i^{new} again, which makes sense to repeat (3.15) to obtain new results. In this case, I have three stages altogether, thus the method is called the LNe3 method [60]. This algorithm is still second order, but more accurate than LNe2.

3.2.3. The CpC Algorithm

Two-stage Constant-neighbour CpC [61], generally starts with a fractional time step with length $p\Delta t$, and Constant-neighbour with full time step briefly: CpC, but here I take $p = 1/2$, because this version usually has better accuracy than for other values of p . So, in the first stage, I calculate new predictor values of the variables with the CNe formula, but with a $\Delta t_1 = \Delta t / 2$ time step:

$$u_i^{\text{pred}} = u_i^n \cdot e^{-r} + \frac{u_{i-1}^n + u_{i+1}^n}{2} (1 - e^{-r}) + \Delta t \cdot q - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4$$

$$\text{and } u_i^{\text{pred}} = u_i^n e^{-r_i/2} + \frac{A_i}{r_i} (1 - e^{-r_i/2}) - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4. \quad (3.16)$$

In the second stage, I can use $A_i^{\text{new}} = \Delta t \sum_{j \neq i} \frac{u_j^{\text{pred}}}{C_i R_{ij}}$ with Δt_1 and take a full-time step size corrector step using the CNe formula again. Thus, the final values at the end of the time step are

$$u_i^{n+1} = u_i^n \cdot e^{-2r} + \frac{u_{i-1}^{\text{pred}} + u_{i+1}^{\text{pred}}}{2} (1 - e^{-2r}) + \Delta t \cdot q - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4$$

$$u_i^{n+1} = u_i^n \cdot e^{-r_i} + \frac{A_i^{\text{new}}}{r_i} (1 - e^{-r_i}) - \Delta t \cdot K \cdot u_i^n - \Delta t \cdot \sigma \cdot (u_i^n)^4 \quad (3.17)$$

3.2.4. The Reversed Odd-Even Hopscotch Method

The reversed odd-even hopscotch method (ROEH) is different from the OOEH method because it applies the formulas in the opposite order: first the implicit Euler (3.8), then the nonstandard explicit Euler formulas (3.7), with condition (3.9). However, when first-stage

calculations begin with the implicit formula, the new values of the neighbors are not known. In the ROEH method, they are taken into account in the old time level, which is the same trick as the UPFD method uses.

3.2.5. The Shifted-Hopscotch Method

In the shifted-hopscotch (SH) method [62], the repeating block consists of five stages, two of them are half and three of them are full-time steps. These altogether span two integer time steps for the odd and the even cells as well, as one can see in Figure 3.1C. The first half-sized time step is taken for the odd cells with the following general formula:

$$u_i^{n+1/2} = \frac{u_i^n + A_i + \Delta t \cdot q}{1 + 2r + \Delta t \cdot K + \Delta t \cdot \sigma \cdot (u_i^n)^3} \quad (3.18)$$

Which is symbolized by a yellow box with the number 1 in the figure. Then, a full-time steps are taken strictly alternately with the following formula:

$$u_i^{\mu+1} = \frac{(1-r_i/2)u_i^\mu + A_i^{\mu+1/2} + \Delta t \cdot q}{1 + r + \Delta t \cdot K + \Delta t \cdot \sigma \cdot (u_i^\mu)^3} \quad (3.19)$$

The upper index μ is n for the even nodes and $n+1$ for the odd nodes. for the even, the odd, and the even cells follows again, which are symbolized by green boxes with the numbers 2, 3, and 4 in the figure. Finally, a half-length time step (pink box with number 5 inside) for the odd cells closes the calculation with the formula

$$u_i^{n+2} = \frac{(1-r_i)u_i^{n+1} + A_i^{n+3/2} + \Delta t \cdot q}{1 + \Delta t \cdot K + \Delta t \cdot \sigma \cdot (u_i^{n+1})^3} \quad (3.20)$$

with condition (3.9) again.

3.2.6. The Leapfrog-Hopscotch Method

The leapfrog-hopscotch (LH) method [63] has a structure consisting of two half and several full time steps as one can see in Fig. 3.1B. In the first stage (yellow box in the figure), the general formulas (3.18) are used, Then, for the even and odd nodes, full-time steps (denoted by green boxes in the figure) are taken strictly alternately with the formulas (3.29) with condition (3.9). It is important that always the latest available values of the neighbors are used (for example in $A_i^{\mu+1/2}$) when the new values of u are calculated, regardless of the size of the time step. This alternation goes on until the end of the last timestep (purple box in Figure 1B), where (3.19) is used again, but with a halved time step size, in order to reach the same final time point as the even nodes.

3.2.7. The Asymmetric Hopscotch Method

The Asymmetric Hopscotch (ASH) Method is very similar to the SH method, but contains less integer stages, thus uses three stages instead of five (see Fig. 3.1D). The calculation starts with a half- time step size for the odd cell with (3.18). Then a full-time step is coming for the even cell with formula (3.19) and condition (3.9), and finally a half-time step size with (3.20), again with condition (3.9) for the last odd cell closes the calculation of the values.

3.2.8. The Pseudo-Implicit Method

The pseudo-implicit (PI) method is Algorithm 5 from [64] with parameter $\lambda = 1$. For Eq. (2.20) and (2.28) the following two-stage algorithm is applied:

$$\text{Stage 1: } u_i^{\text{pred}} = \frac{u_i^n + A_i/2}{1 + r_i + \Delta t \cdot K + \Delta t \cdot \sigma \cdot (u_i^n)^3} \quad (3.21)$$

$$\text{Stage 2: } u_i^{n+1} = \frac{(1 - r_i)u_i^n + A_i^{\text{new}}}{1 + r_i + \Delta t \cdot K + \Delta t \cdot \sigma \cdot (u_i^{\text{pred}})^2 \cdot u_i^n} \quad (3.22)$$

One can see that this algorithm is fully explicit, and the convection and the radiation term is treated in a quite sophisticated way at the second stage, since both the u_i^n and the u_i^{pred} values are used.

3.3. The Optimization of Shifted-Hopscotch Method Combinations

I constructed and tested novel numerical algorithms to solve the non-stationary diffusion (or heat conduction) equation:

$$\frac{\partial u}{\partial t} = \alpha \nabla^2 u \quad (3.23)$$

The new algorithms are fully explicit time-integrators obtained by a half-time step and applied different formulas in different stages. All of the algorithms consist of five stages, but they are one-step methods in the sense that when the new values of the unknown function u are calculated, only the most recently calculated u values are used, thus the methods can be implemented such that only one array of storage is required for the u variable, which means that the memory requirement is very low. I applied the conventional theta-method with 9 different values of θ and the non-conventional CNe method to construct 10^5 combinations in the case of small systems with random parameters, and examined the competitiveness of the best algorithms by testing them in case of large systems against popular solvers.

The calculation starts with taking a half-sized time step for the odd nodes (subset A) using the already calculated u_i^n values. Then a full-time step is made for the even nodes (subset B), then for the odd cells and the even nodes again. Finally, a half-size time step closes the calculation of the values, as one can see in Figure 3.1.C. In each stage, I use the latest available u values of the neighbors, which means that the constructed methods are fully explicit and the previous values needn't to be stored at all. Thus, I have a structure consisting of 5 stages, which correspond to 5 partial time steps, which altogether span two time steps for odd and even cells, too.

By applying the well-known central difference formula (2.12) to Eq. (3.23) in one dimension, a system of ordinary differential equations (ODEs) can be obtained for nodes $i = 1, \dots, N - 2$:

$$\frac{du_i}{dt} = \alpha \frac{u_{i-1} - 2u_i + u_{i+1}}{\Delta x^2}. \quad (3.24)$$

The form of this equation for the first and last node depends on the concrete boundary conditions which will be discussed later. I define a matrix M with the following elements:

$$m_{ii} = -\frac{2\alpha}{\Delta x^2} \quad (1 < i < N), \quad m_{i,i+1} = \frac{\alpha}{\Delta x^2} \quad (1 \leq i < N), \quad m_{i,i-1} = \frac{\alpha}{\Delta x^2} \quad (1 < i \leq N), \quad (3.25)$$

which is tridiagonal in the currently discussed one-dimensional case. Now equation-system (3.25) can be written into a condensed matrix-form:

$$\frac{d\bar{u}}{dt} = M\bar{u} \quad (3.26)$$

I recall that the following general time-discretization

$$\frac{u_i^{n+1} - u_i^n}{\Delta t} = \frac{\alpha}{\Delta x^2} \left[\theta (u_{i-1}^n - 2u_i^n + u_{i+1}^n) + (1-\theta) (u_{i-1}^{n+1} - 2u_i^{n+1} + u_{i+1}^{n+1}) \right],$$

leads to the so-called theta-method:

$$u_i^{n+1} = u_i^n + r \left[\theta (u_{i-1}^n - 2u_i^n + u_{i+1}^n) + (1-\theta) (u_{i-1}^{n+1} - 2u_i^{n+1} + u_{i+1}^{n+1}) \right], \quad (3.27)$$

where $r = \frac{\alpha \Delta t}{\Delta x^2} = -\frac{m_{ii} \Delta t}{2} > 0$, $0 < i < N-1$ is the usual mesh ratio and $\theta \in [0,1]$. For $\theta = 0, \frac{1}{2}$, and 1 one obtains the implicit Euler, the Cranck-Nicolson and the explicit Euler (or, more concretely, the forward-time central-space, FTCS) schemes, respectively [59]. If $\theta > 0$, the theta-method is implicit. Now, in our shifted-hopscotch scheme, the neighbors are always taken into account at the same, latest time level, thus I insert $u_{i\pm 1}^m$ into (3.27) instead of $u_{i\pm 1}^n$ and $u_{i\pm 1}^{n+1}$, where $m = n, n + \frac{1}{2}$, or $n+1$ at the first, middle and last stages, respectively. Now, instead of (3.27) I can write

$$u_i^{n+1} = u_i^n - 2r\theta u_i^n - 2r(1-\theta)u_i^{n+1} + r(u_{i-1}^m + u_{i+1}^m), \quad (3.28)$$

i.e. my final formula reads as follows:

$$u_i^{n+1} = \frac{(1-2r\theta)u_i^n + r(u_{i-1}^m + u_{i+1}^m)}{1+2r(1-\theta)} \quad (3.29)$$

In the case of $\theta = 0$, this formula gives back the UPFD method [37], [38] with $m=n$, which takes the form for a half and a full time step, respectively:

$$u_i^{n+1} = \frac{u_i^n + r/2(u_{i-1}^m + u_{i+1}^m)}{1+r}, \quad u_i^{n+1} = \frac{u_i^n + r(u_{i-1}^m + u_{i+1}^m)}{1+2r} \quad (3.30)$$

The other formula I use is the constant neighbor (CNe) method, which is introduced in section 3.2.1 and now briefly restated here. The starting point is Eq. (3.24), where an approximation is made: when the new value of a variable u_i^{n+1} is calculated, I neglect the fact that the neighbors u_{i-1}^n and u_{i+1}^n are also changing during the time step. It means that the values of u_j ($j \neq i$) are considered as constants (that is why I call it constant-neighbor method). Taken into account the spatial discretization of heat equation in section 2.2 the general form of Equation (3.28) will be:

$$u_i^{n+1} = u_i^n - r_i \theta u_i^n - r_i (1-\theta) u_i^{n+1} + h \sum_{j \neq i} \frac{u_j^m}{C_i R_{ij}};$$

thus, the generalized theta-method for integer time steps reads as follows:

$$u_i^{n+1} = \frac{(1-r_i\theta)u_i^n + A_i}{1+r_i(1-\theta)} \quad (3.31)$$

Similarly, the generalized CNe formula is

$$u_i^{n+1} = u_i^n \cdot e^{-r_i} + \frac{A_i}{r_i} \left(1 - e^{-r_i}\right) \quad (3.32)$$

and of course, for halved time steps r_i and A_i must be divided by 2.

For the sake of brevity, I will use a compact notation of the individual combinations, where 5 data is given in a bracket, the numbers are the values of the parameter θ , while the letter ‘C’ is for the CNe constant neighbor method. For example $(\frac{1}{4}, \frac{1}{2}, C, \frac{1}{2}, \frac{3}{4})$ means the following 5-stage algorithm, which will be selected into the top 5 algorithm in section 3.3., and named as A2.

Example 1. Algorithm A2 $(\frac{1}{4}, \frac{1}{2}, C, \frac{1}{2}, \frac{3}{4})$, general from.

Stage 1. Take a half time step with the (3.31) formula with $\theta=\frac{1}{4}$ for odd cells:

$$u_i^{n+1} = \frac{\left(1 - \frac{r_i}{8}\right)u_i^n + A_{i,\text{half}}}{1 + \frac{r_i}{2}\left(1 - \frac{1}{4}\right)}, \quad A_{i,\text{half}} = \frac{\Delta t}{2} \sum_{j \neq i} \frac{u_j^m}{C_i R_{ij}}.$$

Stage 2. Take a full-time step with the (3.31) formula with $\theta=\frac{1}{2}$ for even cells:

$$u_i^{n+1} = \frac{\left(1 - \frac{r_i}{2}\right)u_i^n + A_i}{1 + r_i\left(1 - \frac{1}{2}\right)}, \quad A_i = \Delta t \sum_{j \neq i} \frac{u_j^m}{C_i R_{ij}}.$$

Stage 3. Take a full-time step with the (3.32) formula for odd cells:

$$u_i^{n+1} = u_i^n \cdot e^{-r_i} + \frac{A_i}{r_i} \left(1 - e^{-r_i}\right), \quad A_i = \Delta t \sum_{j \neq i} \frac{u_j^m}{C_i R_{ij}}.$$

Stage 4. The same as Stage 2.

Stage 1. Take a half time step with the (3.31) formula with $\theta=\frac{3}{4}$ for odd cells:

$$u_i^{n+1} = \frac{\left(1 - \frac{3}{8}r_i\right)u_i^n + A_{i,\text{half}}}{1 + \frac{r_i}{2}\left(1 - \frac{3}{4}\right)}, \quad A_{i,\text{half}} = \frac{\Delta t}{2} \sum_{j \neq i} \frac{u_j^m}{C_i R_{ij}}.$$

All other combinations can be constructed in this manner straightforwardly.

3.3.1. General definitions and circumstances of the examination

I examine 2-dimensional rectangle-structured lattices with $N = N_x \times N_z$ cells similar to what can be seen in Figure 3.2. I solve Eq. (2.20) subjected to randomly generated initial conditions $u_i(0) = \text{rand}$, where rand is a (pseudo)random number with a uniform distribution in the interval (0, 1), generated by the MATLAB for each cell. I also generate different random values for the heat capacities and for the thermal resistances.

I use zero Neumann boundary conditions, i.e., the system is thermally isolated. This is implemented naturally at the level of Eq. (2.19) since it is enough to omit those terms of the sum

which have infinite resistivity in the denominator due to the isolated border. This implies that the system matrix M has one zero eigenvalue, belongs to the uniform distribution of temperatures, all other eigenvalues must be negative.

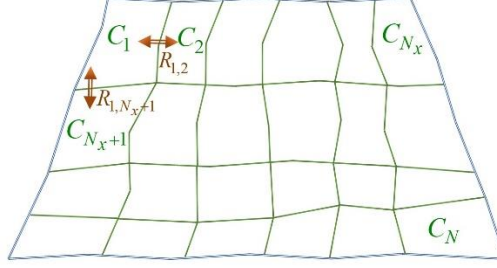


Figure 3.2. Arrangement of the generalized variables. The double-line red arrows symbolize conductive (heat) transport through the resistances R_{ij} . The blue line symbolizes thermal isolation at the boundaries of the system.

I calculate the numerical error by comparing our numerical solutions u_j^{num} with the reference solution u_j^{ref} at final time t_{fin} . In Subsection 3.3.5 the reference solution will be an analytical solution, otherwise it is a very accurate numerical solution which has been calculated by the ode15s built-in solver of MATLAB with very strict error tolerance. I use the following three types of (global) error. The first one is the maximum of the absolute differences:

$$\text{Error}(L_\infty) = \max_{0 \leq j \leq N} |u_j^{\text{ref}}(t_{\text{fin}}) - u_j^{\text{num}}(t_{\text{fin}})|. \quad (3.33)$$

The second one is the average absolute error:

$$\text{Error}(L_1) = \frac{1}{N} \sum_{0 \leq j \leq N} |u_j^{\text{ref}}(t_{\text{fin}}) - u_j^{\text{num}}(t_{\text{fin}})|. \quad (3.34)$$

The third one gives the error in terms of energy in case of the heat equation. It takes into account that an error of the solution in a cell with a large volume or heat capacity has more significance in practice than in a very small cell

$$\text{Error}(\text{Energy}) = \frac{1}{N} \sum_{0 \leq j \leq N} C_j |u_j^{\text{ref}}(t_{\text{fin}}) - u_j^{\text{num}}(t_{\text{fin}})|. \quad (3.35)$$

It is well known that the true solution always follows the maximum and minimum principles [59]. We say a method is positivity preserving if it never violates this principle, i.e., in our case no value of u is outside of the $[0,1]$ interval. I am interested in how these errors depend on the time step size in different concrete situations. As one can see in Figure 3.1C, there are 5-time steps (5 stages) altogether instead of 4 in the shifted hopscotch structure, so for the sake of honesty I must calculate the effective time step size as $\Delta t_{\text{EFF}} = \frac{4}{5} \Delta t$ and the errors will be plotted as a function of this quantity.

3.3.2. Preliminary tests

I apply the following 9 different values for parameter theta: $\theta \in \{0, \frac{1}{5}, \frac{1}{4}, \frac{1}{3}, \frac{1}{2}, \frac{2}{3}, \frac{3}{4}, \frac{4}{5}, 1\}$ in Eq. (3.31). It means that together with the CNe formula, I have 10 different formulas and I insert all of these into the shifted-hopscotch structure in all possible combinations. As there are 5 stages in the structure, I have $10^5=100000$ different algorithm combinations. The code

systematically constructs and tests all these combinations. After some tests, few best combinations choose and continue the work only with them. For this an automatic assessment of the performance of the combinations need. The difficulty lies in the fact that methods which are very inaccurate or even unstable for large time step sizes can be the most accurate for small time step sizes. Therefore, I choose two different final times $t_{\text{fin}} = 0.1, 10$, and calculate the solution with a large time step size (typically $t_{\text{fin}}/4$), then repeat the calculation for subsequently halved time step sizes until h reaches a small value (typically around 2×10^{-6}). I introduce aggregated relative error (ARE) quantities for each type of errors defined above, which can be calculated for the L_∞ error as follows:

$$\text{ARE}(L_\infty) = \frac{1}{R} \sum_{i=1}^R \left(\log(\text{Error}(L_\infty))_{\text{OEH}} - \log(\text{Error}(L_\infty))_{\text{shifted}} \right), \quad (3.36)$$

which means that $\text{ARE}(L_\infty)$ is the average of the difference between the error of the original OEH method and the actual shifted combination in terms of orders of magnitude. Then the code calculates the simple average of these errors:

$$\text{ARE} = \frac{1}{3} (\text{ARE}(L_\infty) + \text{ARE}(L_1) + \text{ARE}(\text{Energy})), \quad (3.37)$$

and finally sorts the 100000 combinations in descending order according to this quantity. In the obtained list usually positive ARE values have been assigned the first few thousands of combinations, the largest ones have been typically around 2, which means that some combinations are roughly two orders of magnitude more accurate than the original OEH method. I performed this procedure in case of 4 different small systems with $N_x \times N_z = 2 \times 2, 2 \times 6, 4 \times 4$, and 3×5 . The parameters $\alpha_C, \beta_C, \alpha_{R_x}, \beta_{R_x}, \alpha_{R_z}, \beta_{R_z}$ of the distribution of the mesh-cells data have been chosen to construct test problems with various stiffness ratios and $h_{\text{MAX}}^{\text{FTCS}}$, for example $\alpha_C = 1, 2$, or 3 , $\beta_C = 2, 4$, or 6 . I give the best 12 combinations in their short form:

$$\begin{aligned} & (0, 1/2, 1/2, 1/2, 1), \quad (1/2, 1/2, 1/2, 1/2, 1/2), \quad (0, C, 1/2, C, 1), \quad (0, C, C, C, 1), \\ & (3/4, 2/3, 1/2, 1/3, 1/4), \quad (1/4, 1/2, C, 1/2, 3/4), \quad (1/3, 2/3, C, 1/3, 2/3), \quad (C, 1/2, C, 1/2, C), \\ & (1/5, 1/2, 1/2, 1/2, 4/5), \quad (1/4, 1/2, 1/2, 1/2, 3/4), \quad (1/3, 1/2, 1/2, 1/2, 2/3), \quad (0, 1/2, 1/2, C, 1). \end{aligned} \quad (3.38)$$

Later preserves the positivity of the solution prove for formulas $\theta=1$ and CNe and therefore if only these two formulas are used in a combination, the whole algorithm will preserve positivity. Since this property is considered valuable [65-70], I repeated the above experiments for these $2^5=32$ combinations (instead of the 100000 above). I concluded that the (C, C, C, C, C) combination is the most accurate among these, therefore I further investigate 13 combinations altogether. I emphasize that these are the results of only preliminary (one might say tentative) tests, with the sole purpose of reducing the huge number of combinations into a manageable number, and I haven't stated anything exactly until this point.

3.3.3. Case study I and Comparison with other Solvers

I examine a grid similar to the one in Figure 3.2 with isolated boundary, but the sizes were fixed to $N_x = 100$ and $N_z = 100$, thus the total cell number was 10000, while the final time was $t_{\text{fin}} = 0.1$.

$$\alpha_C = 2, \beta_C = 4, \alpha_{R_x} = \alpha_{R_z} = 1, \beta_{R_x} = \beta_{R_z} = 2, \quad (3.39)$$

The exponents introduced above have been set to the following values which means that log-uniformly distributed values between 0.01 and 100 have been given to the capacities. The generated system can be characterized by its stiffness ratio and h_{MAX}^{FTCS} values, which are 3.1×10^7 and 7.3×10^{-4} , respectively. The performance of new algorithms was compared with the following widely used MATLAB solvers:

- ode15s, a first to fifth order (implicit) numerical differentiation formulas with variable-step and variable order (VSVO), developed for solving stiff problems;
- ode23s, a second order modified (implicit) Rosenbrock formula;
- ode23t, applies (implicit) trapezoidal rule with using free interpolant;
- ode23tb, combines backward differentiation formula and trapezoidal rule;
- ode45, a fourth/fifth order explicit Runge-Kutta-Dormand-Prince formula;
- ode23, second/third order explicit Runge-Kutta-Bogacki-Shampine method;
- ode113, 1 to 13 order VSVO Adams-Bashforth-Moulton numerical solver.

For all used MATLAB solvers, tolerances have been changed over many orders of magnitude, from the maximum value 'AbsTol' = 'RelTol' \doteq 'Tol' = 10^3 to the minimum value 'AbsTol' = 'RelTol' \doteq 'Tol' = 10^{-5} . I have plotted the L_∞ errors and energy errors as a function of the effective time step size Δt_{EFF} , and based on this, I selected the following top 5 combinations from those listed in (3.39) and after that:

S1 (C, C, C, C, C),

S2 (1/4, 1/2, C, 1/2, 3/4),

S3 (1/4, 1/2, 1/2, 1/2, 3/4),

S4 (0, 1/2, 1/2, 1/2, 1),

S5 (0, 1/2, 1/2, C, 1)

In Figures 3.3 and 3.4, I present the error functions only for these top 5 combinations, while in Figure 3.5 one can see the energy errors vs. the total running times. Furthermore, Table 3.1 presents some results which were obtained by our numerical schemes and the “ode” routines of MATLAB.

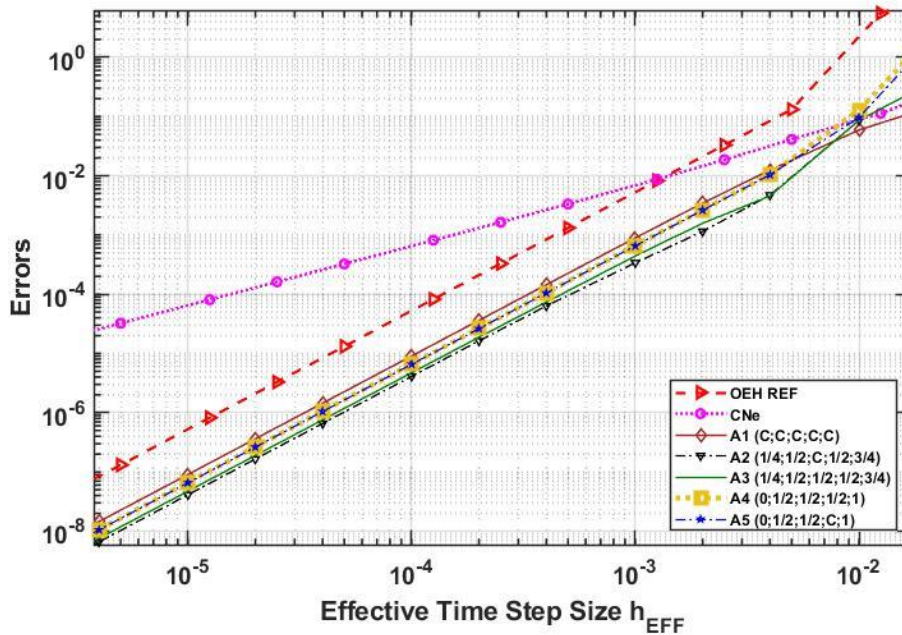


Figure 3.3. L_∞ errors as a function of the effective time step size for the first (moderately stiff) system, in the case of the original OEH method (OEH REF), the original one stage CNe method, the new algorithms A1-A5 and different MATLAB routines.

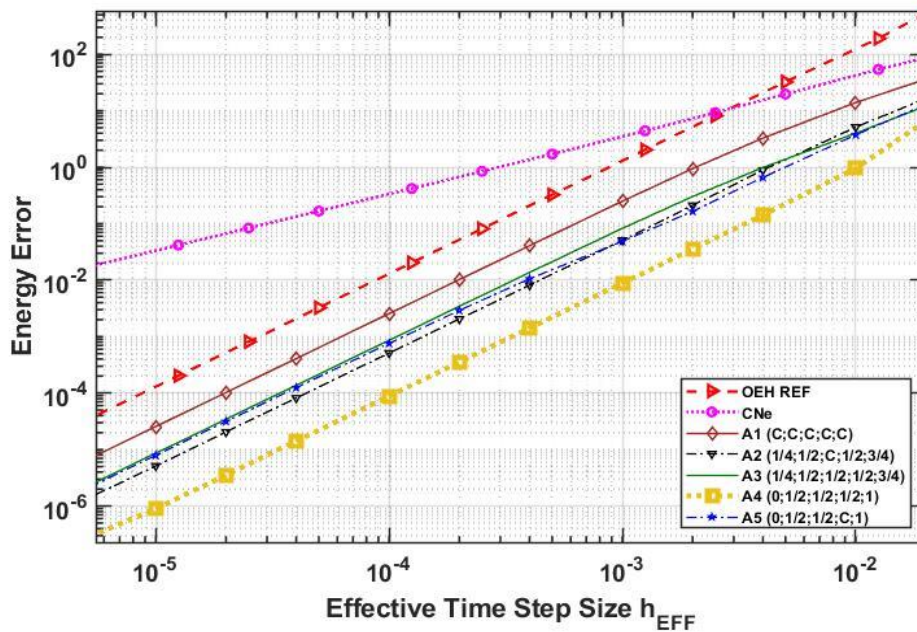


Figure 3.4. Energy errors as a function of the effective time step size for the first (moderately stiff) system, in the case of the original OEH method (OEH REF), one stage CNe method, the new algorithms A1-A5 and different MATLAB routines.

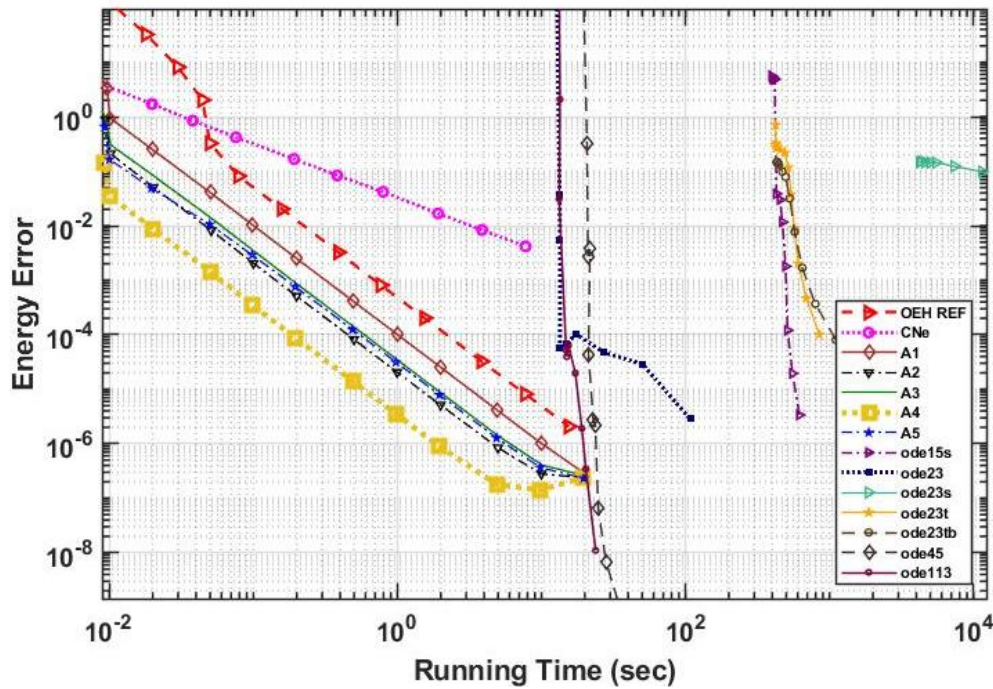


Figure 3.5. Energy errors as a function of the running time for the first (moderately stiff) system, in the case of the original OEH method (OEH REF), one stage CNe method, the new algorithms A1-A5 and different MATLAB routines.

Table 3.1. Comparison of different shifted hopscotch algorithms and MATLAB routines for the moderately stiff system of ten thousand cells.

Numerical Method	Running Time (sec)	Error(L_∞)	Error(L_1)	Energy Error
ode15s, Tol = 10^3	3.97×10^2	1.3×10^{-2}	1.1×10^{-3}	5.62×10^1
ode23s, Tol = 10^3	4.346×10^3	4.2×10^{-4}	3.0×10^{-5}	1.5×10^{-1}
ode23t, Tol = 10^{-8}	8.49×10^2	2.9×10^{-7}	2.0×10^{-8}	1.0×10^{-4}
ode23tb, Tol = 10^2	4.28×10^2	4.1×10^{-4}	2.9×10^{-5}	1.4×10^{-4}
ode45, Tol = 10^{-1}	2.1×10^1	3.3×10^{-3}	6.5×10^{-5}	2.7×10^{-3}
ode23, Tol = 10^{-6}	2.7×10^1	3.7×10^{-7}	9.6×10^{-9}	4.8×10^{-5}
ode113, Tol = 10^{-6}	1.91×10^1	6.7×10^{-7}	4.2×10^{-10}	1.9×10^{-6}
A1, $\Delta t = 1.25 \times 10^{-4}$	1.97×10^{-1}	9.06×10^{-6}	2.63×10^{-7}	2.56×10^{-3}
A2, $\Delta t = 1.25 \times 10^{-3}$	2.02×10^{-2}	3.39×10^{-4}	6.93×10^{-6}	5.08×10^{-2}
A3, $\Delta t = 2.5 \times 10^{-4}$	1.01×10^{-1}	1.88×10^{-5}	3.64×10^{-7}	3.44×10^{-3}
A4, $\Delta t = 5 \times 10^{-4}$	5.03×10^{-2}	1.06×10^{-4}	1.07×10^{-6}	1.42×10^{-3}
A5, $\Delta t = 2.5 \times 10^{-5}$	9.75×10^{-1}	2.62×10^{-7}	4.44×10^{-9}	3.15×10^{-5}

3.3.4. Case study II and Comparison with other Solvers

I tested our new algorithms and the conventional solvers for a harder problem as well. Thus, new values have been set for the α and β exponents:

$$\alpha_C = 3, \beta_C = 6, \alpha_{R_x} = 3, \alpha_{R_z} = 1, \beta_{R_x} = \beta_{R_z} = 4. \quad (3.40)$$

This means that the width of the distribution of the capacities and thermal resistances have been increased and the system has been acquired some anisotropy, since the resistances in the x direction are two orders of magnitude larger than in the z direction on average. With this modification I have gained a system with much higher stiffness ratio, 2.5×10^{11} , while the maximum allowed time step size for the standard FTCS was $h_{MAX}^{EE} = 1.6 \times 10^{-6}$. All other parameters and circumstances remained the same as in Subsection 3.3.3. In Figure 3.6 and 3.7 the L_∞ errors and energy errors have been presented as a function of the total running time.

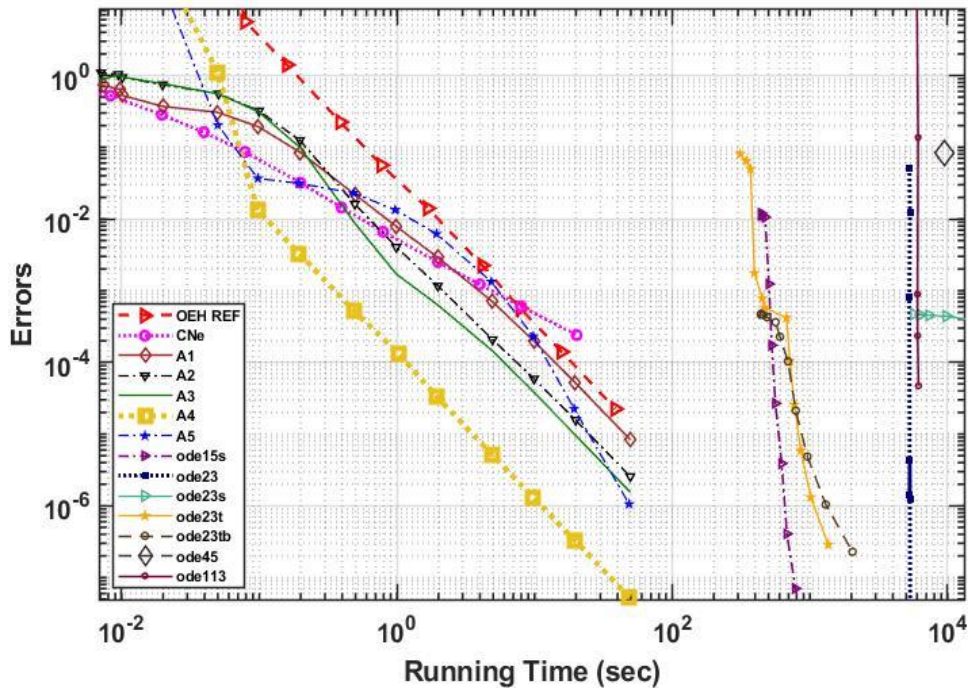


Figure 3.6. L_∞ errors as a function of the running time for the second (very stiff) system, in the case of the original OEH method (OEH REF), one stage CNe method, the new algorithms A1-A5 and different MATLAB routines.

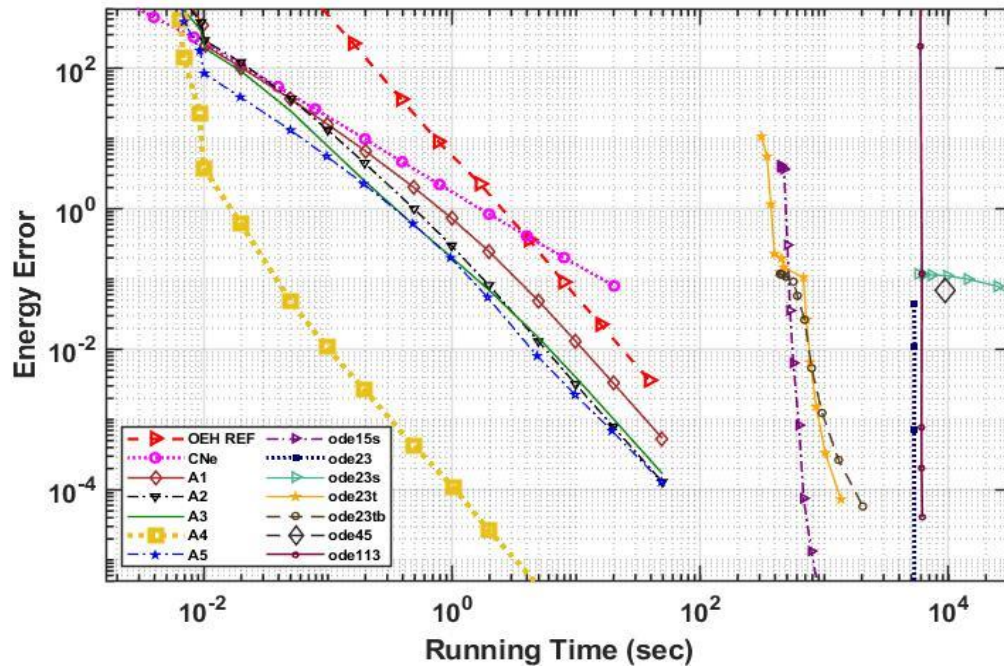


Figure 3.7. Energy errors as a function of the running time for the second (very stiff) system, in the case of the original OEH method (OEH REF), one stage CNe method, the new algorithms A1-A5 and different MATLAB routines.

Table 3.2. Comparison of different shifted hopscotch algorithms and MATLAB routines for the very stiff system of ten thousand cells.

Numerical Method	Running Time (sec)	Error(L_∞)	Error(L_1)	Energy Error
ode15s, Tol = 10^3	6.8×10^2	4.1×10^{-7}	1.5×10^{-8}	7.5×10^{-5}
ode23s, Tol = 10^3	5.694×10^3	4.7×10^{-4}	2.4×10^{-4}	1.2×10^{-1}
ode23t, Tol = 10^3	3.1×10^3	8.1×10^{-2}	2.1×10^{-3}	1.06×10^1
ode23tb, Tol = 10^3	2.037×10^3	2.3×10^{-7}	1.2×10^{-8}	5.8×10^{-5}
ode45, Tol = 10^3	9.480×10^3	8.1×10^{-2}	1.5×10^{-5}	7.0×10^{-2}
ode23, Tol = 10^3	5.317×10^3	1.2×10^{-6}	2.3×10^{-10}	1.1×10^{-6}
ode113, Tol = 10^3	6.046×10^3	8.9×10^{-4}	1.7×10^{-7}	7.7×10^{-4}
A1, $\Delta t = 1.25 \times 10^{-4}$	1.98×10^{-1}	8.46×10^{-2}	4.55×10^{-4}	6.72×10^0
A2, $\Delta t = 5.0 \times 10^{-6}$	4.17×10^0	4.81×10^{-4}	3.69×10^{-6}	6.65×10^{-2}
A3, $\Delta t = 2.5 \times 10^{-6}$	9.85×10^0	1.99×10^{-4}	7.65×10^{-7}	1.31×10^{-2}
A4, $\Delta t = 1.25 \times 10^{-4}$	1.95×10^{-1}	3.28×10^{-3}	8.88×10^{-6}	2.68×10^{-3}
A5, $\Delta t = 5 \times 10^{-7}$	4.95×10^1	1.55×10^{-6}	8.71×10^{-9}	1.69×10^{-4}

3.3.5. Verification by comparison to analytical results

I consider very recent nontrivial analytical solutions of Eq. (3.23) found by Barna and Mátyás [4] by a similarity transformation technique. Both of them are given on the whole real number line for positive values of t as follows

$$u_1^{exact}(x, t) = \frac{x}{t^{3/2}} e^{-\frac{x^2}{4\alpha t}} \quad (3.41)$$

and

$$u_2^{exact} = \frac{x}{t^{5/2}} \left(1 - \frac{x^2}{6\alpha t} \right) e^{-\frac{x^2}{4\alpha t}} \quad (3.42)$$

I reproduce these solutions only in finite space and time intervals $x \in [x_1, x_2]$ and $t \in [t_0, t_{\text{fin}}]$, where $x_1 = -5$, $x_2 = 5$, $t_0 = 0.5$, $t_{\text{fin}} = 1$. The space interval is discretized by creating nodes as follows: $x_j = x_1 + j\Delta x$, $j = 0, \dots, 1000$, $\Delta x = 0.01$. I prescribe the appropriate Dirichlet boundary conditions at the two ends of the interval:

$$u_1(x = x_b, t) = \frac{x_b}{t^{3/2}} e^{-\frac{x_b^2}{4\alpha t}} \quad (3.43)$$

and

$$u_2(x = x_b, t) = \frac{x_b}{t^{5/2}} \left(1 - \frac{x_b^2}{6\alpha t} \right) e^{-\frac{x_b^2}{4\alpha t}} \quad (3.44)$$

where $x_b \in \{x_1, x_2\}$. I obtained that the new methods are convergent and the order of convergence is two. In Figure 3.8 the L_∞ errors as a function of the effective time step size h_{EFF} are presented for the case of the u_2 solution for the top 5 algorithms and a first-order “reference-curve” for the original CNe method. I note that very similar curves have been obtained for the u_1 solution, as well as for other space and time intervals.

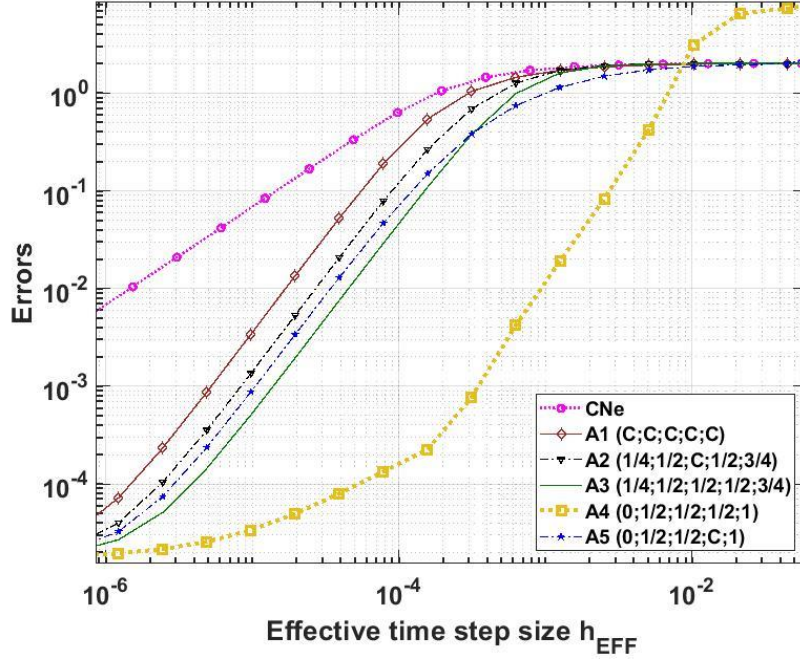


Figure 3.8. The L_∞ errors as a function of Δt_{EFF} for the u_2 solutions.

3.4. The Optimization of Leapfrog -Hopscotch Method Combinations

In a manner similar to the Shifted-Hopscotch method, the hopscotch space structure was combined with leapfrog time integration. Using the theta method with nine different values of θ , along with the recently invented CNe method. 10^5 combinations constructed. Via subsequent numerical experiments, this huge number was decreased by excluding the combinations that underperformed and, finally, only the top five of these were retained. two two-dimensional used stiff systems containing 10,000 cells with completely discontinuous random parameters and initial conditions, and presented the results of these five algorithms.

The best algorithms compared with other methods for a large, moderately stiff system with the same procedure of 3.3.3, and for a large, very stiff system with the same procedure of 3.3.4. for the same system size and final time. The following top 5 combinations are chosen based on the best performance of the maximum and energy error.

$$\text{L1 (C, C, C, C, C),}$$

$$\text{L2 (0, } \frac{1}{2}, \frac{1}{2}, \frac{1}{2}, \frac{1}{2}),}$$

$$\text{L3 (} \frac{1}{5}, \frac{1}{2}, \frac{1}{2}, \frac{1}{2}, \frac{1}{2}),}$$

$$\text{L4 (} \frac{1}{4}, \frac{1}{2}, \text{C, } \frac{1}{2}, \frac{1}{2}),}$$

$$\text{L5 (} \frac{1}{5}, \frac{1}{2}, \text{C, } \frac{1}{2}, \frac{1}{2}).}$$

3.4.1. Verification Comparison to analytical results using a non-uniform mesh

The nontrivial analytical solution [4] in section 3.3.5 of Eq. (3.23) is used here, given on the whole real number line for positive values of t as in Eq. (3.42), where the value $\alpha = 1$ is used, this solution was reproduced by prescribing the Dirichlet boundary conditions calculated using the analytical solution at the two ends of the interval. Now this kind of information is not use,

but construct a large-scale non-equidistant spatial grid according to the following procedure. First the coordinates of the cell borders define by the formula

$$x_j = x_{j-1} + \Delta x_{j-1}, \quad x_0 = 0, \quad \Delta x_0 = 0.01, \quad \Delta x_j = \Delta x_0 \exp(\gamma j^4), \quad j = 1, \dots, 1000.$$

where $\gamma = 10^{-11}$. Thus I have a quite dense system of nodes close to the origin which becomes less and less dense as one is getting further from the origin, towards +5922.3, which is the right boundary of the mesh. Then the cell-centers are calculated straightforwardly:

$$X_j = X_{j-1} + \frac{\Delta x_j}{2}, \quad X_0 = 0, \quad j = 1, \dots, 1000.$$

Now it is straightforward to reflect this structure to the origin to create the mirror image of the mesh at the negative side of the x axis obtaining 2000 cells altogether. Now at the vicinity of the origin a diameter 0.01 for small cells, which are increasing as it is getting further from the origin, first very slowly, then more and more rapidly until it reaches $\Delta x_{\pm 1000} = 211.6$. The resistances and the cell capacities then can be calculated as:

$$C_i = \Delta x_i, \quad i = 1, \dots, 2000 \quad \text{and} \quad R_i = X_{i+1} - X_i, \quad i = 1, \dots, 1999$$

zero Neumann boundary conditions taken into account which is a good approximation because the values of the initial function are very close to zero far from the origin. The stiffness ratio is 5.7×10^{11} for this mesh, while $\Delta t_{\text{MAX}}^{\text{FTCS}} = 5 \times 10^{-5}$. As in shifted hopscotch, the analytical solution reproduce in finite time interval $t \in [t_0, t_{\text{fin}}]$, where $t_0 = 0.5, t_{\text{fin}} = 1$. In Figure 3.9 the L_∞ errors as a function of the time step size Δt are presented for the case of the u solution for the top 5 leapfrog-hopscotch algorithms, a first-order “reference-curve” for the original CNe method and the Heun method. These result verify not only the second order convergence of the numerical methods, but the procedure of generalizing the calculations to non-uniform grids. One can also see that the L2 and L3 algorithms reach the minimum error (determined by the space discretization) for larger Δt than the CFL limit for the Heun method.

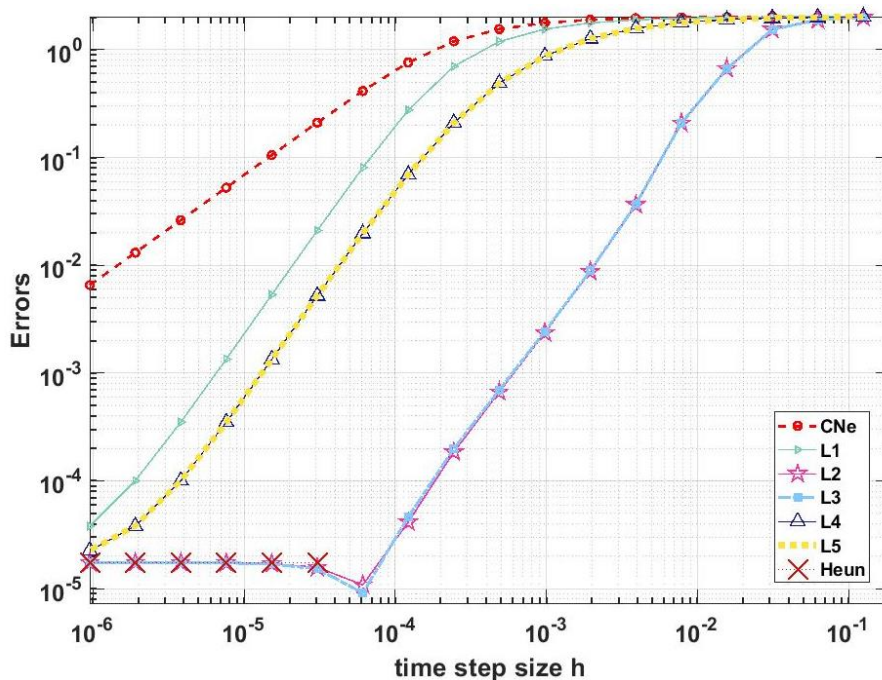


Figure 3.9. The L_∞ errors as a function of time step size h for the space-dependent mesh to reproduce the exact solution given in (3.42).

3.5. The Optimization of Pseudo-Implicit Method Combinations

By the iteration of the theta-formula and treating the neighbors explicitly, a new 2-stage explicit algorithm was constructed to solve partial differential equations containing a diffusion term and two reaction terms. One of the reaction terms is linear, which may describe heat convection, the other one is proportional to the fourth power of the variable, which can represent radiation. analytically prove for the linear case that the order of accuracy of the method is two and that it is unconditionally stable. The diffusion-reaction equation (2.20) is going to be studied.

Algorithm 1, UPDF for the diffusion-reaction-radiation equation

$$u_i^{n+1} = \frac{u_i^n + r(u_{i-1}^n + u_{i+1}^n) + q_i \Delta t}{1 + 2r + K_i \Delta t + \sigma \Delta t (u_i^n)^3}. \quad (3.45)$$

It is easy to see that this formula preserves positivity similarly to the original UPFD formula for arbitrary nonnegative values of r, q_i, K_i and σ , thus for the strongly nonlinear case as well. Its accuracy is not very good, thus a two-stage method proceed to construct as well.

the UPFD idea with the so called θ -method going to combine, which can be applied for the diffusion term in the following way:

$$u_i^{n+1} = u_i^n + r \left[\theta (u_{i-1}^n - 2u_i^n + u_{i+1}^n) + (1-\theta) (u_{i-1}^{n+1} - 2u_i^{n+1} + u_{i+1}^{n+1}) \right], \quad (3.46)$$

Where $\theta \in [0,1]$. If $\theta=1$, this scheme is the forward-time central-space (FTCS) scheme, which is basically the explicit Euler time integration. For smaller values of θ , this formula is implicit, and for $\theta=0, \frac{1}{2}$ one has the implicit (Euler) and the Crank-Nicolson method, respectively [61]. Using the trick above and incorporating the reaction and the source terms I can write:

$$u_i^{n+1} = u_i^n + r \left[-2\theta u_i^n - 2(1-\theta)u_i^{n+1} + u_{i-1}^n + u_{i+1}^n \right] - \Delta t K_i u_i^{n+1} + \Delta t q_i + \sigma u_i^{n+1} (u_i^n)^3. \quad (3.47)$$

If one takes $\theta=0$, the original UPFD treatment is obtained back. The point is that this more general formula can also be easily rearranged to obtain an explicit formula, according to which the new value of the u variable has the following form in the 1D equidistant case:

Algorithm 2, theta-generalization of Algorithm 2

$$u_i^{n+1} = \frac{(1-2r\theta)u_i^n + r(u_{i-1}^n + u_{i+1}^n) + \Delta t q_i}{1 + 2r(1-\theta) + \Delta t K_i + \sigma \Delta t (u_i^n)^3}. \quad (3.48)$$

Since started from an implicit formula (3.46) formally but made it fully explicit, these methods started to be called *pseudo-implicit*. The main novelty of this study is that formula (3.48) is organized into a two-stage method as follows. The calculation starts with taking a fractional-sized time step using the already known u_i^n values, and then a full-time step is made.

Algorithm 3, 2-stage pseudo-implicit method for the diffusion-reaction-radiation equation

Stage 1. Take a partial time step $\Delta t_1 = p\Delta t$, $p > 0$ using formula (3.49) with parameter θ_1 :

$$u_i^{\text{pred}} = \frac{(1-2pr\theta_1)u_i^n + pr(u_{i-1}^n + u_{i+1}^n) + q_i\Delta t_1 - v_1K_i\Delta t_1u_i^n}{1+2pr(1-\theta_1) + v_2K_i\Delta t_1 + \sigma\Delta t_1(u_i^n)^3}.$$

Stage 2. u_i^{pred} redefine by calculating the linear combination with $0 < \lambda \leq 1$:

$$u_i^{\text{pred}} = \lambda u_i^{\text{pred}} + (1-\lambda)u_i^n. \quad (3.49)$$

Take a full time step with the (3.48) formula with parameter θ_2 :

$$u_i^{n+1} = \frac{(1-2r\theta_2)u_i^n + r(u_{i-1}^{\text{pred}} + u_{i+1}^{\text{pred}}) + q_i\Delta t - K_i\Delta t(w_1u_i^n + w_2u_i^{\text{pred}})}{1+2r(1-\theta_2) + (1-w_1-w_2)K_i\Delta t + \sigma\Delta t(u_i^{\text{pred}})^2u_i^n}, \quad (3.50)$$

Where v_1, v_2, w_1, w_2 are real numbers which are considered as free parameters. The mathematically correct form of (3.49) would be $u_i^{\text{lin}} = \lambda u_i^{\text{pred}} + (1-\lambda)u_i^n$, but it immediately put down in the form which is to be used in a computer code to spare memory. also note that with this treatment of the nonlinear term a second-order method obtain with very good stability properties.

Algorithm 4: (Algorithm 4) for the diffusion-reaction-radiation equation

Stage 1. Take a partial time step $\Delta t_1 = \frac{\Delta t}{2\lambda}, \lambda > 0$:

$$u_i^{\text{pred}} = \frac{\left(1+r\left(1-\frac{1}{\lambda}\right)\right)u_i^n + r/2\lambda(u_{i-1}^n + u_{i+1}^n) + q_i\Delta t_1}{1+r + K_i\Delta t_1 + \sigma\Delta t_1(u_i^n)^3}. \quad (3.51)$$

Stage 2. Calculate the linear combination $u_i^{\text{pred}} = \lambda u_i^{\text{pred}} + (1-\lambda)u_i^n$

Take a full-time step:

$$u_i^{n+1} = \frac{(1-r)u_i^n + r(u_{i-1}^{\text{pred}} + u_{i+1}^{\text{pred}}) + q_i\Delta t + K_i\Delta t(u_i^{\text{pred}} - u_i^n)}{1+r + K_i\Delta t + \sigma\Delta t(u_i^{\text{pred}})^2u_i^n}. \quad (3.52)$$

3.5.1. Verification using an analytical solution

The following analytical solution constructed of Eq. (2.20) for $\alpha=1, K=2$ and $q(x,t) = \sigma t^4 e^{4x-4t} + e^{x-t}$:

$$u^{\text{exact}}(x,t) = te^{x-t}. \quad (3.53)$$

Here this analytical solution numerically reproduce for $(t,x) \in [0.5, 1] \times [-1, 1]$ and $\sigma=3$. The initial condition

$$u(x,t=0.5) = 0.5e^{x-0.5},$$

and the Dirichlet boundary conditions at the ends of the interval

$$u(x=-1, t) = te^{-1-t}, \quad \text{and} \quad u(x=1, t) = te^{1-t}$$

are obtained using the analytical solution. The (global) numerical error is the absolute difference of the numerical solutions u_j^{num} produced by the examined method and the reference solution u_j^{ref} (which is the analytical solution here) at final time t_{fin} . I use these individual errors of the nodes or cells to calculate the maximum error:

$$\text{Error}(L_\infty) = \max_{1 \leq j \leq N} |u_j^{\text{ref}}(t_{\text{fin}}) - u_j^{\text{num}}(t_{\text{fin}})|. \quad (3.54)$$

The L_∞ errors as a function of the time step size Δt can be seen in Figure 3.10 for $\Delta x = 0.02$.

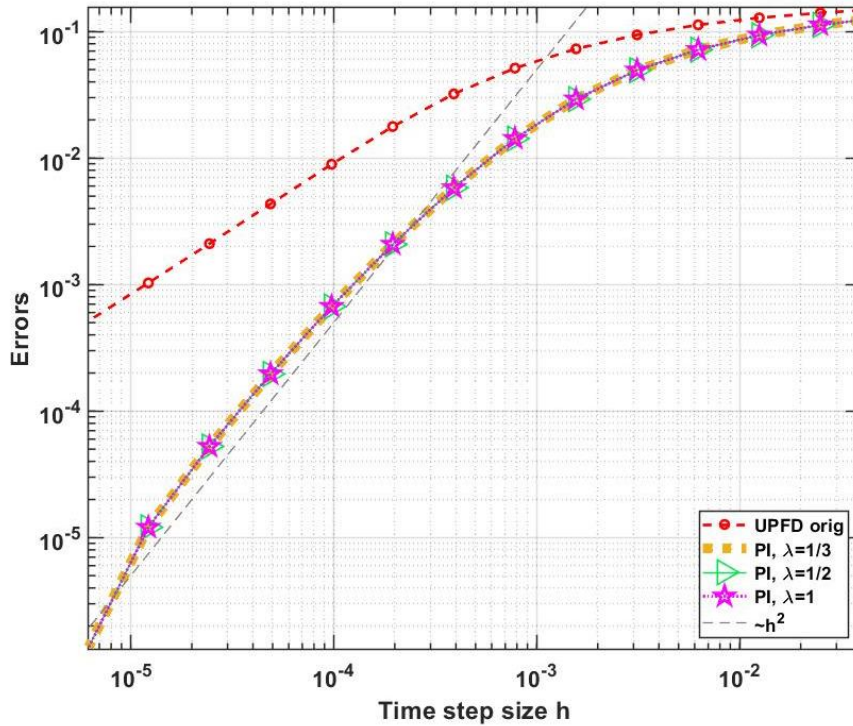


Figure 3.10. The L_∞ for the numerical solutions of the diffusion-reaction-radiation equation in the case of Algorithm 1 and the new pseudo-implicit Algorithm 3 for three different values of parameter λ .

4. USING EFFICIENT METHODS TO SOLVE REAL-LIFE HEAT TRANSFER PROBLEMS

In the previous sections, the algorithms tested under general circumstances using discontinuous random parameters and initial conditions. I have shown that they can provide quite accurate results and are much faster than the professionally optimized MATLAB ‘ode’ routines. In this section, I perform systematic tests in the building walls by varying some parameters of the system and the mesh to examine how the performance of the individual methods changes and which of them is the best choice under different circumstances.

4.1. Calculate The Heat Conduction in an Insulated Wall

Calculating heat transfer in building components is an important and nontrivial task. Thus, in this current work, 13 numerical methods extensively examined to solve the linear heat conduction equation in building walls. Eight of the used methods are recently invented explicit algorithms that are unconditionally stable.

4.1.1. The Geometry and Mesh Generation:

As one can see in Figure 4.1, a one-layer wall consisting of brick only and two-layer walls consisting of brick and glass wool insulator considered.

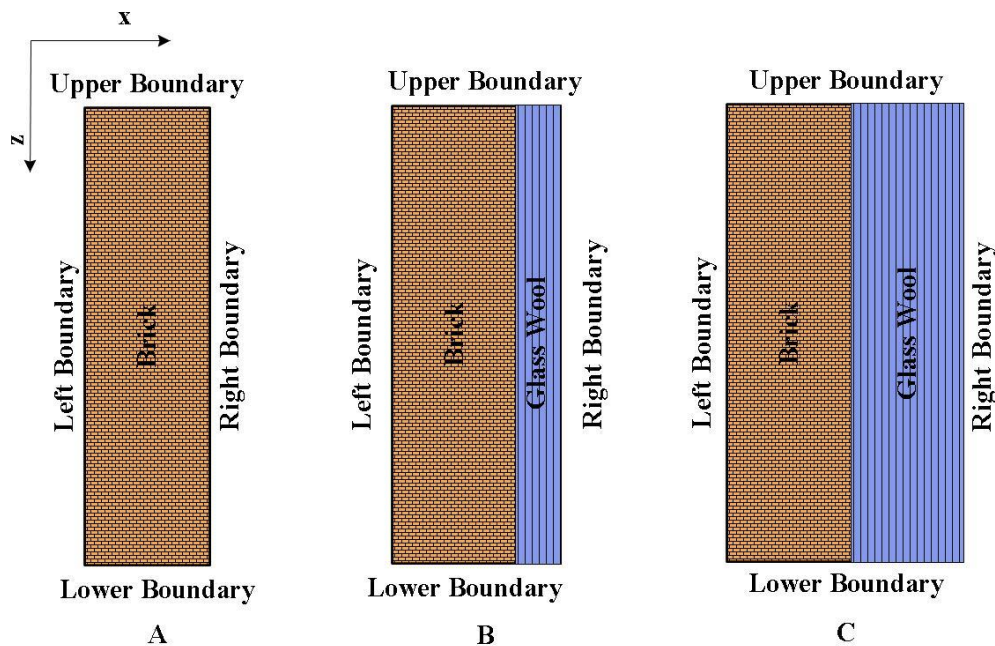


Figure 4.1. (A) One-layer wall, (B) and (C) wall with insulator.

A piece of wall with volume $1\text{ m} \times 1\text{ m} \times 1\text{ m}$ considered. However, no physical quantities are changing in the y -direction (perpendicular to the surface of Figures 4.1 and 4.2), thus that dimension is irrelevant. It means I deal only with a cross-section, which is a two-dimensional problem from the mathematical point of view and thus $\Delta y_i = 1$ can use. So, several meshes of size 1 m^2 constructed, which means $(x, z) \in [0, 1] \times [0, 1]$. The shape of the cells is square in the equidistant mesh and rectangular in the non-equidistant meshes. The heat capacity of the cells

can be given as $C_i = c_i \rho_i \Delta x_i \Delta z_i$, while the thermal resistance in the x -direction has the approximate formula $Rx_i \approx \frac{\Delta x_i}{k_i Ax_i}$, where Ax_i is the surface element perpendicular to x . Since now it can be given as $Ax_i = \Delta y_i \Delta z_i = \Delta z_i$, the horizontal and vertical resistances can be given in case of a homogeneous material and uniform mesh as

$$Rx_i \approx \frac{\Delta x_i}{k_i \Delta z_i} \text{ and } Rz_i \approx \frac{\Delta z_i}{k_i \Delta x_i},$$

respectively. If the material properties or the sizes of the two neighboring cells are different, for the resistance between cells i and $i + 1$ one can write

$$Rx_i \approx \frac{\Delta x_i}{2k_i \Delta z_i} + \frac{\Delta x_{i+1}}{2k_{i+1} \Delta z_{i+1}},$$

and if the cell j is below the cell i , I have

$$Rz_i \approx \frac{\Delta z_i}{2k_i \Delta x_i} + \frac{\Delta z_j}{2k_j \Delta x_j}$$

for the vertical resistance.

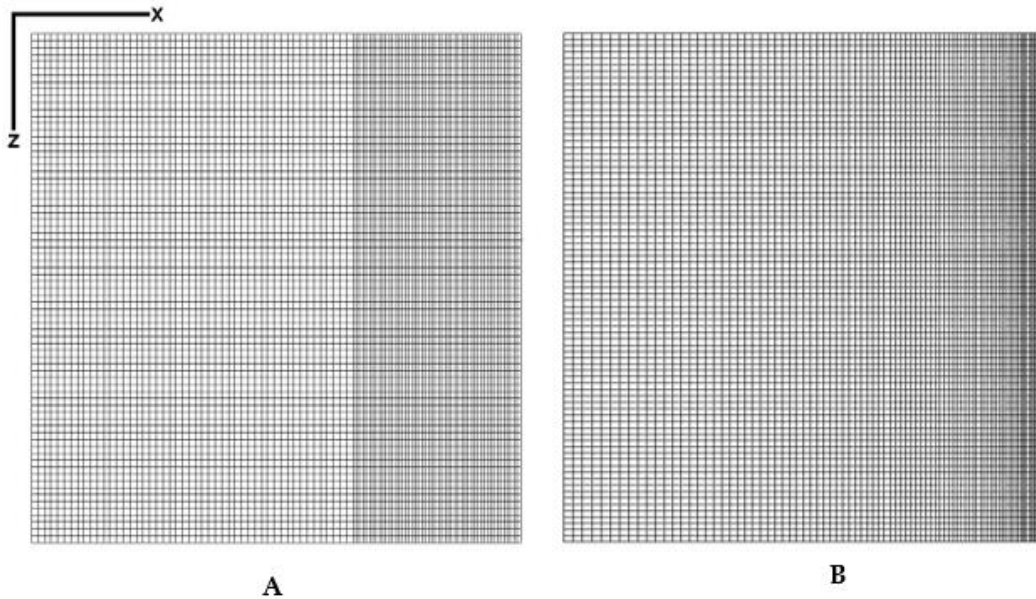


Figure 4.2. (A) Abrupt change. (B) Gradual change in the x direction.

An equidistant grid and non-equidistant grids apply to discretize the space variables in both the one layer and the multilayer cases. The cell number along axis x is set to $N_x = 100$. Similarly, the cell number along axis z is $N_z = 100$, except in Section 4.1.3.2 where $N_x = N_z = 80$. Thus, I have a grid with a total cell number $N = N_x N_z = 10000$ (and $N = 6400$ in Section 4.1.3.2). It should note that the temperature in the middle of the cell was considered the temperature of the cell. However, Dirichlet boundary conditions use to reproduce an analytical solution, therefore the boundary of the system should be in the middle of the cells belonging to the boundary. This issue is solved by increasing the size of the cells, so in the case of an equidistant grid and $N_x = N_z = 100$, and $\Delta x = \Delta z = 0.0101$ instead of just 0.01.

In case of non equidistance I consider a wide cells on the left side of the wall and small ones on the right side of the wall. This is implemented in two different ways. In case of abrupt change, an equidistant coarse mesh $\Delta x = 0.0105$ at the left 50% of the cells, and an equidistant fine mesh $\Delta x = 0.0097$ at the right side used.

For a gradual change, the width of the cells were decreased as a geometric series as follows. For $r \neq 1$, the sum of the first $n + 1$ terms of a geometric series, up to and including the r^n term, is

$$a + a\gamma + a\gamma^2 + a\gamma^3 + \dots + a\gamma^n = \sum_{k=0}^n a\gamma^k = a \left(\frac{1 - \gamma^{n+1}}{1 - \gamma} \right)$$

The $\gamma = 0.98$, $n = N_x - 1$, and $a = 0.0234$ used. This means that on the left side $\Delta x_1 = 0.0234$ and it is gradually decreased to $\Delta x_{N_x} = 0.98^{99} \cdot \Delta x_1 = 0.00317$. The same abrupt and gradual change can be implemented in the z -direction.

In the multilayer case, the left 50% of the cells were always brick and the right 50% were insulator. It implies that, if the mesh is equidistant, the volume of the brick and the insulator is the same as in Figure 4.1.C. However, if abrupt or gradual change in the x -direction, the thickness of the insulator is smaller, similar to the case in Figure 4.1.B.

I always use equidistant temporal discretization with time step size Δt , and u_i^n denotes the temperature of cell i at time moment $n\Delta t$.

4.1.2. The Materials, and Boundary Conditions:

In the present work, real material properties are listed in Table 4.1.

Table 4.1. The properties of the materials used.

	ρ (kg · m ⁻³)	k (W · m ⁻¹ · K ⁻¹)	c (J · kg ⁻¹ · K ⁻¹)
Brick	1600	0.73	800
Glass wool	200	0.03	800

Different initial and boundary conditions are applied for both the one-layer and the multilayer cases as follows:

I. Sinusoidal initial condition with zero Dirichlet boundary condition.

The initial condition is the product of two sine functions:

$$u(x, z, t = 0) = \sin(\pi x) \sin(\pi z) . \tag{4.1}$$

The simplest zero Dirichlet boundary conditions are used:

$$u(x = 0, z, t) = u(x = 1, z, t) = u(x, z = 0, t) = u(x, z = 1, t) = 0 . \tag{4.2}$$

Anyone can easily check that the analytical solution to this problem is

$$u(x, z, t) = \sin(\pi x) \sin(\pi y) e^{-2\pi^2 t} , \tag{4.3}$$

valid only in homogeneous material, i.e., in a one-layer wall.

II. Linear initial condition with combined boundary conditions.

The initial condition is a linear function of the z variable:

$$u(x, z, t = 0) = 30 - 15z .$$

Neumann boundary condition at the top and bottom of the wall, meaning thermal isolation:

$$u_z(x, z = 0, t) = u_z(x, z = 1, t) = 0 .$$

The space-dependent temperature at the left boundary:

$$u(x = 0, z, t) = 30 - 15z .$$

The time-dependent temperature at the right boundary:

$$u(x = 1, z, t) = u(x = 1, z = 0, t = 0) \cdot e^{\lambda t} ,$$

where $\lambda = 0.00004$. The final time was 10,000, which means that the temperature at the right boundary is gradually increased from 30°C to 44.75°C .

I note that in case II, I chose such complicated boundary conditions to demonstrate that the methods perform well even in these cases.

4.1.3. The Simulation Results

I have used Heun's method as a reference solution to calculate the maximum error and energy error with an extremely small-time step size $\Delta t = 0.002$. I have chosen Heun's method for reference because this is the most widely tested algorithm among the examined methods.

4.1.3.1. Verification Using the Analytical Solution

I simulated a one-layer brick wall (see Figure 4.1.A). As it is written in point I. above, I applied sinusoidal initial temperature distribution Eq.(4.1) and zero Dirichlet boundary condition (4.2) using the analytical solution Eq.(4.3) at $t_{\text{fin}} = 10000$ (s). I made the simulations in all the possible six cases, which are the following:

- (a) Equidistant mesh.
- (b) Abrupt change in the x -direction, equidistant mesh in the z -direction.
- (c) Abrupt change in both x and z directions.
- (d) Gradual changing in the x -direction, equidistant mesh in the z -direction.
- (e) Gradual changing in both x and z directions.
- (f) Abrupt change in x -direction, gradual changing in z -direction.

The obtained results are very similar for all the cases and the residual error (the error for very small time step sizes due to space discretization) is below 10^{-4} . This means that the codes for equidistant and non-equidistant meshes are successfully verified. In Figures 4.3 and 4.4, the errors as a function of the time step sizes are presented in log-log diagrams for cases (a) and (f), respectively. One can see that the UPFD and the CNe methods are first order while the others are second order in the time step size, as is expected. Note that the hopscotch algorithms, especially the original OOEH, are more accurate than the other algorithms. The Heun's method is quite accurate once I am below the CFL limit, but above this limit it produces no meaningful results. In Figures 4.5 and 4.6, the errors as a function of the running times are presented for the same

cases. To reduce the effect of the fluctuations in running time measurements, I averaged out the running times of five different runs. As I expected, the differences of the running times for a fixed time step size are mostly caused by the different number of stages, e.g. the LNe3 method consists of three stages and therefore its curve is shifted slightly to the right relative to all other methods in Figures 4.5 and 4.6.

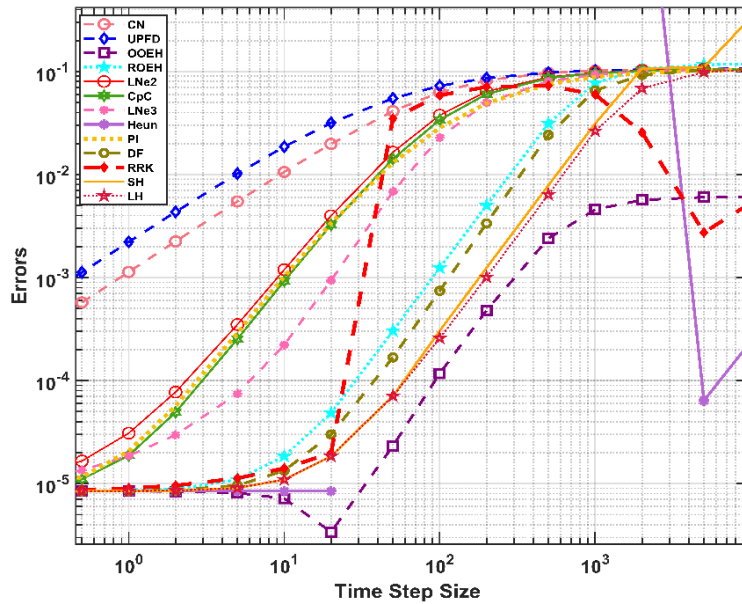


Figure 4.3. The maximum errors as a function of the time step size Δt for the 13 examined methods in the case of an equidistant mesh.

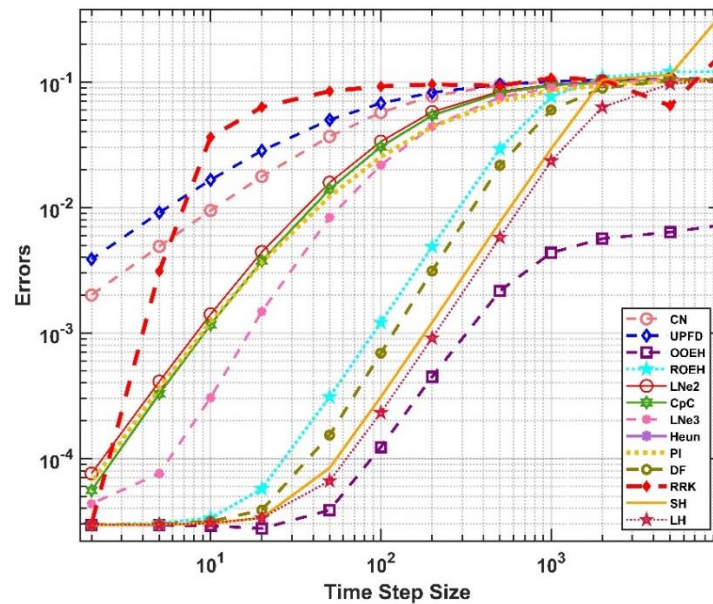


Figure 4.4. The maximum errors as a function of the time step size Δt for the abrupt change in the x -direction and gradual change in the z -direction.

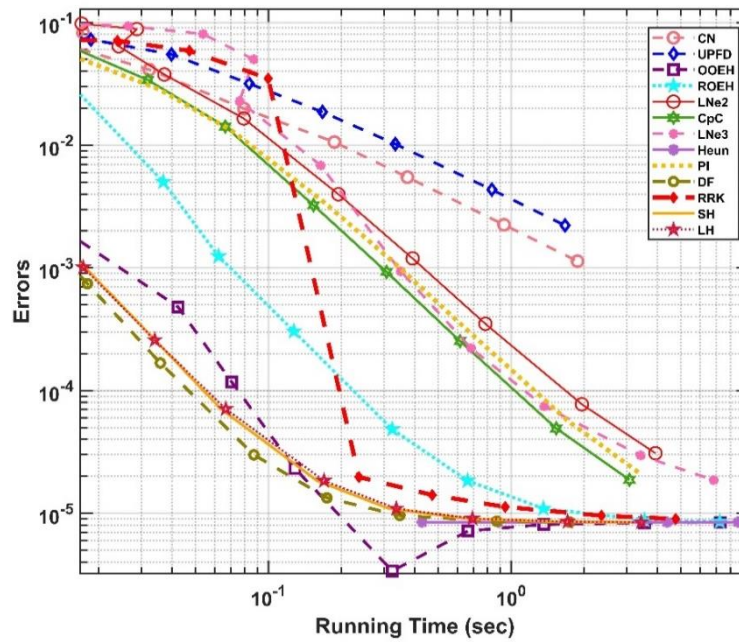


Figure 4.5. The maximum errors as a function of the running time for the 13 examined methods in the case of an equidistant mesh.

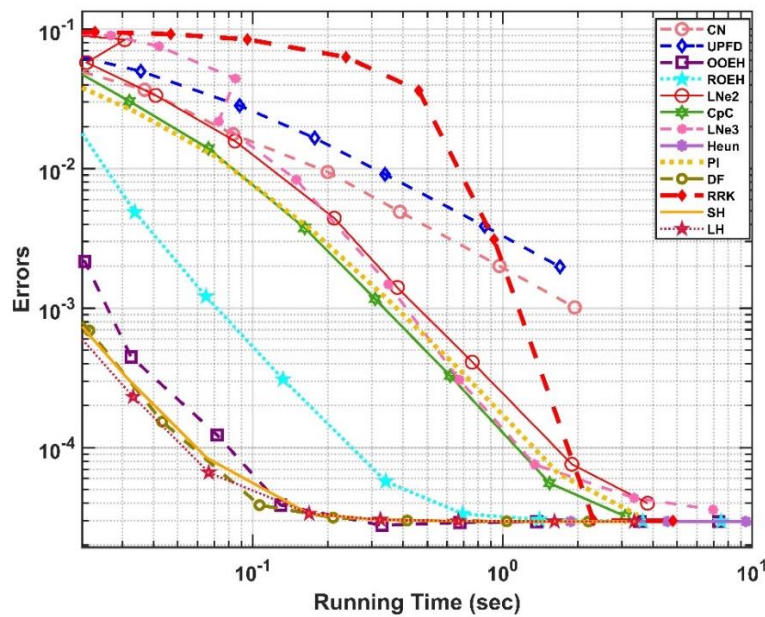


Figure 4.6. The maximum errors as a function of the running time for the abrupt change in the x -direction and gradual change in the z -direction.

4.1.3.2. Realistic Case with Nontrivial Boundary Conditions

In this subsection, the initial condition is a linear function of space, while the boundary conditions are complicated as it is written in point II. The Neumann boundary conditions for upper and lower boundaries are implemented by setting the appropriate resistances to infinity, implying that the matrix elements describing heat transfer through the boundary vanish. First, I perform the simulation for the one-layer wall for two different grids (equidistant and gradual change in both directions), and only then for the insulated wall.

In Figure 4.7, I present the maximum errors for a multi-layer wall with an equidistant mesh. For the non-equidistant mesh, the maximum errors and the energy errors are presented in Figures 4.8 and 4.9, respectively. From the figures, it is evident that the LH method can easily cope with this complicated heat-conduction problem as well.

Figure 4.10 presents the final temperature contours in the case of simple wall and insulated wall, while the right-side temperature profile at medium height can be seen in Figure 4.11. One can also observe that the heat from the outer side of the insulator penetrates more slowly into the wall in the case of the insulated wall.

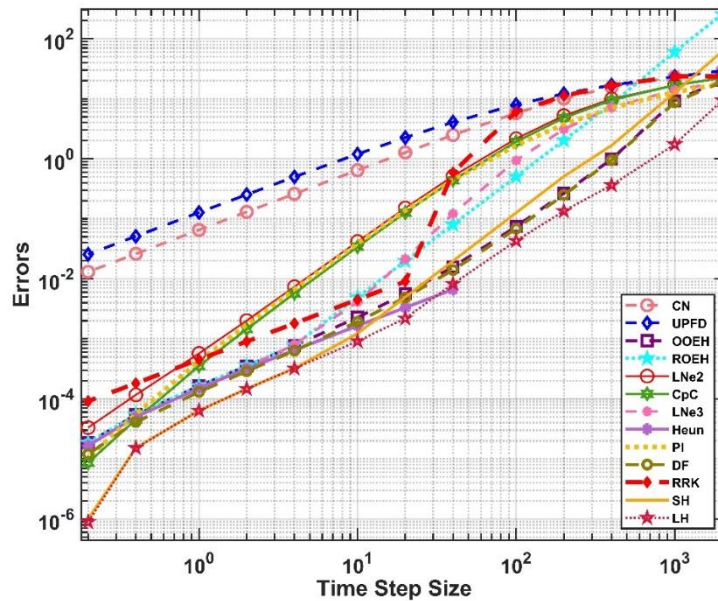


Figure 4.7. The maximum errors as a function of the time step size Δt for the equidistant mesh for a wall with insulation.

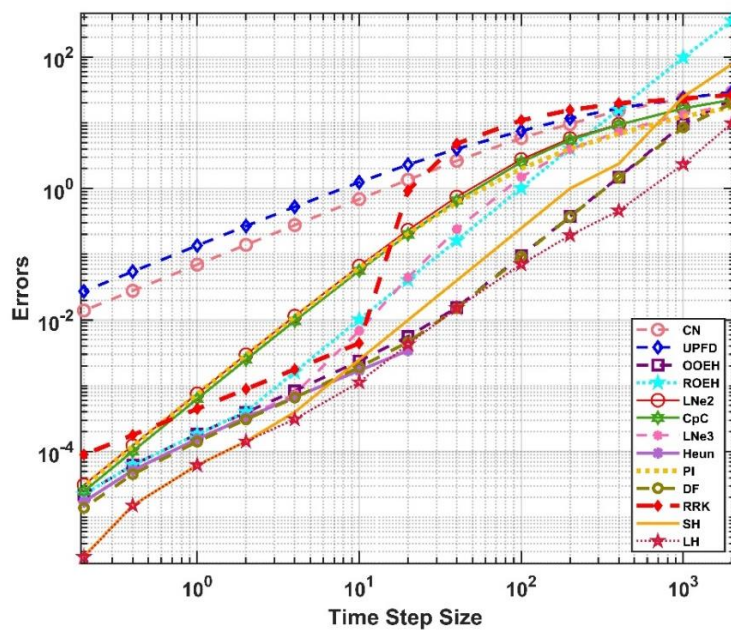


Figure 4.8. The maximum errors as a function of the time step size Δt for the non-equidistant mesh for a wall with insulation.

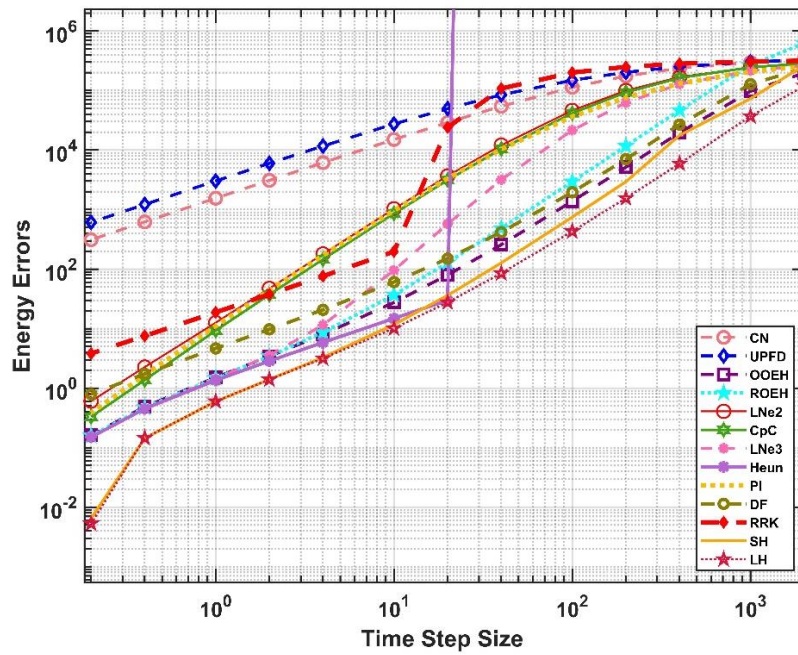


Figure 4.9.
as a function

The energy errors
of the time step

size Δt for the non-equidistant mesh for a wall with insulation

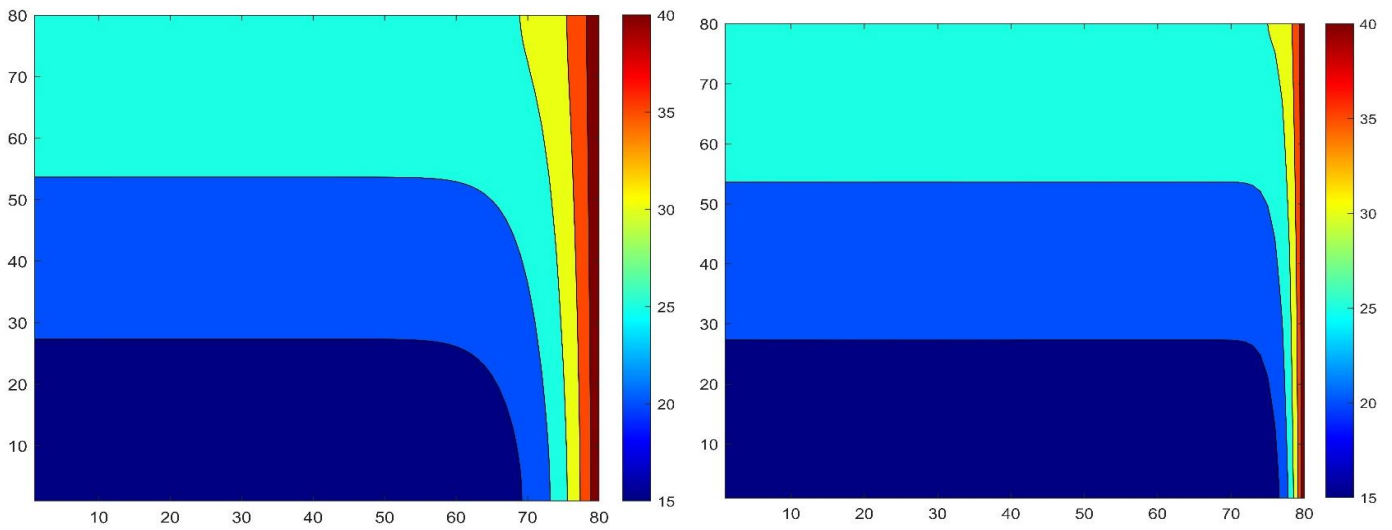


Figure 4.10. The temperature distribution contour for the equidistant mesh at the final time in case of: a wall (left), and a wall with insulation (Right)

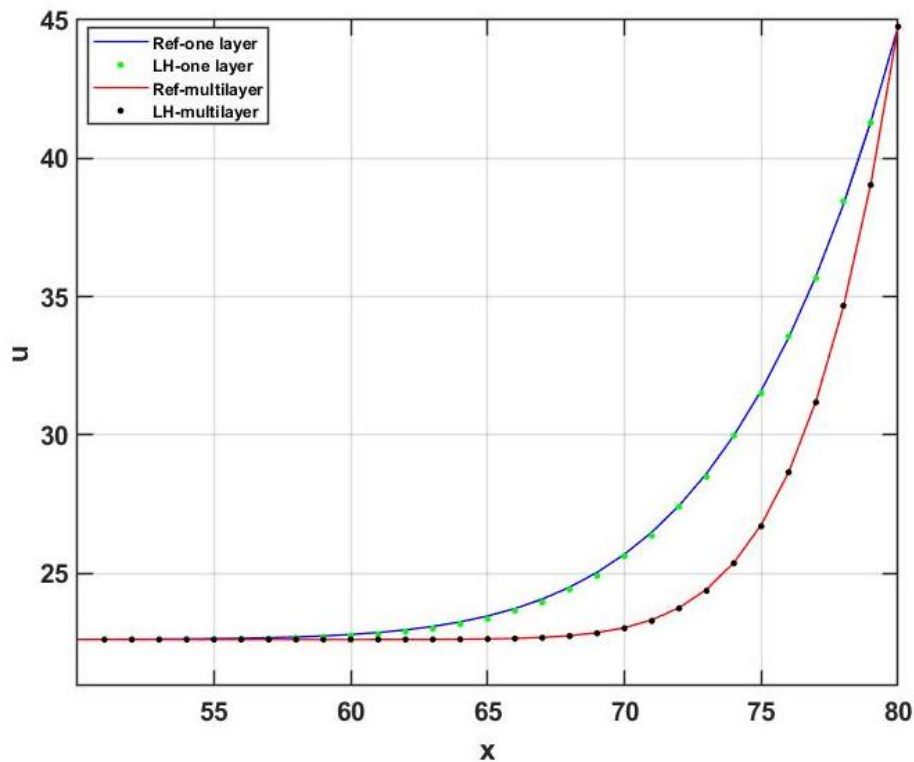


Figure 4.11. The temperature u °C as a function of the cell index in the x direction at the middle row ($z \approx 0.5$) in the case of the reference solution (Ref) and the leapfrog-hopscotch (LH) method for $\Delta t = 400$ in the case of the one-layer wall and the insulated wall using an equidistant grid.

4.1.4. The Summary of The Present Section

I conducted a numerical study on transient heat conduction in a two-dimensional wall, both with and without insulation. I employed eight newly developed and four traditional explicit and stable algorithms, along with the well-known Heun method.

To verify my results, I used an analytical solution of the heat equation with one equidistant and five non-equidistant grids for a wall with homogeneous material properties (a single brick layer). I then examined the insulated wall using the same grid configurations. The boundary condition varied spatially on the brick side and temporally on the insulator side. All methods demonstrated convergence, but their performance varied depending on the conditions.

The methods have the following advantages and disadvantages:

1. The CNe and UPFD are first-order methods and thus less accurate, whereas the other methods are second-order. However, the RRK behaves as a first-order method for large and medium-time step sizes.
2. For uniform (non-stiff) problems, the OOEH method is the most accurate for large and medium-time step sizes. However, with increased stiffness, it can produce larger errors for large-time steps. The LH method consistently produces acceptable errors and is usually the most accurate for stiff systems.
3. Heun's method is conditionally stable and was divergent for most of the time step sizes used, while all other methods are unconditionally stable.

4. The CNe, UPFD, LNe2, LNe3, and CpC methods preserve positivity for any time step size, although they are the least accurate for medium and small-time step sizes.
5. The hopscotch methods (OOEH, ROEH, SH, and LH) require a special bipartite grid but do not need an additional array for temperature storage, minimizing memory requirements. Other methods require at least one extra array for temperature storage.
6. The CNe, UPFD, OOEH, ROEH, DF, SH, and LH methods require only one calculation of the new temperature values per cell per time step, making them the fastest. The LNe2, CpC, Heun, PI, and RRK methods require two calculations per cell per time step, and the LNe3 requires three, making it approximately three times slower than the CNe method.
7. The DF method is a two-step method that needs to be initiated by another method.

In conclusion, I recommend using the OOEH or possibly the LH method for homogeneous material properties and an equidistant grid. For other cases, the LH, and possibly the SH and DF algorithms, are advisable. These methods provide accurate results with significantly larger time step sizes, making them much faster than standard explicit methods prone to instability. However, if unconditional positivity is essential, the LNe3 method should be used for simulating heat conduction.

4.2. Calculate The Heat Conduction, Convection, and Radiation in an Insulated Wall with Thermal Bridging

In the current work, I examined 14 numerical methods to solve the heat transfer problem inside building walls. I considered heat conduction, convection, and radiation, in addition to heat generation. Five of the used methods are recently invented explicit algorithms that are unconditionally stable for conducting problems

4.2.1. The Geometry and Mesh Generation:

As one can see in Figure 4.12, I consider the following cases:

- A) The surface of the wall is made of brick only.
- B) Two-layer cross-section of a wall consisting of brick and glass wool insulator.
- C) The same two-layer cross-section with a steel structure thermal bridge.

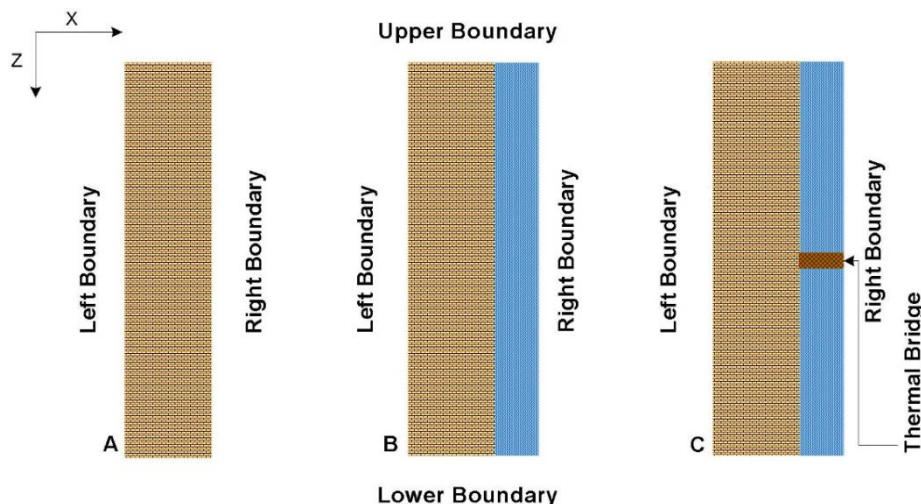


Figure 4.12. (A) One-layer wall, (B) wall with insulator, and (C) wall with insulator and thermal bridge.

In a similar way to generate the mesh in section 4.1.1, I generate the mesh of the current geometries. I apply an equidistant grid in the case of the surface of the wall, while equidistant and non-equidistant grids to the cross-section of the wall with an insulator. In the cross-section case, the left 50% of the cells are always brick and the right 50% are insulator for programming simplicity. It implies that the volume of the brick and the insulator is the same in the equidistant case. However, if I have a gradual change in the x -direction, the thickness of the insulator is smaller (0.269m). The thermal bridge has the same thickness as the insulator in the x direction, thus the horizontal position of the bridge is from $x=0.5\text{m}$ to $x=1\text{m}$ for equidistant and from $x=0.731\text{m}$ to $x=1\text{m}$ for the non-equidistant mesh. The height of the bridge is one cell (1cm) in the z direction, i.e., 0.01m, while it is positioned in row number 50 from $z=0.49\text{m}$ to $z=0.50\text{m}$.

4.2.2. The Materials, and Boundary Conditions:

In the present study, real material properties are taken into account. For the conduction term, they are listed in Table 4.2.

Table 4.2. The properties of the materials used [65].

	ρ (kg · m ⁻³)	k (W · m ⁻¹ · K ⁻¹)	c (J · kg ⁻¹ · K ⁻¹)
Brick	1600	0.73	800
Glass wool	200	0.03	800
Steel structure	7800	16.2	840

I use zero Neumann boundary conditions in all cases for all boundaries, which forbids conductive heat transfer at the boundaries:

$$\frac{\partial u}{\partial x}(x, z = 0, t) = \frac{\partial u}{\partial x}(x, z = 1, t) = \frac{\partial u}{\partial z}(x, z = 0, t) = \frac{\partial u}{\partial z}(x, z = 1, t) = 0.$$

This is implemented by setting zero for the matrix elements describing heat conduction through the boundary via the setting of the appropriate resistances to infinity.

- I. Surface area. In this case, the radiation and convection transfers heat to the y direction, i.e., perpendicular to the plane of Fig. 4.12.

The initial condition is a linear function of the z variable:

$$u(x, z, t = 0) = 303 - 293z.$$

I know that this vertical change of initial temperatures may be rare in the reality, but with this, I can avoid the case when nothing is changing along the z direction which would be a 1D problem mathematically.

For the heat convection, I have used values from the literature [65] for the convection heat transfer coefficient h , as shown in Table 4.3. The universal Stefan-Boltzmann constant $5.67 \cdot 10^{-8} \frac{\text{W}}{\text{m}^2 \cdot \text{K}^4}$ is multiplied by the appropriate emissivity constant since the surface is not a black body. With this, I obtain realistic values for σ^* . The heat generation contains a fraction of the solar radiation, with which I obtain the value of q^* as shown below. The ambient temperature of the air is taken to be $30^\circ\text{C} \approx 303\text{K}$.

Table 4.3. The heat source, convection, and radiation parameters on the wall in case of surface area [65].

	$h \left(\frac{W}{m^2 \cdot K} \right)$	$\sigma^* \left(\frac{W}{m^2 \cdot K^4} \times 10^{-8} \right)$	$q_{sunny}^* \left(\frac{W}{m^2} \right)$	$q_{shadow}^* \left(\frac{W}{m^2} \right)$
All elements	4	4	800	300

The term q contains also the convective heat gain due to the nonzero temperature u_a of the air (in Kelvin), with which I obtain the value of q as follows. The convective and radiative energy transfer is perpendicular to the surface, it is happening in the y direction. Therefore, these are proportional to the free surface area of the element, which is $\Delta x \Delta z$ here. Using this the values of the coefficients in equations (2.20) and (2.28) I obtain:

$$K = \frac{h}{c\rho\Delta y}, \quad \sigma = \frac{\sigma^*}{c\rho\Delta y}, \quad q = \frac{q^*}{c\rho\Delta y} + \frac{h}{c\rho\Delta y} \cdot u_a,$$

where, as it was mentioned, $\Delta y = 1m$.

I supposed that the right half of the surface is in the shadow, thus the incoming heat is much less there. More precisely, I have

- For the first half of N (sunny part): $q = \frac{1}{c\rho} \times 800 \frac{W}{m^2} + \frac{h}{c\rho} \times 303K$;
- For the second half of N (shadow part): $q = \frac{1}{c\rho} \times 300 \frac{W}{m^2} + \frac{h}{c\rho} \times 303K$.

II. Cross Sectional Area: In this case, the interior elements cannot gain or lose heat by the heat source, heat convection, or radiation. Elements on the right and left sides can transfer heat by radiation and convection to the x direction with the values shown in Table 4.4.

Table 4.4. The heat source, convection, and radiation parameters on both sides of wall elements in case of cross-sectional area.

	$h \left(\frac{W}{m^2 \cdot K} \right)$	$\sigma^* \left(\frac{W}{m^2 \cdot K^4} \times 10^{-8} \right)$	$q^* (W)$
Right Elements	2	5	500
Left Elements	4	4	500

I supposed that the right elements and left elements have the following heat source convection and radiation as follows:

- For the left elements (interior side): $q = \frac{1}{c\rho} \times 500 \frac{W}{m^2} + \frac{h}{c\rho \cdot \Delta x} \times 293K$
- For the right elements (external side): $q = \frac{1}{c\rho} \times 500 \frac{W}{m^2} + \frac{h}{c\rho \cdot \Delta x} \times 303K$

The initial condition is again a linear function of the z variable:

$$u(x, z, t = 0) = 303 - 288z$$

4.2.3. The Simulation Results

4.2.3.1. In Case of Surface Area of The Wall

I simulated a one-layer brick wall (see Figure 4.12.A). As it is written in point I. above, I applied linear initial and zero Neumann boundary conditions. I have performed the simulations with the equidistant mesh. In Fig. 4.13 the maximum errors as a function of the time step sizes are presented for all methods. Note that the hopscotch-type algorithms, especially the original OOEH and the NS-OEH, are more accurate than the other algorithms. Heun's method is very accurate only below the CFL limit, but above this limit, it cannot give any meaningful results. In Fig. 4.14 I presented the initial and the final temperature distribution, where both the effect of the initial condition and the shadow on the right side of the wall can be observed.

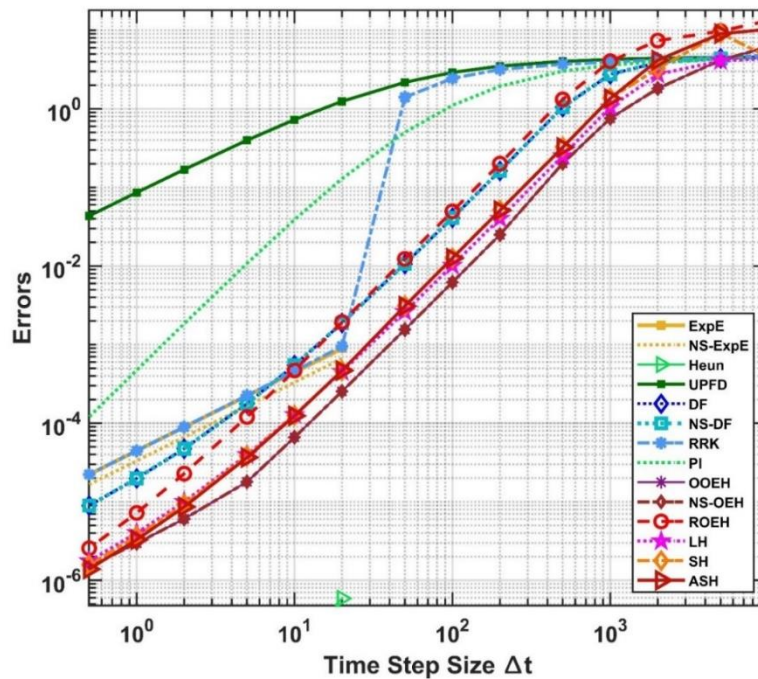


Figure 4.13. The maximum errors as a function of the time step size Δt for the 14 examined methods in the case of a surface area.

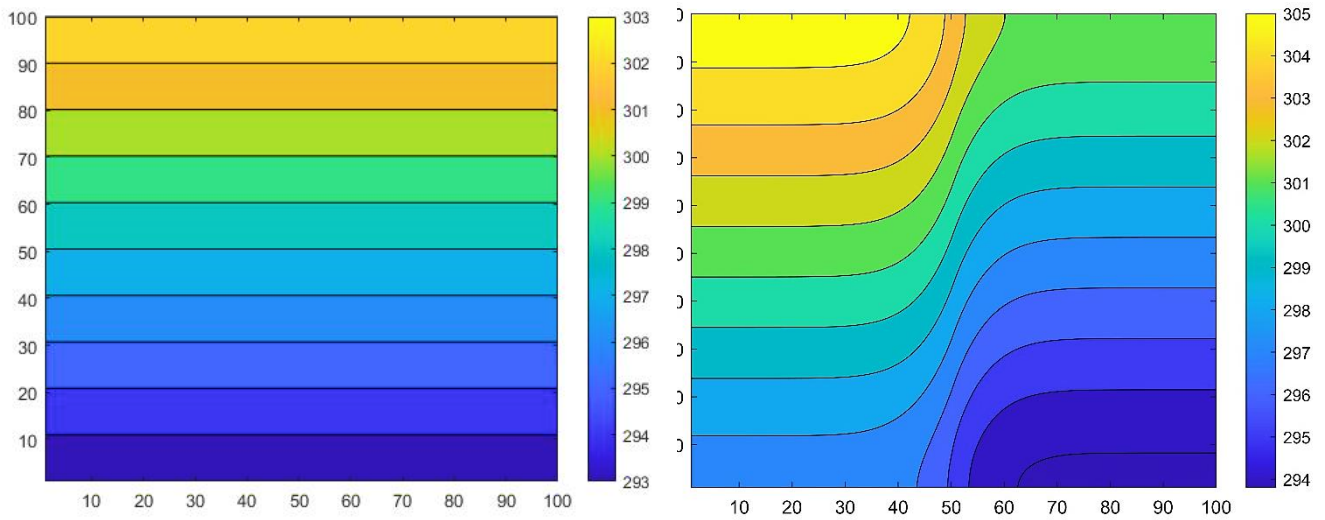


Figure 4.14. The temperature distribution contour in Kelvin for the equidistant mesh at initial (left) and final time (right), in the case of multilayer cross-sectional area. The numbers on the vertical and horizontal axes of the contours are the indices of the cells, which are the same as the coordinates in cm units.

4.2.3.2. The Results of Cross-Section of a Brick Wall with Insulation

I applied the linear initial and Neumann boundary condition of point II for the multilayer wall. The maximum errors are plotted for equidistant and non-equidistant meshes in Fig. 4.15 and 4.16, while the energy errors for the non-equidistant mesh can be seen in Fig. 4.17. The temperature distribution contours for the initial and final time moments are shown in Figure 4.18. One can see that the temperature of the right-hand side of the wall is increasing due to the larger temperature outside, but the insulator lets this heat to penetrate the wall only very slowly.

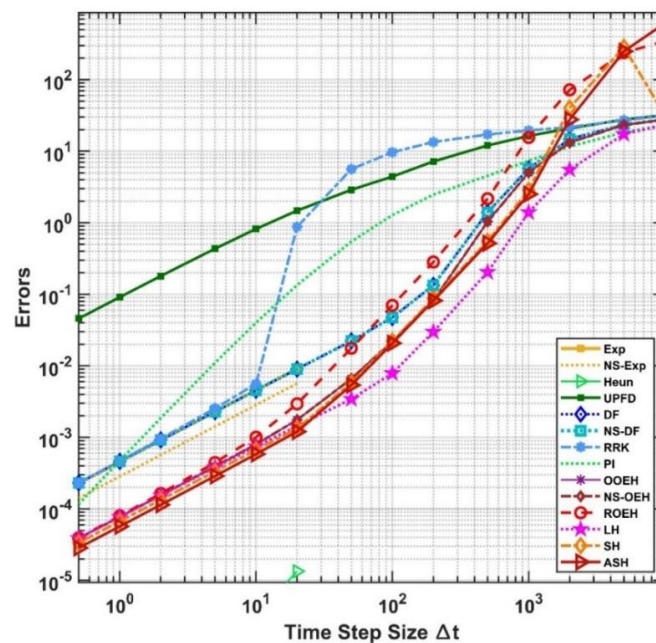


Figure 4.15. The maximum errors as a function of the time step size Δt for the equidistant mesh.

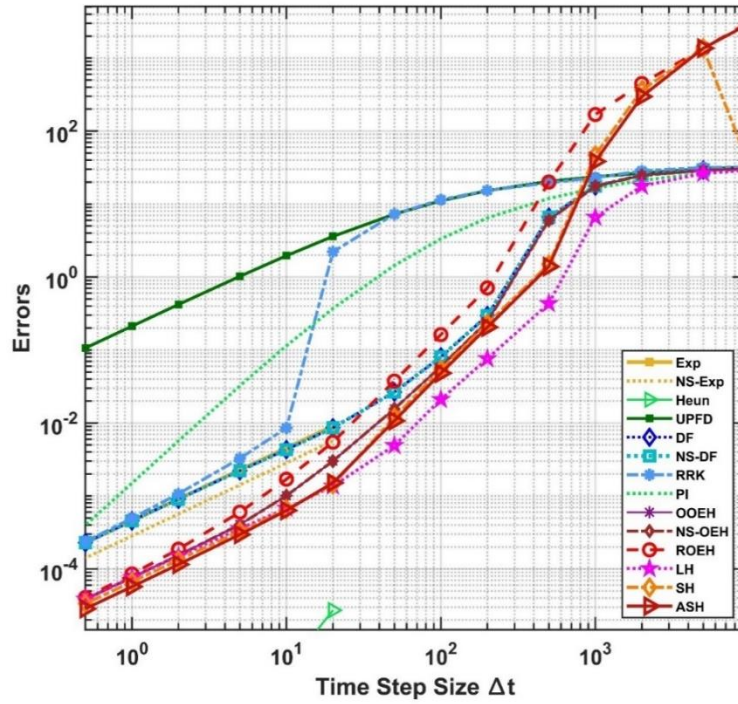


Figure 4.16. The maximum errors as a function of the time step size for the non-equidistant mesh.

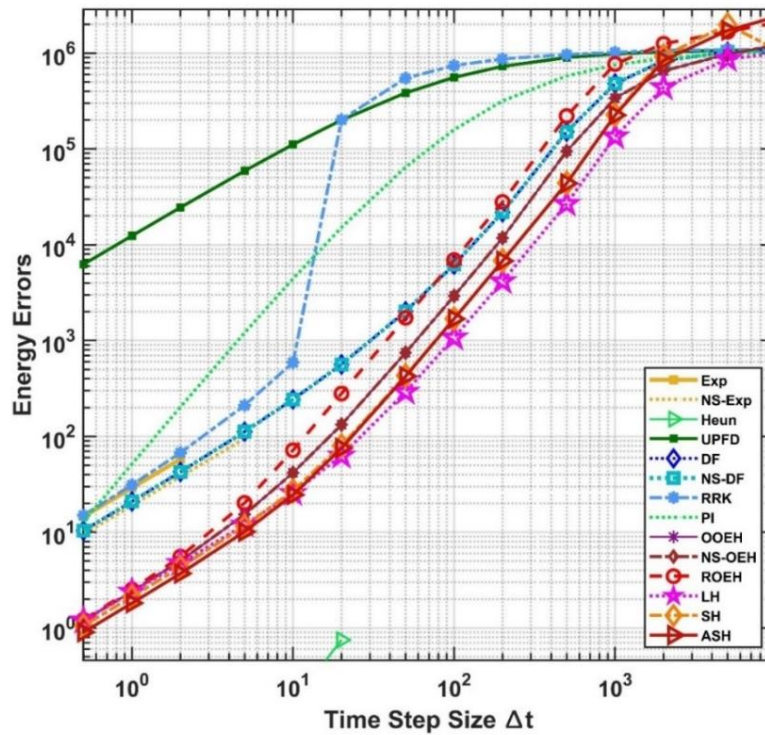


Figure 4.17. The energy errors as a function of the time step size Δt for the non-equidistant mesh

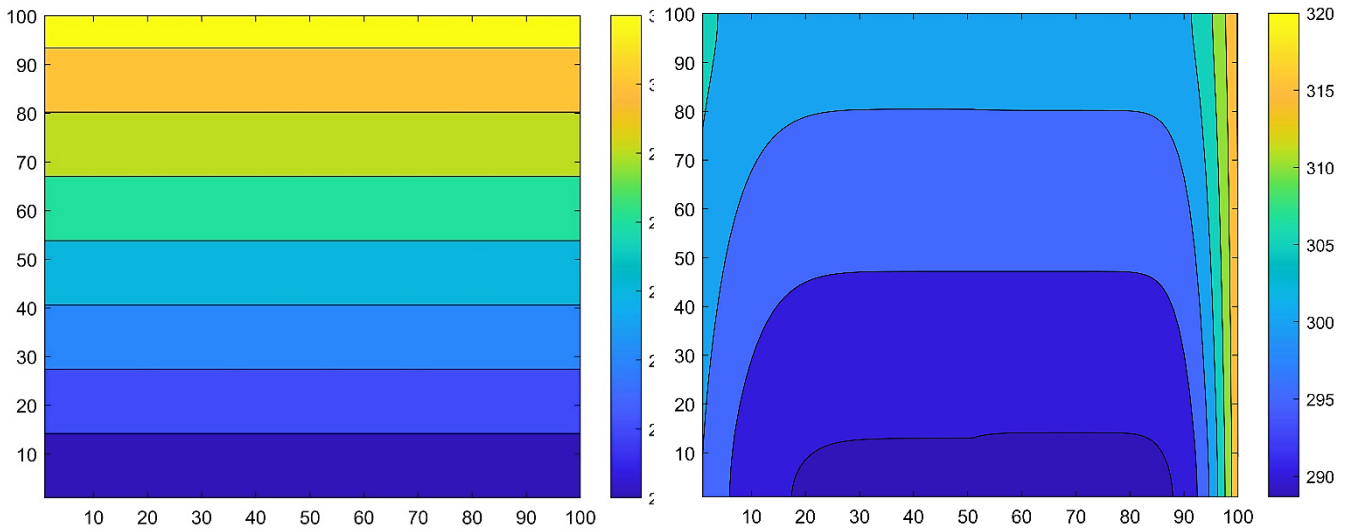


Figure 4.18. The temperature distribution contour in Kelvin for the equidistant mesh at initial (left) and final time (right), in the case of the multilayer cross-sectional area. The numbers on the vertical and horizontal axes of the contours are the indices of the cells.

4.2.3.3. The Results of Cross-Section of a Brick Wall with Insulation and Thermal Bridging

I apply again the conditions enlisted in point II for the multilayer wall with thermal bridging. The maximum errors are plotted for equidistant and non-equidistant meshes in Fig. 4.19 and 4.20, respectively, while the energy errors for the non-equidistant mesh can be seen in Fig. 4.21. The maximum and the energy error curves are very similar, the most noticeable difference is that the SH and the ASH methods have larger maximum errors but smaller energy errors than the DF and the NS-DF methods.

In Fig. 4.22, the temperature contour is presented for the initial and the final time moments, for the equidistant mesh. To let the readers see the effect of the thermal bridge more accurately, I constructed Fig. 4.23, where the final temperature for $z=0.495$ as a function of the x variable is shown with and without the thermal bridge.

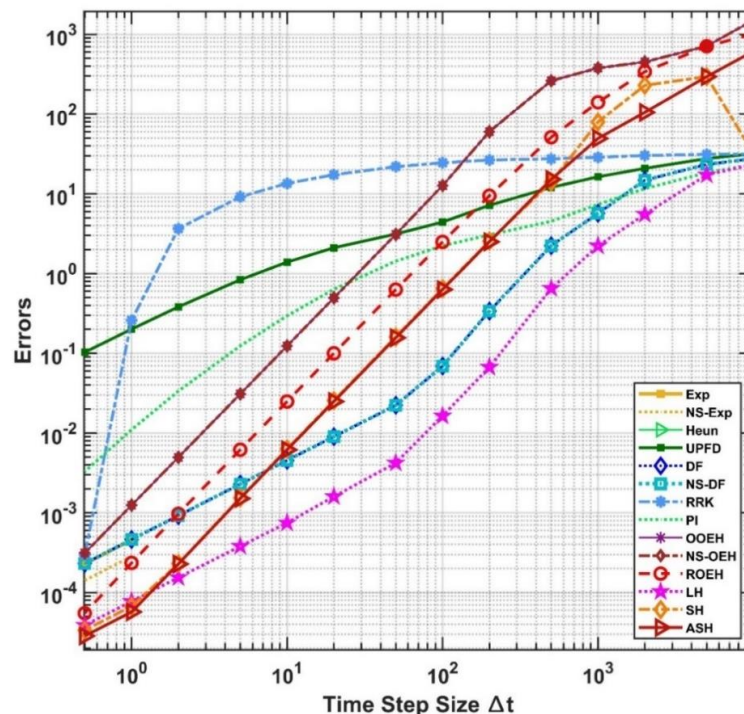


Figure 4.19. The maximum errors as a function of the time step size Δt for the equidistant mesh and thermal bridging.

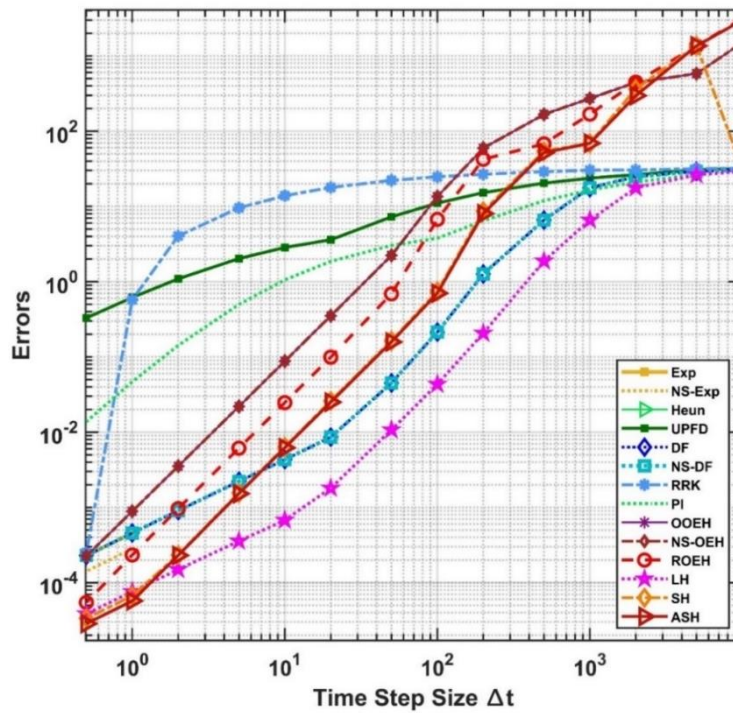


Figure 4.20. The maximum errors as a function of the time step size for the non-equidistant mesh.

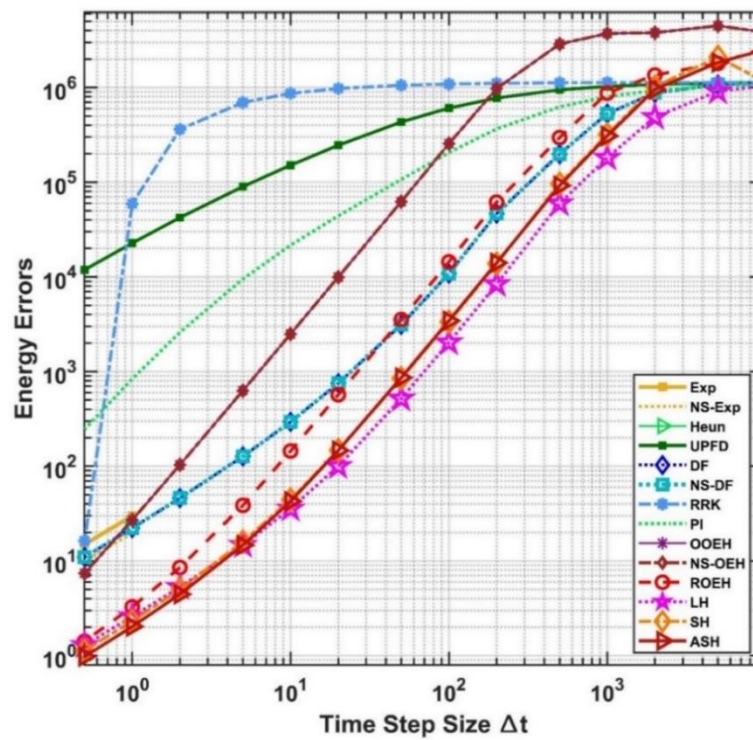


Figure 4.21. The energy errors as a function of the time step size for the non-equidistant mesh.

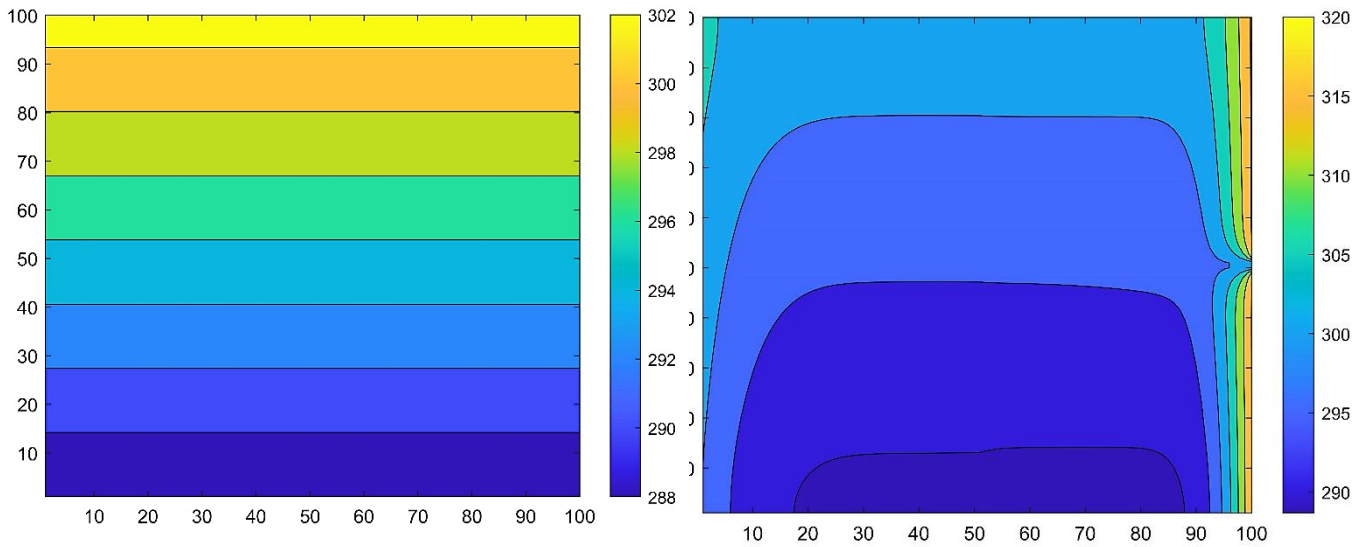


Figure 4.22. The temperature distribution contour for the equidistant mesh at initial (left) and final time (right) in case of multilayer cross-sectional area with thermal bridging.

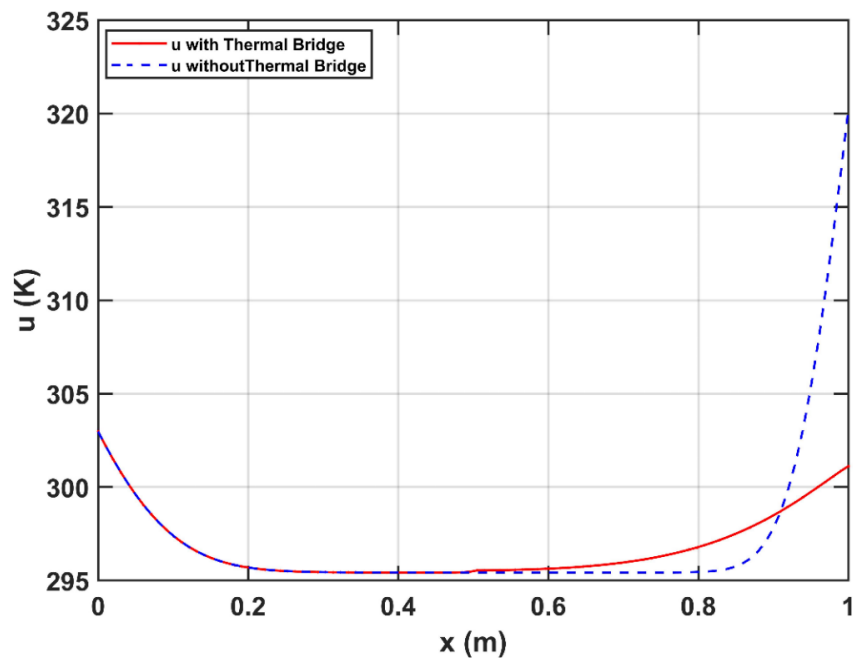


Figure 4.23. The temperature as a function of the space variable x at the middle row ($z \approx 0.5$) in the case of the multilayer insulated wall with and without thermal bridging using an equidistant grid.

4.2.4. The Summary of The Present Section

I adopted 14 fully explicit numerical algorithms to solve transient heat transfer problems including heat conduction, convection, and radiation. I applied the algorithms to two-dimensional systems of a surface area and a cross-sectional area of a wall. This latter one consisted of a brick wall with a glass wool insulator layer, and it contained a thermal bridging steel structure. I used equidistant and non-equidistant grids for the cross-section area. Zero Neumann boundary conditions were applied and the ode15s MATLAB routine was used as a

reference solution. I showed that all of the methods can be used for these simulations, but those that were proven to be unconditionally stable for the heat conduction equation have much better stability properties in this more general case as well. These methods can be used by quite large time step sizes without stability problems, thus the traditional explicit time integrators are severely outperformed by them. For less stiff systems, the non-standard version of the odd-even hopscotch and the leapfrog-hopscotch methods are the most accurate. However, as stiffness increases due to material inhomogeneities or the non-equidistant grid, the odd-even hopscotch method becomes less accurate and the leapfrog-hopscotch takes the lead, while the Dufort-Frankel scheme and the shifted- and asymmetric hopscotch methods also perform well. The UPFD method is the least accurate, but it has the advantage that it preserves positivity of the temperatures for arbitrary time step size even for this highly nonlinear case. I note that for very small-time step sizes, Heun's method can be extremely accurate, but this level of accuracy is redundant in most fields of engineering, including building energetics.

4.3. Calculate The Heat Transfer in Cylindrical and Spherical Shaped Bodies

In this part, I reproduced new analytical solutions with high accuracy using recent explicit and unconditionally stable finite difference methods. After this, real experimental data from the literature regarding a heated cylinder are reproduced using the explicit numerical methods as well as using Finite Element Methods (FEM) ANSYS workbench. Convection and nonlinear radiation are also considered on the boundary of the cylinder.

The heat-transport equation in a 3D cylindrical coordinate system, which can be written as:

$$\frac{1}{r} \frac{\partial}{\partial r} \left(k r \frac{\partial u}{\partial r} \right) + \frac{1}{r^2} \frac{\partial}{\partial \phi} \left(k r \frac{\partial u}{\partial \phi} \right) + \frac{\partial}{\partial z} \left(k \frac{\partial u}{\partial z} \right) + \frac{Q_{gen}}{\Delta V} - \frac{hSu}{\Delta V} - \frac{\sigma^* Su^4}{\Delta V} = \rho c \frac{\partial u}{\partial t} \quad (4.4)$$

In the case of spherical coordinates, a small 3D spherical element can be seen in Figure 2.3 The heat transport equation for this case can be expressed as follows:

$$\frac{1}{r^2} \frac{\partial}{\partial r} \left(k r^2 \frac{\partial u}{\partial r} \right) + \frac{1}{r^2 \sin^2 \theta} \frac{\partial}{\partial \phi} \left(k r \frac{\partial u}{\partial \phi} \right) + \frac{1}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \left(k \sin \theta \frac{\partial u}{\partial \theta} \right) + \frac{Q_{gen}}{\Delta V} - \frac{hSu}{\Delta V} - \frac{\sigma^* Su^4}{\Delta V} = \rho c \frac{\partial u}{\partial t} \quad (4.5)$$

If one does not consider the convection, radiation, and source terms in Equation (4.4) and assumes that the material properties are homogeneous, one obtains the form of the heat conduction equation in cylindrical and spherical coordinate systems. Symmetrical systems only investigated, which means no relevant physical quantities depend on coordinate ϕ in the cylindrical and on coordinates ϕ and θ in the spherical case, which can be considered as a limitation of this study. If I temporarily also assume that nothing depends on the z coordinate in the cylindrical case, only the radius r remains as a spatial variable, which yields

$$\frac{\partial u}{\partial t} = \alpha \frac{1}{r^n} \frac{\partial}{\partial r} \left(r^n \frac{\partial u}{\partial r} \right), \quad (4.6)$$

where $n = 0, 1$ and 2 , which means Cartesian, cylindrical, and spherical coordinates, respectively, while $\alpha = \frac{k}{c\rho}$ is the (thermal) diffusivity. Equation (4.6) is also used for particle diffusion, where the diffusivity is usually denoted by D .

4.3.1. *The Geometry, Materials, Mesh generation, and Boundary Conditions*

I am going to reproduce the experimental results of Cabezas et al. [66], where heat transfer was studied in a steel C45 cylinder of 168 mm total height with properties shown in Table 4.5 below.

Table 4.5. The properties of the steel used [66??].

Material	ρ (kg·m ⁻³)	k (W·m ⁻¹ ·K ⁻¹)	c (J·kg ⁻¹ ·K ⁻¹)
Steel C45	7800	40	480

The bottom of the cylinder was heated for 30 s at the beginning of the experiment with $P = 1500\text{W}$ power. However, in the original work [37], the position of the lowest thermocouple was 50mm higher than the heated surface. The top 118 mm and not the bottom 50 mm of the cylinder was examined either experimentally or numerically, and I followed this in my work. This means that the simulated volume of the cylinder segment is $V = 1.0087 \times 10^{-4} \text{ m}^3$, while $(r, z) \in [0, 0.0165\text{m}] \times [0, 0.118\text{m}]$. In my approximation, physical quantities did not change in the ϕ -direction, thus, that 3D dimensions was irrelevant and, computationally, I dealt with a two-dimensional problem. The number of the cells along the r axis and z axis were set to $N_r = 15$ and $N_z = 100$; thus, the total number of the cells in the system was $N = N_r N_z = 1500$.

I used a constant initial condition in all cases.

$$u(r, z, t = 0) = 30.7 \text{ }^\circ\text{C}$$

I used different boundary conditions on different sides. On the left side, the center of the cylinder, I applied Neumann boundary conditions in all cases, which do not allow conductive heat transfer at the boundary

$$u_r(r = 0, z, t) = u_r(r = L_r, z, t) = u_z(r, z = L_z, t) = 0.$$

On the right (external) and upper boundaries, I used two types of boundary conditions. The first one was zero-Neumann, when there was no heat exchange with the environment. The second one, when there was a heat exchange with the environment via convection and radiation, considered the heat convection coefficient $h = 4.5 \text{ (W} \cdot \text{m}^{-2} \cdot \text{K}^{-1})$ [38] and the emissivity constant as 0.85 to obtain realistic values for σ^* . The convective and radiative energy transfer was perpendicular to the surface. The interior elements cannot gain or lose heat by the heat source, heat convection, or radiation.

On the lower boundary, I applied changing Dirichlet boundary conditions based on the temperature measurement results taken from a report I asked from the authors of [66]. That report contained data from every two minutes, and I used linear interpolation between these data points in all cases to follow the experimental setup of the paper [66].

The heat generation contained incoming heat via convection and radiation depending on the ambient temperature. Since the steel cylinder was placed in a closed box, this ambient temperature changed during the measurement. Instead of the ambient temperature functions, I used their averages taken from the report mentioned above. The ambient temperature of the air was taken as (30.7, 31.1, and 31.7 °C) in the cases of measurements at 20 min, 24 min, and 30 min duration, respectively.

4.3.2. Verification Using the Analytical Solution

In this section, I take the height of the cylinder as well as Δz unity. It means that, computationally, there is one space dimension only in both the cylindrical and the spherical case. The solution parameters are:

$$N_r = 500, N_z = 1, N = N_r \times N_z = 500, r_0 = 0.0003, r_{max} = 0.999, \Delta r = 0.002, \alpha = 1,$$

$$a \in \{1, 1.2, 2\}, c_1 = 1, c_2 = 0, t^0 = 0.1, t^{fin} = t^0 + 0.1.$$

Here, N represents the total number of cells, while r_0 and r_{max} are the radial coordinates of the center of the first and last cells. The CFL limit (maximum allowed time-step size for the standard first order forward Euler method) was around $2 \cdot 10^{-6}$ in all cases. The initial condition was obtained by substituting the initial t and boundary r values into the analytical solution, respectively. The Dirichlet boundary conditions on the right side (the circumference of the cylinder and sphere) were obtained simply by substituting the radius r_{max} into the analytical solution and calculating the function value at each time step. On the left side (the cylinder and sphere center, $r = r_0$), zero-Neumann boundary was applied, since no heat can disappear from the center of the cylinder or the sphere. This boundary was applied only computationally and not physically. I remind the reader that the analytical solutions are constructed for Equation (4.6).

The obtained maximum errors are displayed as a function of the time-step size in Figures 4.24 and 4.25 for two values of parameter a in cylindrical coordinates. Figure 4.26 presents the temperature value as a function of r . For the case of spherical coordinates, Figure 4.27 shows the maximum error as a function of the time step, and Figure 4.28 presents the temperature as a function of r . The fact that we obtained very small errors in all cases verifies not only the numerical algorithms, but the equivalence of the two mathematical treatments of the physical problem.

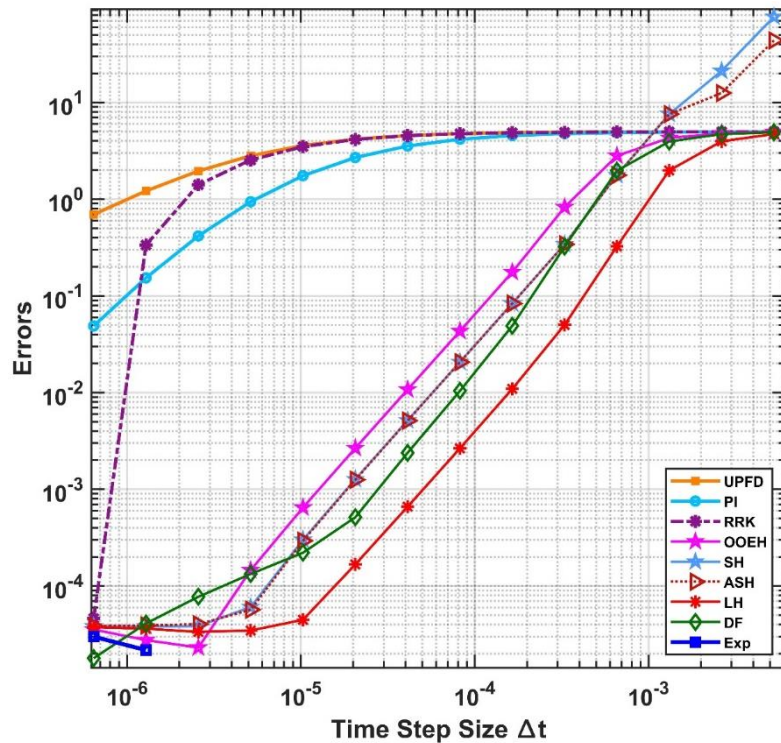


Figure 4.24. The maximum errors as a function of the time step size for the 9 numerical methods in case of cylindrical coordinates for $a = 1$.

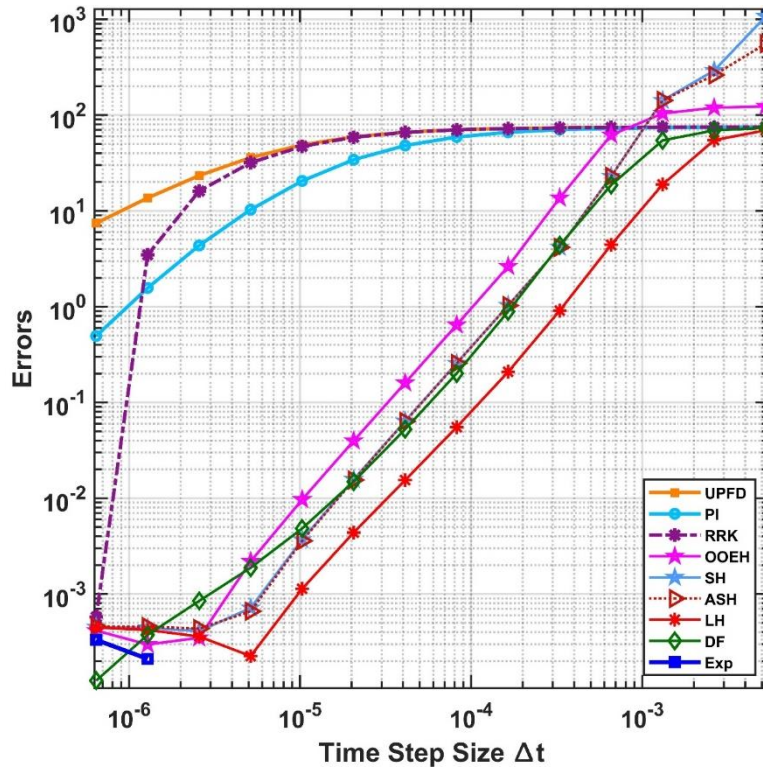


Figure 4.25. The maximum errors as a function of the time step size for the 9 numerical methods in case of cylindrical coordinates for $a = 2$.

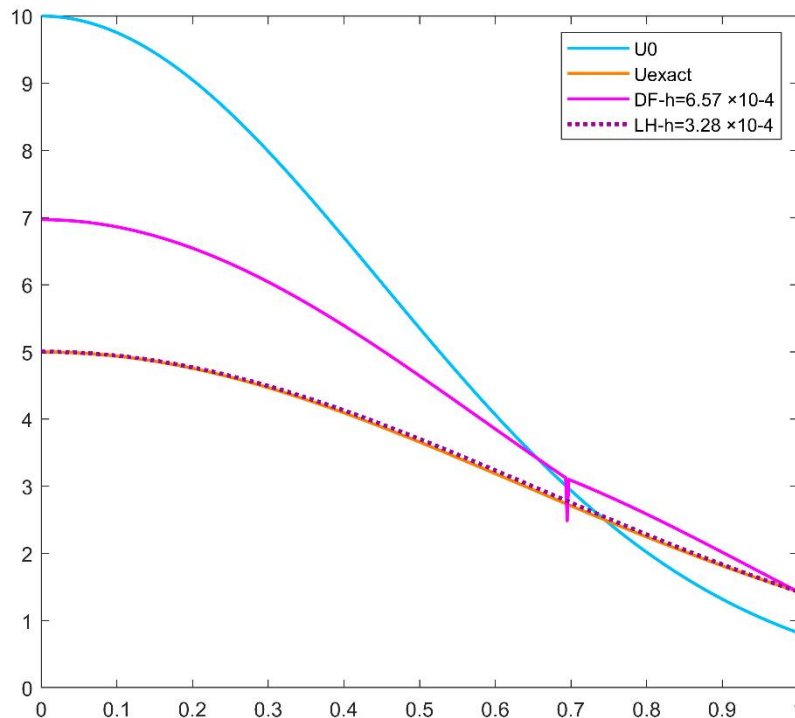


Figure 4.26. The values of temperature as a function of variable r in case of the initial function u^0 , the analytical solution U_{exact} , the DF method, and the LH method in case of cylindrical coordinates for $a = 1$.

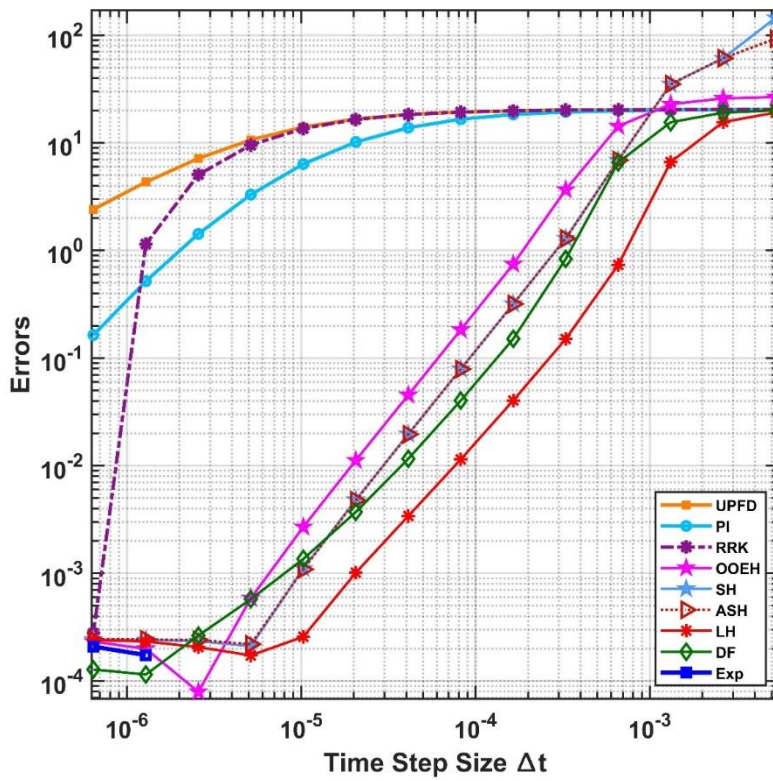


Figure 4.27. The maximum errors as a function of the time step size for the 9 numerical methods in the case of spherical coordinates for $a = 1.2$.

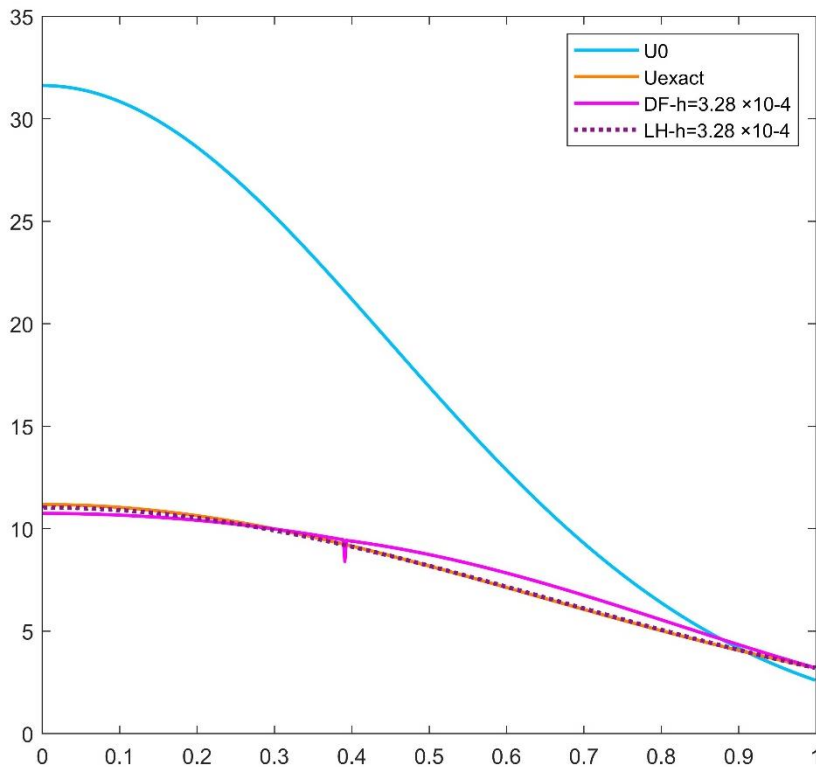


Figure 4.28. The values of temperature as a function of r variable in case of the initial function u^0 , the analytical solution U_{exact} , the DF method, and the LH method in case of spherical coordinates for $a = 1.2$.

4.3.3. The Simulation Results

In this section, I present the results at the end of the examined time interval, which is defined as $t_{fin} = 1200, 1440$ and 1800 s in both the numerical methods and Ansys simulation and then compare between them with the experimental results.

4.3.3.1. The Results of Numerical Methods

For the simulation, I chose the top five algorithms, namely DF, OOEH, LH, SH, and ASH. The simulation of a steel C45 cylinder was conducted using these selected algorithms considering different boundary conditions, as previously mentioned. Among these algorithms, the shifted-hopscotch method was chosen to visualize the temperature contour due to its high accuracy at small time-step size. Figures 4.29 and 4.30 display the final temperature distribution obtained from this method.

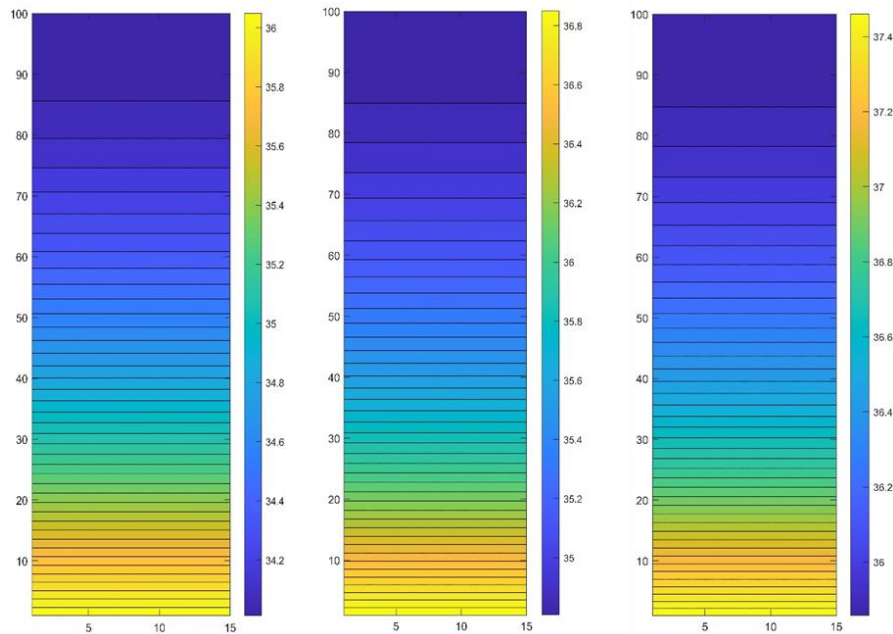


Figure 4.29. The final temperature distribution contour for different time values ($t = 20, 24,$ and 30 min, respectively, from left to right) presented by the SH method when there is no heat exchange with the environment

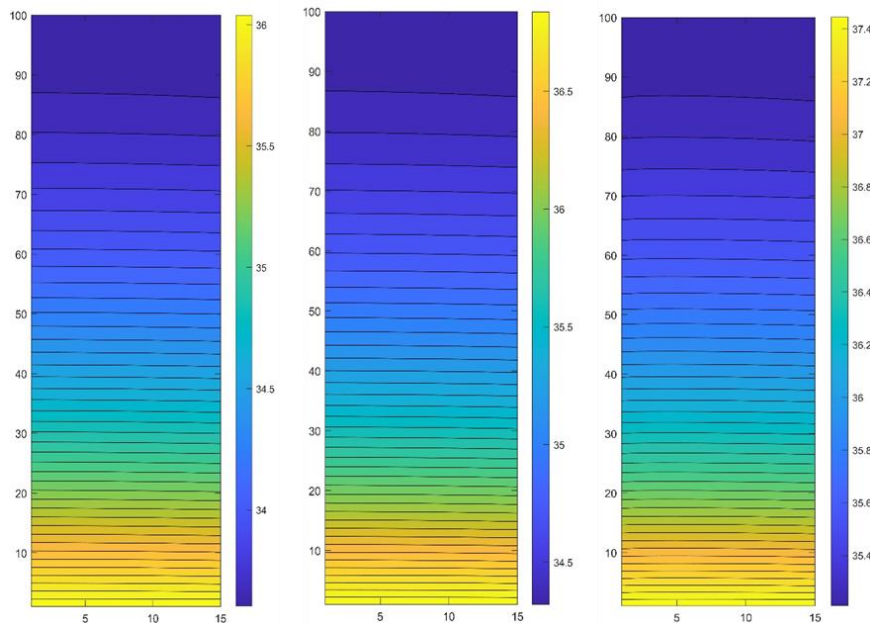


Figure 4.30. The temperature distribution contour for different time values ($t = 20, 24,$ and 30 min) presented by the SH method when there is heat exchange with the environment via convection and radiation.

4.3.3.2. *The Results of Ansys Simulation*

Ansys workbench 19.2 transient thermal analysis with Mechanical APDL solver was used to simulate the steel C45 cylinder. The mesh size was 1×10^{-3} , and the total number of elements was 197,183 since it was a computationally 3D problem. In Figures 4.31 I present the sample of temperature contour at the final time.

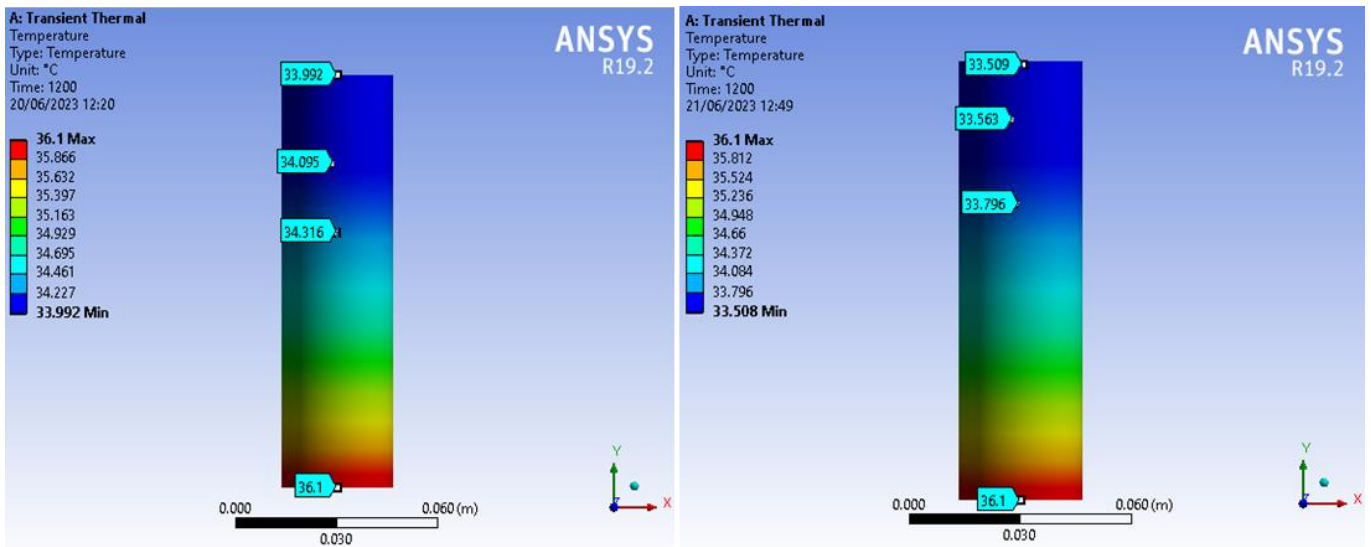


Figure 4.31. The temperature contour at time ($t = 20$ min) presented by Ansys when there is no heat exchange with the environment (**left**) and when there is a heat exchange (**right**)

4.3.3.3. *Comparison The Results*

The results of the experimental measurements, the finite element method (FEM) using Ansys Workbench, and the explicit numerical methods (exemplified by the shifted hopscotch method) were compared. Both FEM and SH were subjected to two types of tests, one considering convection and radiation effects, and the other excluding them. First, I employed steady-state thermal analysis using FEM Ansys Workbench to follow the original paper [66] to reach the same results. The maximum deviation was 0.07, which was a kind of verification for setup. Then, I used transient thermal analysis to follow the real physical processes of the experiment. All results below are for this transient simulation. In Tables 4.6–4.7, the comparison was conducted at two specific spatial points ($z = 75,$ and 95 mm, which are the distance from the bottom measurement point), and the results were measured at three different time moments. The temperatures are compared at two space points via plots in Figures 4.32–4.34.

Table 4.6. The temperature at $z = 125$ mm at three different time moments.

Time	Temperature in °C, at $z = 75$ mm				
	Experiment	SH with CR	SH	FEM with CR	FEM

USE EFFICIENT METHODS TO SOLVE REAL-LIFE HEAT TRANSFER PROBLEMS

20 min	33.9	33.941	34.298	33.796	34.316
24 min	34.6	34.668	35.087	34.534	35.128
30 min	35.7	35.514	36.07	35.283	36.036

Table 4.7. The temperature at $z = 145$ mm at three different time moments.

Time	Temperature in °C, at $z = 95$ mm				
	Experiment	SH with CR	SH	FEM with CR	FEM
20 min	33.7	33.71	34.099	33.563	34.095
24 min	34.5	34.427	34.88	34.285	34.88
30 min	35.5	35.30	35.92	35.093	35.856

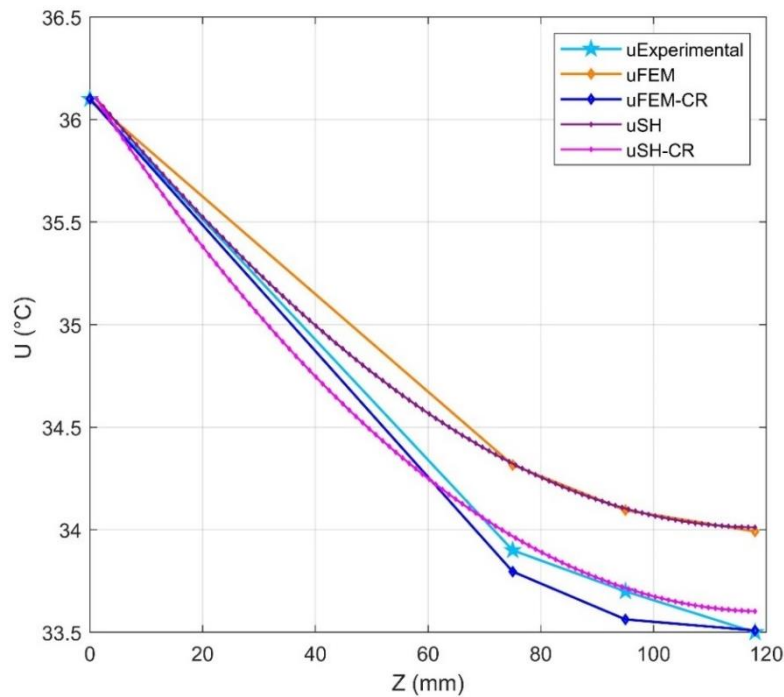


Figure 4.32. The temperature at the 4 selected measurement points in z at time $t = 20$ min.

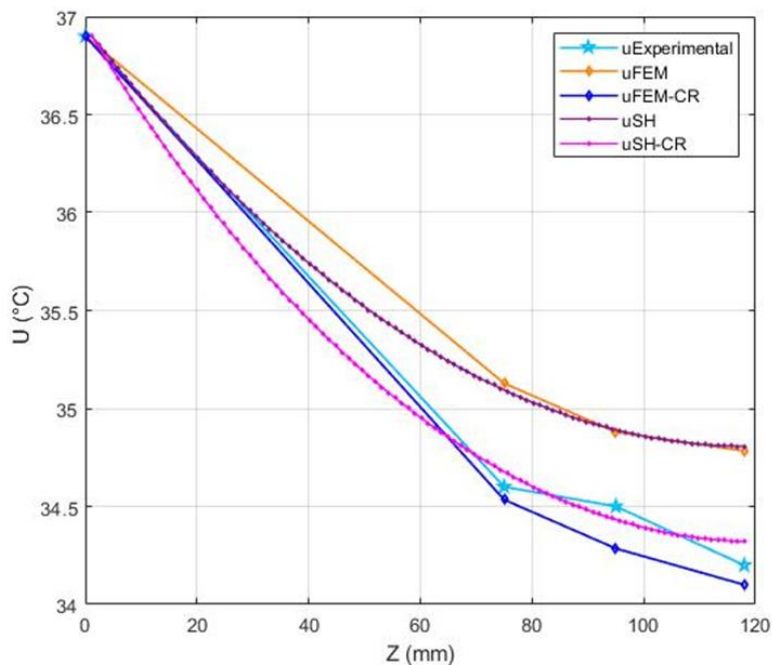


Figure 4.33. The temperature at the 4 selected measurement points in z at time $t = 24$ min.

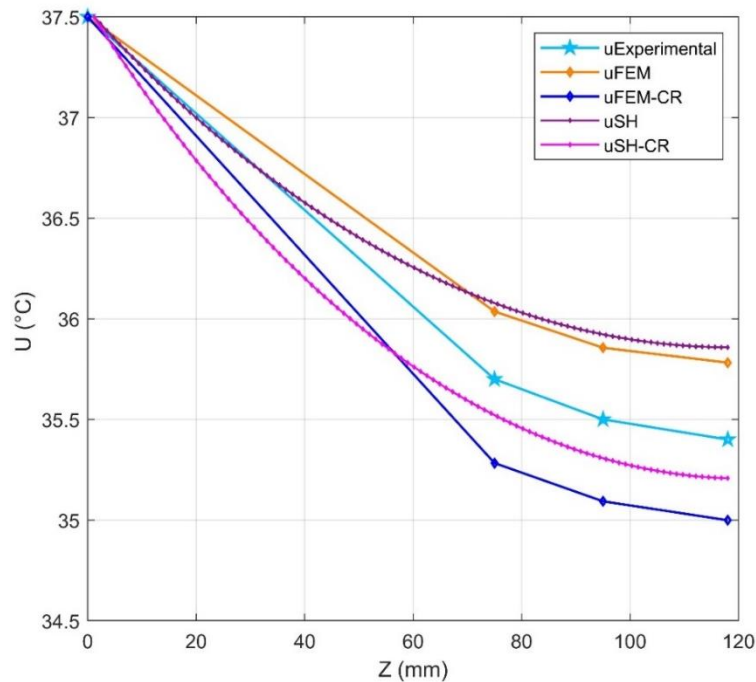


Figure 4.34. The temperature at the 4 selected measurement points in z at time $t = 30$ min.

The figures and tables presented above illustrate a comparison of results obtained from the current numerical methods and the FEM ANSYS, utilizing experimental data from the literature study [37]. The findings indicate that the numerical methods employed in this study demonstrate superior accuracy compared with the FEM ANSYS used in both the current investigation and the same literature study [68] [37].

4.3.4. The Summary of The Present Section

This work was devoted to solving heat transfer problems in cylindrical and spherical geometries. Using the self-similar Ansatz, novel analytical solutions of the heat-conduction PDE were constructed, which contained the Kummer’s functions. Nine numerical algorithms were presented, most of which are recently introduced unconditionally stable explicit methods. To perform the verification, the novel analytical solutions of the heat-conduction PDE containing the Kummer’s functions were reproduced by these methods with high accuracy.

After these, experimental work was considered from the literature where a cylinder is heated from below, and the results were attempted to be reproduced using Ansys commercial software, but without considering convection and radiation on the surface of the cylinder. In contrast to that, I reproduced the experimental results by considering convection and radiation as well, not only using the Ansys, but the explicit methods as well. Since, in reality, convection and radiation are present, taking them into account makes the results closer to the experimental ones, especially for the first two measurement times. Moreover, the explicit and stable schemes were more accurate and effective than the finite element software in all cases. The LH algorithm was usually the most accurate among the studied methods. However, similarly to all hopscotch methods, it needs a special mesh, which can be hard or maybe impossible to implement for

problems with irregular shapes. This limitation of these methods is probably more restrictive in complicated 3D problems.

4.4. Calculate The Heat Transfer in Multilayer Walls with Photovoltaic Cell and Air.

This section explores the simulation of non-linear transient heat transfer in multilayer walls subjected to various heat loads using efficient numerical algorithms. The study considers conduction, free and forced convection, and nonlinear radiation involving a two-phase material composed of solid (wall construction) and fluid (air). Different wall geometries and heat load scenarios are examined, encompassing both cooling and heating cases. The objective is to evaluate algorithm performance for outdoor surface convection and an air gap between insulation and PVC.

4.4.1. Geometry Model and Mesh Generation

Figure 4.35 helps to visualize the geometry and the environment for inside and outside of the wall section, with zooming on the selection cross sectional area in the middle of the wall (the upper half is sunny and the lower half is in shadow) that will be simulated.

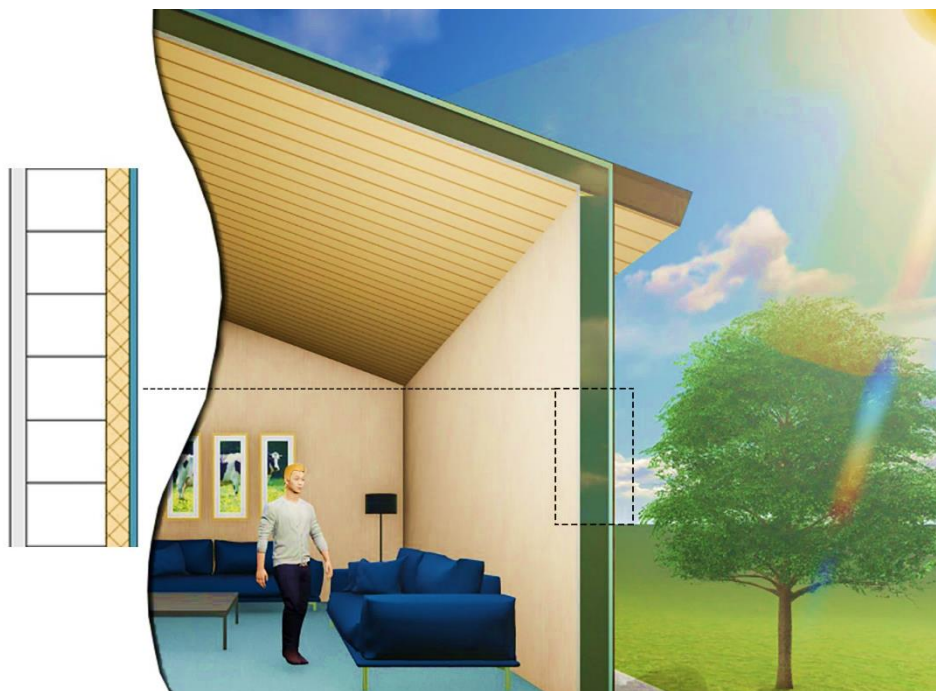


Figure 4.35. Visualization of the studied case, the selected wall cross-section

The geometry is a multilayer wall with an air gap. The order of the media is the following: gypsum board, brick, glass wool, air gap, Photovoltaic Cell (PVC), and then air. I also investigated free and forced convection with cooling as well as heating process. In this scenario, there are different kinds of convection depending on the air status on both sides of the PVC, when the air is moving (forced convection) and when the air is stationary (free convection). From this point of view, there are three subcases:

- A. free-free convection means the air is stationary on both sides of the PVC,

- B.** free-forced convection: the air is stationary in the air gap zone and the air is moving on other side of the PVC.
- C.** forced-forced convection: the air is moving on both sides of the PVC, so in this case there is a forced convection on both sides of the PVC. This case is useful in cooling of photovoltaic when it warms up due to the hot weather especially in summer or in a hot climate area, when the solar cell's temperature exceeds the optimum operation temperature.

I consider a wall segment with a cross section area $S = L_x \times L_z$ with value $0.5 \text{ m} \times 0.5 \text{ m}$. $(x, z) \in [0, 0.5] \times [0, 0.5]$, thus the meshes total area is 0.25 m^2 . I have constructed an equidistant grid with square cells shaped for all cases. The number of the cells along the x and z axes are set to $N_x = 100$ and $N_z = 100$, thus, I have a mesh with a total cell number $N = N_x N_z = 10,000$. The cells are indexed as a linear sequence, starting from the top left corner horizontally and ending at the bottom right corner. Due to this the cell indexed by $i + N_x$ is just below the cell labelled by i , etc.

4.4.2. Materials and Boundary Conditions

In the current study, I use real material properties for wall construction, as shown in Table 4.8.

Table 4.8. The materials used properties [67]-[69].

Material	ρ ($\text{kg} \cdot \text{m}^{-3}$)	k ($\text{W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$)	c ($\text{J} \cdot \text{kg}^{-1} \cdot \text{K}^{-1}$)
Gypsum Board	805	0.292	977
Brick	1600	0.730	800
Glass wool	200	0.030	800
PVC, Silicon	2330	148	710.08
PVC, Glass	2500	1.7	780.33
Air, at 283K	1.2474	0.024840	1005.8
Air, at 288K	1.2257	0.025219	1005.9
Air, at 303K	1.1649	0.026341	1006.5

The initial conditions are constant for all cases as follows:

- Cooling case: solid temperature = 303 K, air gap temperature = 288K, air temperature= 283 K.
- Heating case: solid temperature = 283 K, air gap temperature = 288K, air temperature= 303 K.

I apply zero Neumann boundary conditions in all cases for the right, the top and the bottom boundary, which do not allow any heat transfer at those boundaries.

There are two types of incoming radiation: one of them is coming from outside of the studied system and it is independent of the temperatures in the system, thus I denote it by $q_{\text{from out}}^*$. The second type is coming from another part of the system and thus it is a time-dependent variable, which can be denoted by $q_{\text{from in}}^*$. At the left-hand side of the system, the conduction is neglected, but the wall loses heat by radiation and convection to the interior of the building, and also gain the appropriate heat, which are included into the heat generation term. The intensity of the

incoming radiation will be considered as a constant $q_{\text{from out}}^* = 400\text{W/m}^2$. The ambient temperature of the room is always $u_a = 293\text{K}$ which is considered as a comfortable temperature for a living space. The interior elements of the solid material cannot lose or gain heat by the heat convection, radiation, and heat source, only by conduction.

In case of free convection boundary the elements on the left and right sides in the interface between solid and fluid can transfer heat by convection and radiation with the values shown in Tables (4.9) [70]. I use realistic values for σ^* as it was explained above. The heat source generation contains a part of the solar radiation, with which I obtain the value of $q_{\text{from out}}^*$ as shown in table below. For the heat generation for the interface elements 1 and 2, I put (-) in the table because it receives $q_{\text{from in}}^*$ type radiation. The air ambient temperature (on the right side) is taken to be $30^\circ\text{C} \approx 303\text{K}$ in case of heating and $10^\circ\text{C} \approx 283\text{K}$ in case of cooling. Here interface 1 is the interface between the insulator and the air gap, and interface 2 is the interface between the PVC and airgap, while interface 3 is the interface between the PVC and the surrounding air.

Table 4.9. The heat convection, radiation, and source parameters on right and left sides of the wall elements

	$h \left(\frac{\text{W}}{\text{m}^2 \cdot \text{K}} \right)$	$\sigma^* \left(\frac{\text{W}}{\text{m}^2 \cdot \text{K}^4} \times 10^{-8} \right)$	$q_{\text{from out}}^* \left(\text{W} / \text{m}^2 \right)$
Left Elements	2	5	400
Interface 1 (insulator)	4	4	-
Air gap elements	4	0	0
Interface 2 (silicon)	4	4	-
Interface 3 (glass) sunny part	4	4	600
Interface 3 (glass) shaded part	4	4	100
Surrounding air elements	4	0	0

There is an air gap between the insulator and PVC, those two surfaces radiate each other with a $q_{\text{from in}}^*$ type radiation. The quantity of the radiative heat transfer changes with the temperature of each surface. In this case the heat generation (incoming heat) of the surface elements can be calculated as follows:

- For Interface elements 1: $q = \frac{\sigma^*}{c \rho \Delta x} \cdot u_{\text{Silicon}}^4 + \frac{h}{c \rho \Delta x} \cdot u_{\text{air_gap}}$.
- For air gap: $q = \frac{h}{c \rho \Delta x} \cdot u_{\text{air_gap}}$.
- For Interface 2: $q = \frac{\sigma^*}{c \rho \Delta x} \cdot u_{\text{Insulator}}^4 + \frac{h}{c \rho \Delta x} \cdot u_{\text{air_gap}}$.

While in case of forced convection, all the boundaries have the same expressions for heat transfer. However, the heat transfer coefficient in forced convection is not a constant but depends on air velocity which I take in the z direction. The convection coefficient h for the air elements depends on the nondimensional parameters Nu and Re , which derived based on the energy balance at thermal boundary layer of air (for more details see [71]). The procedure is as follows:

The heat transfer coefficient: $h = Nu \left(\frac{k}{L_z} \right)$, where L_z is the length of the surface in the z direction.

Nusselt number: $Nu = 0.664 Re^{1/2} Pr^{1/3}$

Reynolds number: $Re = \frac{\rho v L_c}{\mu}$, where v is the air velocity which is 0.5m/s and μ is the dynamic viscosity.

Prandtl number: $Pr = \frac{v}{\alpha} = \frac{\mu c_p}{k}$, I can get it from an air properties table.

For the forced convection the values of Reynolds Number Re are as follows:

- free-forced; the surrounding air moving at velocity $v=0.5\text{m/s}$, and $Re= 17596.95$ for cooling, $Re= 15589.9$ heating.
- forced-forced the air moving on both sides of the PVC at velocity $v=0.5\text{m/s}$, $Re= 17056.69$ for the air gap zone, $Re= 17596.95$ cooling, and $Re= 15589.9$ heating for surrounding air.

4.4.3. The Simulation Results

I applied the I.C and B.C of section 4.4.2 with $t_{fin} = 20,000\text{s}$, the cases of study in both cooling and heating in free and forced convection. The maximum errors are plotted in Figures 4.36– 4.38, where it can be seen that the DF and the hopscotch methods lose their advantage with respect to the PI method if there is forced convection in the air gap. The main reason of this is that there is a rapid heat exchange between the air and the inner surface of the PVC, which consists of silicon that has a large heat conductivity and this makes the required time step size smaller. Figures 4.39-4.42 show the contours of temperature distribution for the initial and final time step for both forced and free convection. Figure 4.43 shows the effect of air gap and that of forced convection in cooling down the PVC (silicon) layer.

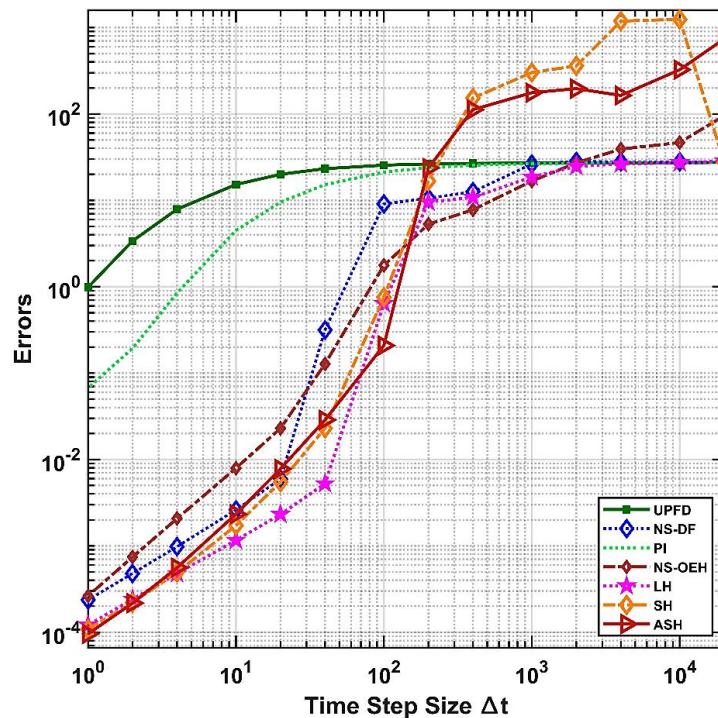


Figure 4.36. The maximum errors as a time step size function Δt for the 7 tested methods in the case free-free convection cooling in Case 3.

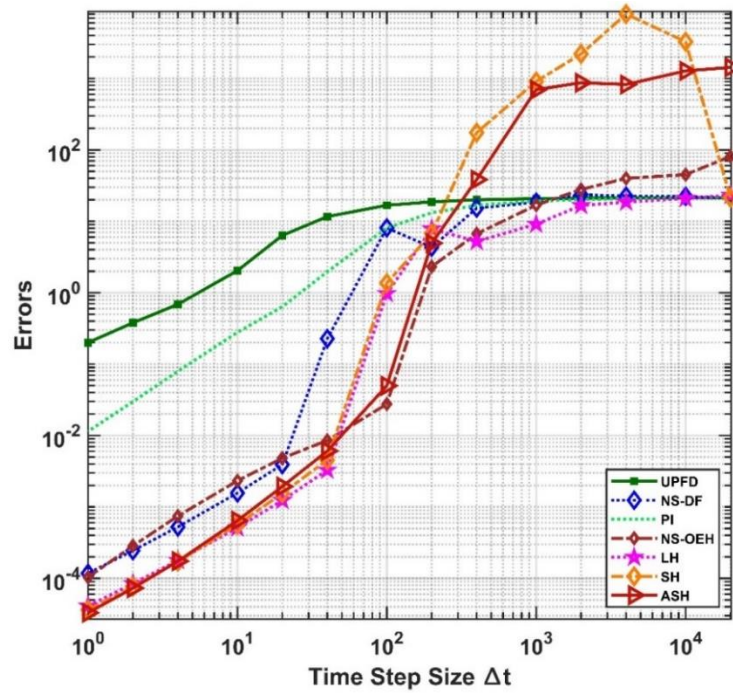


Figure 4.37. The maximum errors as a time step size function Δt for the 7 tested methods in the case of free-forced convection cooling in Case 3.

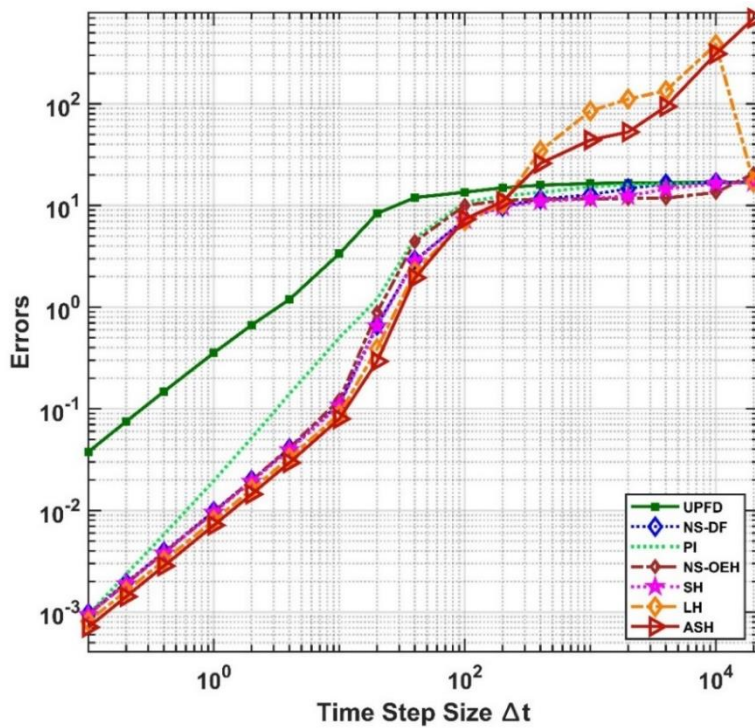


Figure 4.38. The maximum errors as a time step size function Δt for the 7 tested methods in the case of forced-forced convection cooling in Case 3.

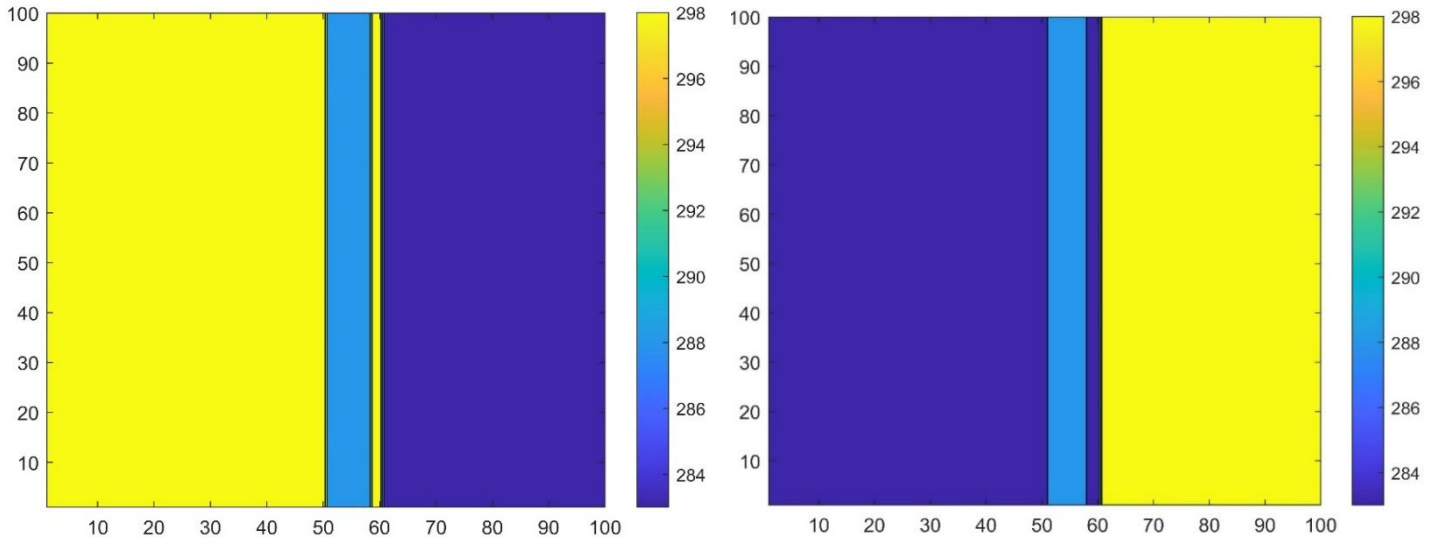


Figure 4.39. The contour of initial temperature distribution in Kelvin for free and forced convection in Case 3, in case of Cooling (left), and Heating (right).

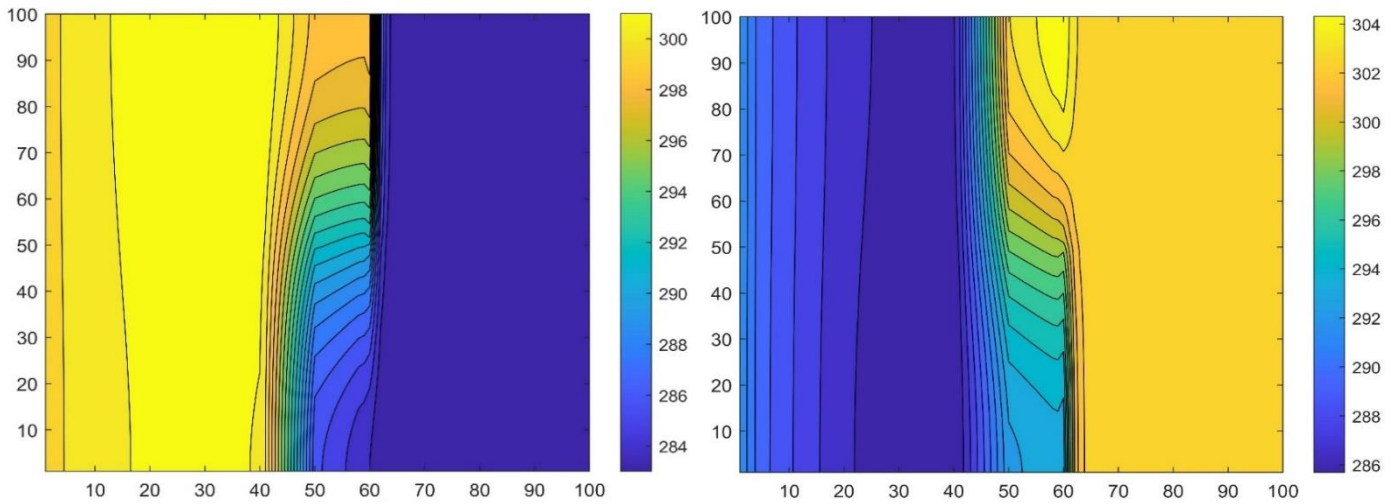


Figure 4.40. The contour of final temperature distribution in Kelvin for free-free convection in Case 3, in case of Cooling (left), and Heating (right).

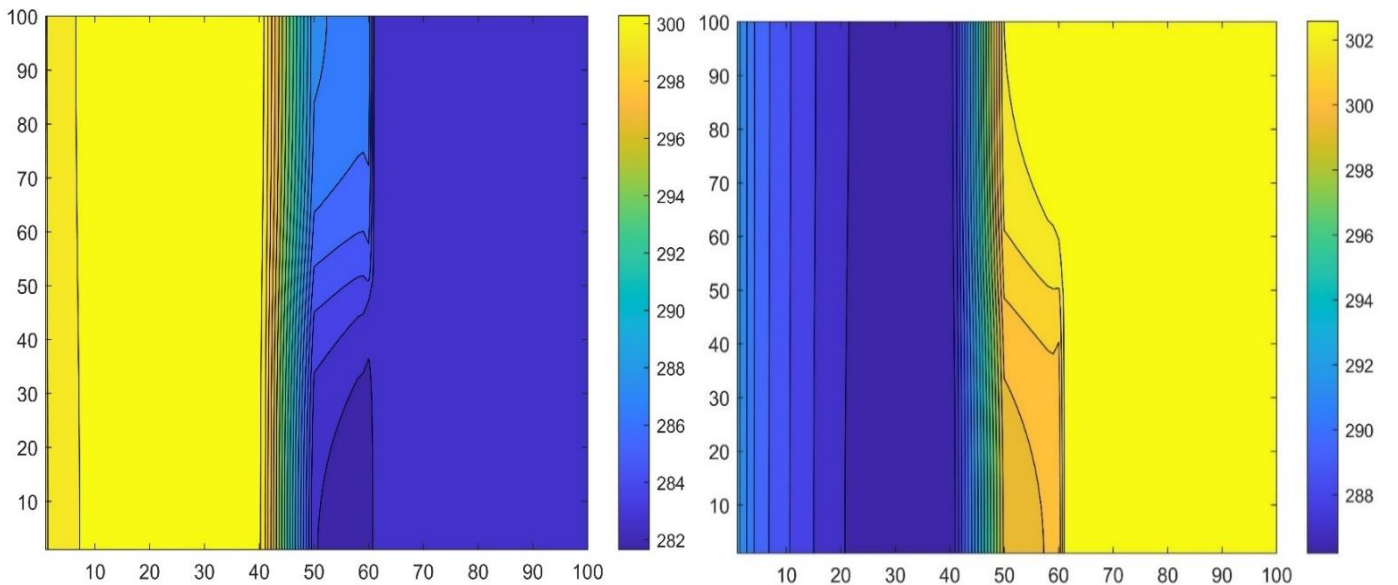


Figure 4.41. The contour of final temperature distribution in Kelvin for free-forced convection in Case 3, in case of Cooling (left), and Heating (right).

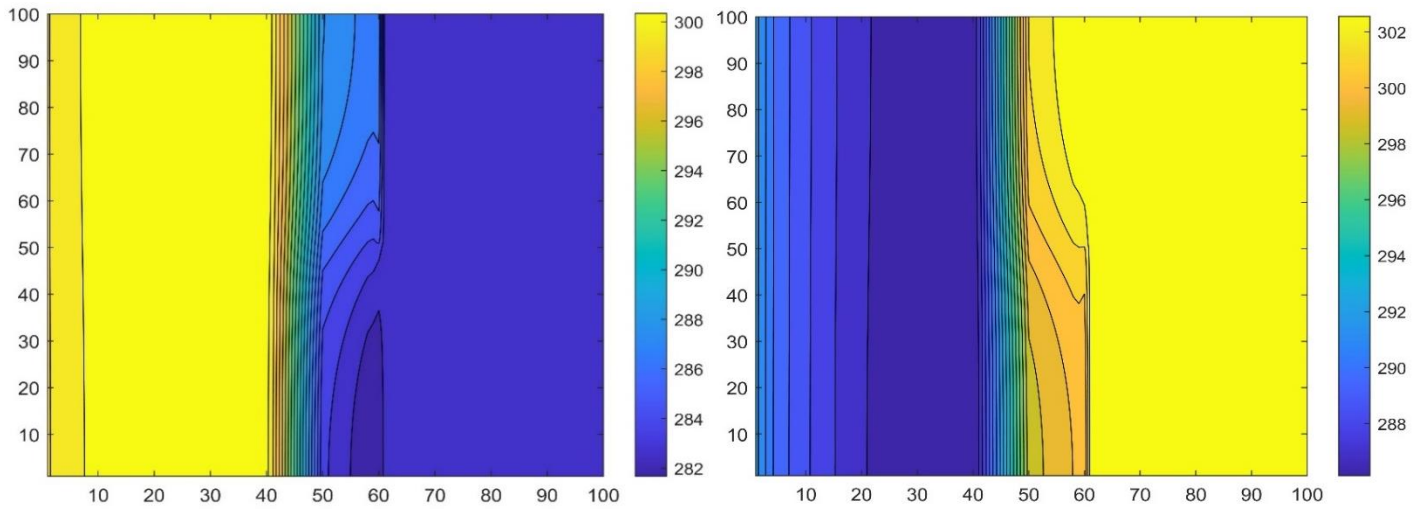


Figure 4.42. The contour of final temperature distribution in Kelvin for forced-forced convection in Case 3, in case of Cooling (left), and Heating (right).

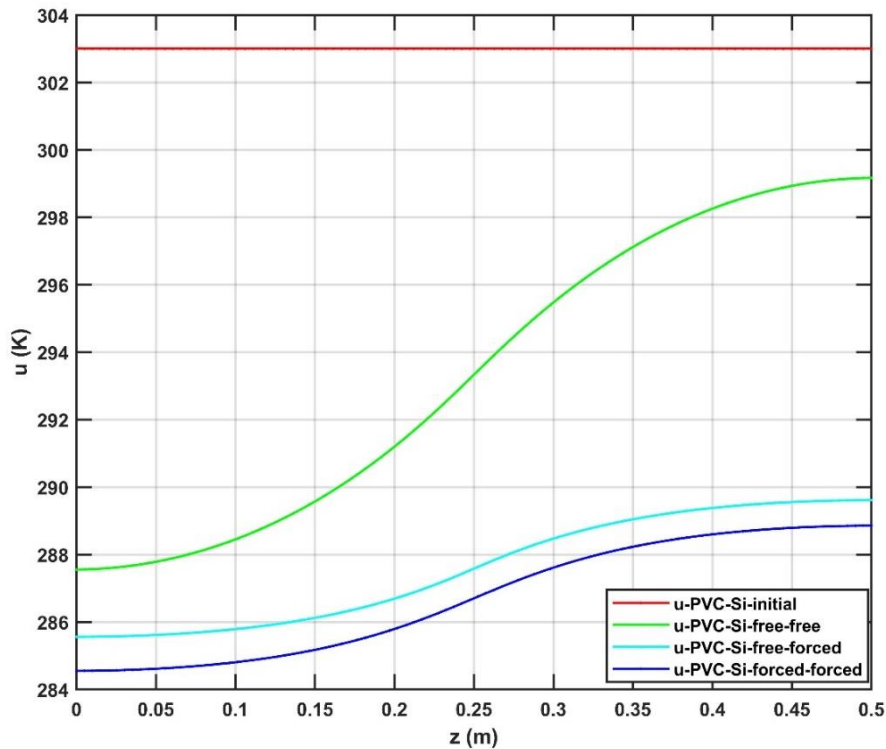


Figure 4.43. The temperature at the PVC (silicon) border in Kelvin for Case 3 in case of Cooling

4.4.4. The Summary of The Present Section

I numerically studied transient heat transfer in the form of conduction, convection, and radiation in two-dimensional systems of gypsum board, brick, glass wool, air gap, PVC, and air. I used seven stable numerical algorithms for this purpose. The ode15s MATLAB routine served with the reference solution in all examined cases.

The tested methods' advantages and disadvantages are listed in the following:

1. The UPFD is first order of magnitude, and generally not accurate enough, but it can treat convection and radiation terms very well. For arbitrary time-step size it is positivity preserving, all others methods are not. However, it is by far the least accurate for medium and small-time step sizes.
2. The Hopscotch family (NS-OOEH, SH, LH, and ASH), the NS-DF, and the pseudo-implicit methods are second order, but this latter one is usually much less accurate due to the extra terms in its truncation error.
3. The LH is typically the most efficient algorithm to handle these kinds of problems. However, when there is a forced convection in the air gap, the LH as well as other accurate methods lose most of their advantage and the PI method can also be effectively used.
4. The current algorithms successfully deal with very stiff systems, thus they are expected to be able to cope with any kind of materials or boundary conditions.

To conclude, the LH, ASH, and NS-DF algorithms can be proposed to solve these problems. All of them give very accurate results with tremendously larger time step sizes, thus they are faster than the standard explicit methods plagued by instability.

The conclusions from the engineering point of view are the following:

5. The used insulator at the outside of the brick prevent the heat to penetrate inside and, in this way, I keep the inside environment with comfort limit.
6. The heat transfer in convection and radiation can be controlled at the boundary by applied forced convection.
7. The forced convection heat transfer has significant effect to improving the heat transfer specially in case of cooling to cool down the PVC, which has a performance temperature limit to work in.
8. The temperature of the PVC exposed to sunshine is reduced significantly even by a light wind.
9. The used air gap between the PVC and insulator reduces the temperature at the insulator border and the PVC borders.

Related to the wall construction I could recommend using both the insulator and the air gap to reduce the heat going inside the building due to hot weather and strong sunshine.

4.5. Calculate The Heat Transfer in Building Walls with Phase Change Materials Using Effective Heat Capacity Model

I employ efficient explicit numerical methods, and validate my approach against established mathematical expressions and models in the literature. My research investigates various building wall geometries and boundary conditions, primarily focusing on employing the Effective Heat Capacity model to manage heat loads. The objective is to maintain interior temperatures within comfort zones. I compare two types of paraffin wax PCMs. The first one is characterized by a lower melting temperature and higher latent heat capacity, thus it can efficiently store external heat when combined with brick or concrete.

4.5.1. Theory and Considerations of the Present Study

I perform the thermal analysis of PCM integrated with building components by using the effective heat capacity (EHC) model with two phases (solid: So and liquid: Li). It implies that the specific heat c , the heat conductivity k , and the density ρ depend on not only the space (due to material inhomogeneities) but on the temperature itself. In one dimension, the following PDE, the heat conduction equation can be used to predict the behaviour of the temperature:

$$\frac{\partial u}{\partial t} = \frac{1}{\rho(x, u)c(x, u)} \nabla(k(x, u)\nabla u) + q. \quad (4.10)$$

To determine the heat capacity of the cell, I consider two types of heat capacity: sensible heat capacity (SHC) and latent heat capacity (LHC). Standard materials, such as brick and concrete, which cannot change their phase in normal conditions have only sensible heat capacity. For phase change materials (PCMs), the EHC is computed as the sum of SHC and LHC at each phase, while taking phase transitions into account, as follows:

$$C_i^{So} = c_i^{So} \rho_i^{So} V_i, \text{ and } C_i^{Li} = c_i^{Li} \rho_i^{Li} V_i. \quad (4.11)$$

Those represent the SHC for liquid and solid state of material.

For the EHC, I define g as the Gaussian function[72] centered at the melting temperature u_{cr} of material with the standard deviation σ :

$$g(i) = \frac{1}{\sigma \sqrt{2\pi}} \exp\left(\frac{-(u_i - u_{cr})^2}{2\sigma^2}\right). \quad (4.12)$$

At the phase transition region $u_{cr} - \sigma \leq u \leq u_{cr} + \sigma$, I used the following functions to represent the thermal properties:

$$k_i = \frac{\left(\left(k_i^{Li} - k_i^{So}\right)\left(u_i - u_{cr}\right) + \sigma\left(k_i^{Li} + k_i^{So}\right)\right)}{2\sigma}, \quad (4.13)$$

$$\rho_i = \frac{\left(\left(\rho_i^{Li} - \rho_i^{So}\right)\left(u_i - u_{cr}\right) + \sigma\left(\rho_i^{Li} + \rho_i^{So}\right)\right)}{2\sigma}, \quad (4.14)$$

$$c_i = \frac{\left(\left(c_i^{Li} - c_i^{So}\right)\left(u_i - u_{cr}\right) + \sigma\left(c_i^{Li} + c_i^{So}\right)\right)}{2\sigma}, \quad (4.15)$$

where c is the specific heat capacity of the material and it depends on the material's state (solid, mixed solid and fluid, and liquid) and I used to calculate the sensible heat capacity as shown in the following equations. These functions are linear in the temperature variable and continuous in all of the parameters.

At the phase transition I used EHC as follow:

$$EHC_i = SHC_i + LHC_i, \quad (4.16)$$

$$SHC_i = c_i \rho_i V_i, \quad (4.17)$$

$$LHC_i = H_i g_i \rho_i V_i. \quad (4.18)$$

All quantities calculated by equations (4.11-4.18) are updating at each time step and at each stage contributing to the overall time consumption of the calculations. In Figure 4.44, there are some plotted examples of Gaussian function at different σ values and $u_{cr}=320$ K.

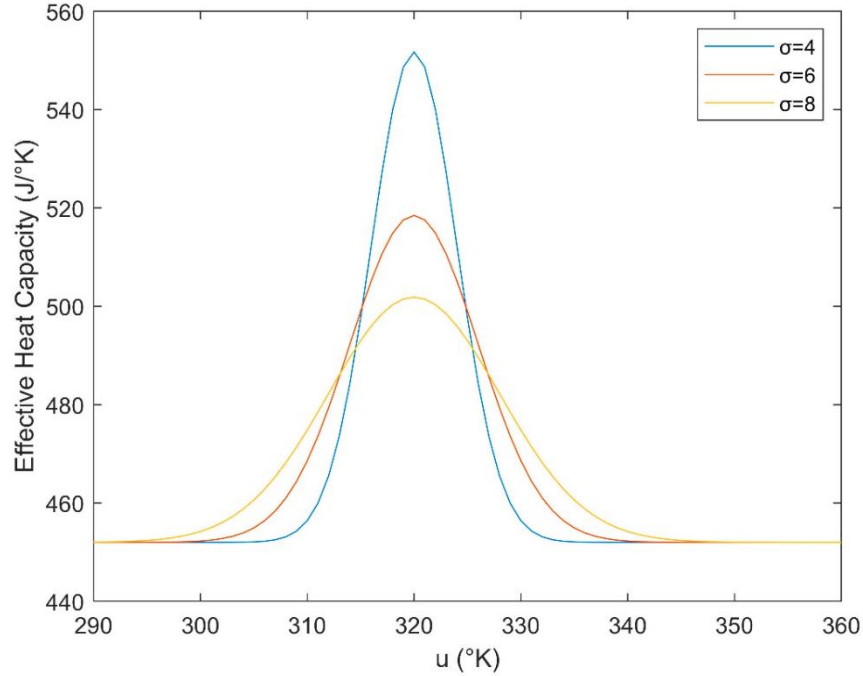


Figure 4.44. Gaussian function representative of the heat capacity with temperature

Keeping in mind the above-mentioned considerations, the time-development of the temperatures can be calculated by solving the system of ordinary differential equation (ODE):

$$\frac{du_i}{dt} = \sum_{j \neq i} \frac{u_j - u_i}{R_{i,j} C_i} + q_i , \quad (4.19)$$

which is the spatially discretized form of the nonlinear heat equation. After the temperatures are calculated, the total heat Q_T , sensible heat Q_{Se} and total latent heat Q_{La} of thermal systems can be given as follow:

$$Q_T^t = Q_T^{t-1} + \sum_{i=1}^N EHC(u_i^t - u_i^{t-1}) , \quad (4.20)$$

$$Q_{Se}^t = Q_{Se}^{t-1} + \sum_{i=1}^N SHC(u_i^t - u_i^{t-1}) , \quad (4.21)$$

$$Q_{La}^t = Q_{La}^{t-1} + \sum_{i=1}^N LHC(u_i^t - u_i^{t-1}) . \quad (4.22)$$

Here t is the index of the time level after the discretization of the time variable, which will be explained later. Those data measure the ability of PCM to store the energy during the phase transition that has the advantage to reduce the energy consumption in the building and keeping the comfort indoor temperature. From this point of view, I also calculate the cooling load in term of total heat transfer from outside to inside (x direction) as follow:

$$Q_{Cooling}^t = Q_{Cooling}^{t-1} + \frac{\Delta t (u_2 - u_1)}{R_1}, \quad (4.23)$$

where u_1 and u_2 are the first and second cells of internal surface layers respectively, thus they approximate well the heat transfer from the room to the wall and outside.

4.5.2. The 1D Analytical Solution

In the current section, I explain the heat transfer in a phase change material by using Stefan-type problems which have an explicit analytical solution [73]. The Paraffin wax PCM with properties shown in Table 4.10 is inside the container. Within this setup, a Paraffin wax slab, presumed to possess a semi-infinite length along the x -axis. The boundary condition (BC) is zero-Neumann (insulated) on all boundaries except the left side ($x=0$), where it is Dirichlet BC with constant temperature (u_{face}). This allows the heat to flow into or out of the system, which therefore undergoes the melting or solidification process from the left side toward the right, as shown in Figure 4.45. The thermal conductivity is the same for the solid and liquid states of the PCM. The interaction between the solid and fluid components depends upon the applied temperature and exposure duration. Consequently, temperature calculations are determined by the specific region within the body.

Table 4.10. The Paraffin wax PCM1 properties [73].

Material	ρ (kg·m ⁻³)	k (W·m ⁻¹ ·K ⁻¹)	c (J·kg ⁻¹ ·K ⁻¹)	Latent Heat (J·kg ⁻¹)
PCM _{Solid}	856	0.15	2210	247000
PCM _{Liquid}	778	0.15	2010	

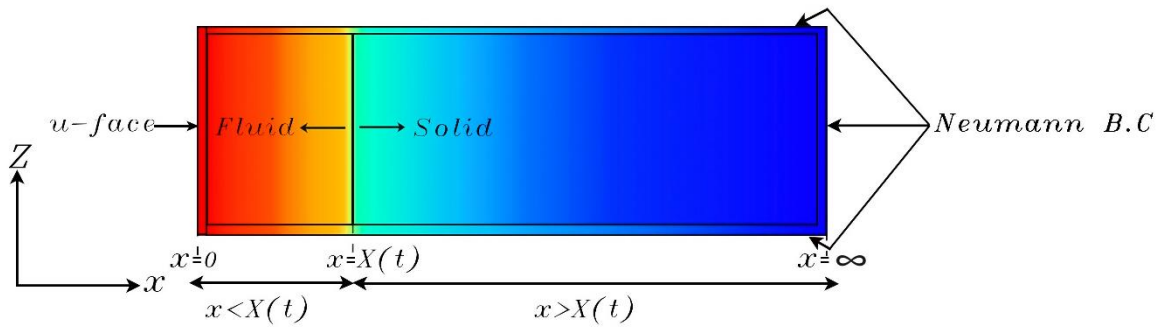


Figure 4.45. The paraffin wax inside the container

The PCM initially has a temperature u_0 , and has a melting or solidification temperature u_{cr} , where:

$$u_{face} > u_{cr} > u_0$$

in case of melting with initially solid PCM, and

$$u_{face} < u_{cr} < u_0$$

in case of solidification with initially liquid PCM.

The location of phase interaction between liquid and solid at time t is $x = X(t)$

$$X(t) = 2\lambda\sqrt{\alpha_L t} . \quad (4.24)$$

The temperature $u(x,t)$ of the liquid zone, where $0 < x < X(t)$, is

$$u(x,t) = u_{face} + \frac{u_{cr} - u_{face}}{\text{erf}(\lambda)} \text{erf}\left(\frac{x}{2\sqrt{\alpha_L t}}\right) , \quad (4.25)$$

while the temperature of solid zone $x > X(t)$

$$u(x,t) = u_0 + \frac{(u_{cr} - u_0) - (1 - \text{erf}\left(\frac{x}{2\sqrt{\alpha_L t}}\right))}{1 - \text{erf}\left(\lambda \frac{\alpha_L}{\alpha_s}\right)} . \quad (4.26)$$

Here λ is the root of the transcendental equation

$$\frac{e^{-\lambda^2}}{\text{erf}(\lambda)} - \frac{k_S\sqrt{\alpha_L}(u_0 - u_{cr})}{k_L\sqrt{\alpha_S}(u_{cr} - u_{face})} \frac{e^{-\alpha_L\lambda^2/\alpha_s}}{(1 - \text{erf}(\lambda\sqrt{\alpha_L/\alpha_s}))} = \frac{\lambda H}{c_L} \frac{\sqrt{\pi}}{(u_{face} - u_{cr})} . \quad (4.27)$$

The total heat transfer into the system by the time t can be calculated by:

$$Q_T(t) = \int_0^t q(t) dt = \frac{2k_L(u_{face} - u_{cr})\sqrt{t}}{\sqrt{(\alpha_L\pi)} \text{erf} \lambda} . \quad (4.28)$$

The total heat latent through the melting process:

$$Q_{La}(t) = \rho_{La}HX(t) . \quad (4.29)$$

Then the sensible heat is the difference between the total heat input and the latent heat

$$Q_{Se}(t) = Q_T(t) - Q_{La}(t) . \quad (4.30)$$

4.5.3. Geometry and Mesh Generation

In the current work, I have conducted multiple geometries study focused on thermal analysis. The primary structural elements of the buildings under investigation predominantly consist of brick walls and concrete roofs, or both concrete walls and roofs in the case of precast construction. Additionally, I have integrated a PCM layer on the exterior surfaces of both the walls and roofs to enhance their thermal properties, as shown in Figure 4.46.

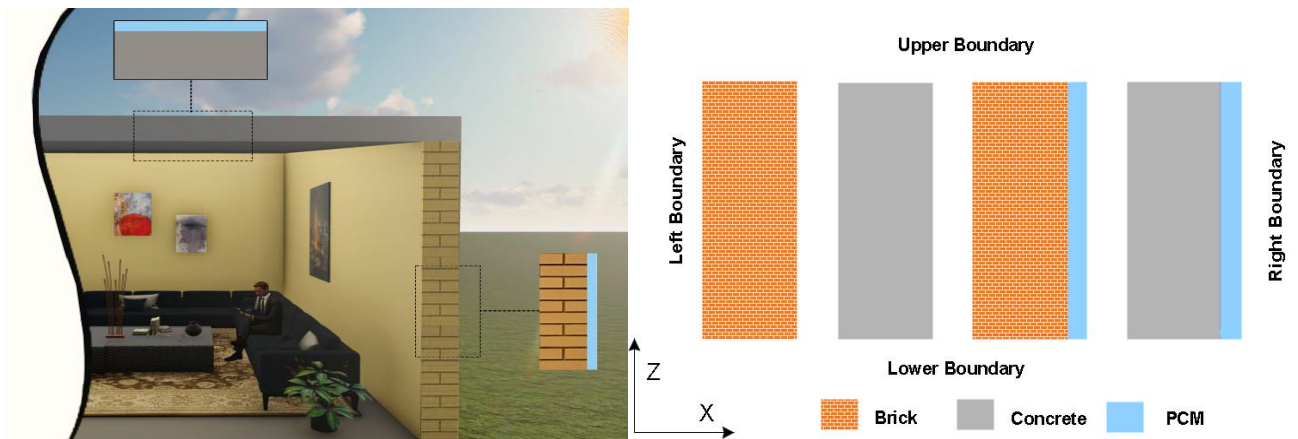


Figure 4.46. The selected section geometries of studies

The value of mesh spacing will be $\Delta x = 3.334 \times 10^{-4}$ in all cases. It has been selected based on the mesh dependency study, whose details will be provided in Section 4.5.5.1.2. For brick and concrete, I consider a wall segment with a cross section area $Area = L_x \times L_z$ with value $0.2 \text{ m} \times 0.1 \text{ m}$. I set $(x, z) \in [0, 0.2] \times [0, 0.1]$, thus the meshes total area is 0.02 m^2 . The number of the cells along the x and z axes are set to $N_x = 600$ and $N_z = 1$, thus, I have a mesh with a total cell number $N = N_x N_z = 600$. For the other cases I consider a wall segment with a cross section area $Area = L_x \times L_z$ with value $0.25 \text{ m} \times 0.1 \text{ m}$, where 0.2 the wall thickness and 0.05 the PCM layer thickness. $(x, z) \in [0, 0.25] \times [0, 0.1]$, thus the meshes total area is 0.025 m^2 . I have constructed an equidistant grid for all cases. The number of the cells along the x and z axes are set to $N_x = 750$ and $N_z = 1$, thus, I have a mesh with a total cell number $N = N_x N_z = 750$.

4.5.4. Materials and Boundary Conditions

Table 4.11 displays the material properties utilized in my current study, which primarily consist of structural materials like brick and concrete, with properties shown in Table 4.12. Meanwhile, I used two types of PCM, both of them is a kind of Paraffin wax. The first one is PCM1 [73] with properties shown in Table 4.11 and melting temperature 309.7 K , and the second one is PCM2 [4] with properties shown in Table 4.12 and melting temperature 313 K , and with standard deviation $\sigma=1$ for both kinds of PCMs. I chose these two kinds of PCM due to the high environment temperature outside which needs the PCMs have high melting temperature (the time of temperature exposing range is high) and high latent heat properties.

Table 4.11. The Structural Materials Properties.

Material	$\rho (\text{kg} \cdot \text{m}^{-3})$	$k (\text{W} \cdot \text{m}^{-1} \cdot \text{K}^{-1})$	$c (\text{J} \cdot \text{kg}^{-1} \cdot \text{K}^{-1})$
Brick	1600	0.73	800
Concrete	2300	1.70	840

Table 4.12 The Paraffin wax PCM2 with following Properties.

Material	$\rho (\text{kg} \cdot \text{m}^{-3})$	$k (\text{W} \cdot \text{m}^{-1} \cdot \text{K}^{-1})$	$c (\text{J} \cdot \text{kg}^{-1} \cdot \text{K}^{-1})$	Latent Heat ($\text{J} \cdot \text{kg}^{-1}$)
PCM _{Solid}	830	0.48	2210	190000
PCM _{Liquid}	878	0.22	2300	

I used a linear relation to calculate the initial temperature by applying the recorded temperature at each one-hour taken by a weather-forecast website [74], for Basra-Iraq city on the 25 of August and on the 25 of September shown in Table 4.13 and Table 4.14 on different days (day1 is Case 1, and day2 is Case 2). I used linear relation of temperature changing with time to get the temperature distribution matrix:

$$u(x, z, t = 0) = \text{Matrix values}$$

I applied different BCs on different sides. On the upper and lower sides, I applied Neumann boundary conditions in all cases:

$$u_z(x, z = 0, t) = u_z(x, z = L_z, t) = 0$$

On the left side I applied Dirichlet BC with constant temperature which represented the interior comfort temperature with value equal to 298 K:

$$u_x(x = 0, z, t) = 298$$

On the right side I applied Dirichlet BC, by applying the same recorded temperature that I used to calculate the initial temperature to get the right boundary temperature distribution array:

$$u_x(x = L_x, z, t) = \text{Array values}$$

Table 4.13 The Right Boundary Temperatures in Case1.

Time/h	1	2	3	4	5	6	7	8	9	10	11	12
u _{Right} /K	309	308	307	306	305	304	303	305	307	310	311	313
Time/h	13	14	15	16	17	18	19	20	22	22	23	24
u _{Right} /K	314	316	317	316	316	314	313	311	310	309	308	308

Table 4.14 The Right Boundary Temperatures in Case 2.

Time/h	1	2	3	4	5	6	7	8	9	10	11	12
u _{Right} /K	302	300	298	297	296	297	299	304	308	313	315	316
Time/h	13	14	15	16	17	18	19	20	22	22	23	24
u _{Right} /K	317	318	318	317	316	313	311	309	308	307	306	305

So, with these two cases and different scenario I simulated the wall section with 24 subcases, as shown in Table 4.15.

Table 4.15. Subcases for each Main Case (day)

Left Dirichlet Boundary
Brick
Concrete
Brick+PCM1
Concrete+PCM1
Brick+PCM2
Concrete+PCM2

4.5.5. The Results of Current Study

4.5.5.1. The numerical methods verification with two steps for PCM

4.5.5.1.1. First Step of Verification

In the initial verification step, I validated the numerical methods by employing the analytical solution given in Eqs. (4.24), (4.25), and (4.26). To use the analytical solution, one needs to solve the complicated transcendental equation (4.27). To enable myself to change the parameters, I first analytically reproduced that solution, but it could be done by some small error. This error, i.e. the difference between the literature and my analytical values, is much smaller

than the difference between the exact analytical and approximate solution used in the literature [73], as one can see in Table 4.16.

The system considered was one-dimensional, with the height of the geometry as well as the corresponding space step set to unity. The key parameters for the solution were as follows:

$$L_x = 1, L_z = 1, N_x = 3000, N_z = 1, N = 3000, \Delta x = 0.00033, \Delta z = 1, u_0 = 294, u_{cr} = 309.7, u_{face} = 368$$

$$\alpha_L = 9.59 \times 10^{-8}, \alpha_s = 7.92 \times 10^{-8}, t_0 = 0, t_{fin} = 3600.$$

The result I got by solving equations (4.24), (27), (28), (29) and (30) are shown in Table 4.16, while the results for the verification of the numerical methods with small time step size $\Delta t = 0.036s$ are shown in Table 4.17.

Table 4.16. The results of verification.

Parameters	Present Analytical values	Present Numerical values	Literature Analytical Values [11]	Literature Approximate Values [8]
λ	0.4037	-	0.4033	0.42
$X(t) \ m$	1.5×10^{-2}	1.5×10^{-2}	1.5×10^{-2}	1.56×10^{-2}
$Q_T(KJ / m^2)$	4426.6	4459.7	4446	4252
$Q_{La}(KJ / m^2)$	2882.6	2977	2883	2998
$Q_{Se}(KJ / m^2)$	1544	1482.6	1563	1254

Table 4.17. The results of the verification of the numerical methods.

Parameters	Explicit	ASH	SH	LH
$X(t) \ m$	1.5×10^{-2}	1.5×10^{-2}	1.5×10^{-2}	1.5×10^{-2}
$Q_T(KJ / m^2)$	4459.701	4459.704	4459.706	4459.708
$Q_{La}(KJ / m^2)$	2977.010	2977.012	2977.013	2977.014
$Q_{Se}(KJ / m^2)$	1482.690	1482.692	1482.693	1482.694
<i>MaxError</i>	1.0580	1.0576	1.0579	1.0582

I calculated the maximum error (maximum absolute temperature differences along the x -axis between the analytical reference solution and the numerical solution) depending on the time step size. As shown in the table above, the current values are closed enough to the literature values, which means I successfully verified the numerical methods based on the literature. The results of the used four numerical algorithms are very close to one another, thus the deviation from the analytical values are mostly the consequence of the discretization and the EHC model.

The errors are presented in Figure 4.47. It is evident that all numerical methods exhibit an acceptable accuracy in handling PCM scenarios. This outcome instills confidence in my ability to address similar heat-related challenges in future endeavors [75].

In Figure 4.48, temperature values along the x -axis are depicted with a focused view on the transient phase zone for both the analytical result and the numerical methods (Explicit, ASH, SH, and LH). Remarkably, the values align closely, with differences seldom exceeding 1 degree.

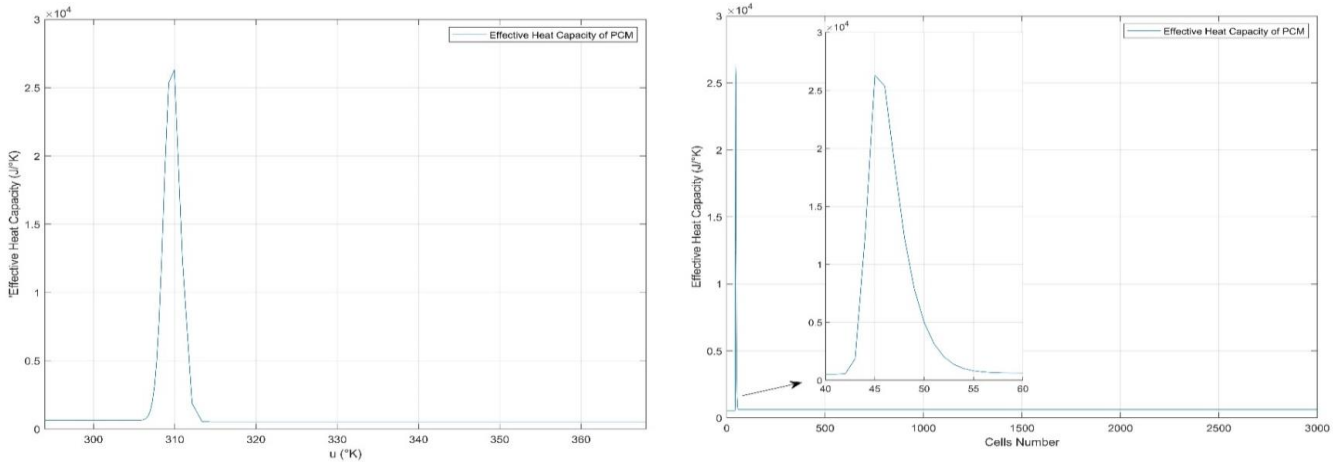


Figure 4.49. The EHC for Paraffin wax slab plotted with the final temperature u (left) and with $Cell\ Number$ (right).

4.5.5.1.2. Second Step of Verification

In the second phase of verification, the explicit method was employed as a reference solution, serving as a benchmark to evaluate other numerical methods. This comprehensive assessment aimed to measure mesh dependency, time dependency, and validate the applicability of a new PCM. Mesh dependency was scrutinized to understand the impact of mesh size on result accuracy. Following extensive analysis, an optimal mesh size of 3000 elements was identified, as demonstrated in Figure 4.50, and was subsequently applied across all study cases.

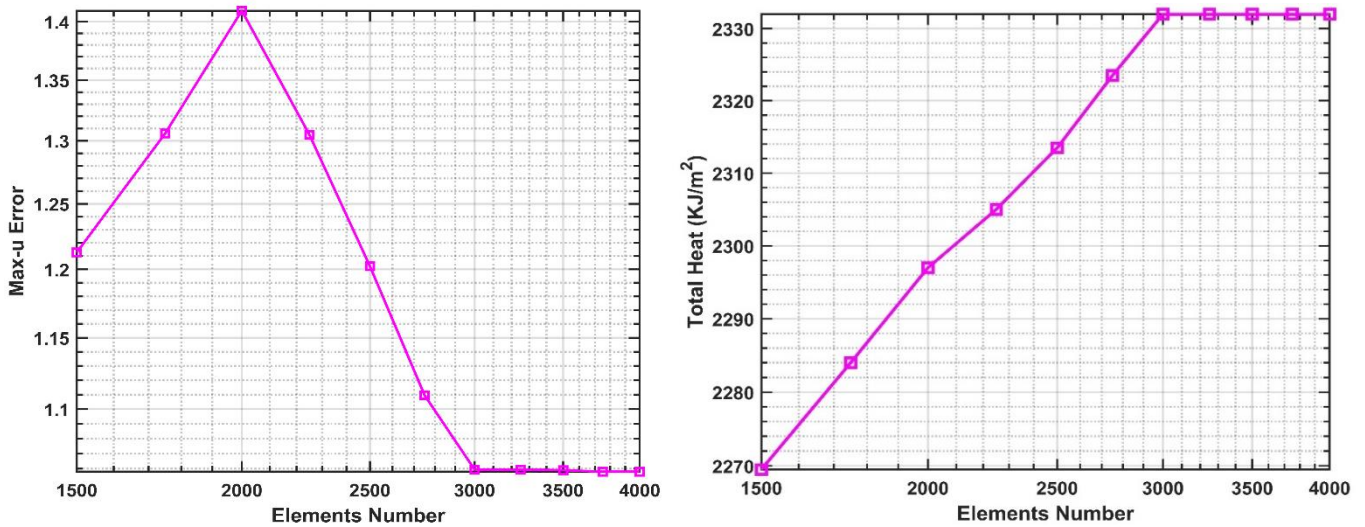


Figure 4.50. The mesh dependency examination, number of mesh elements with max error (Left), and with total penetrated heat (Right)

Regarding time discretization dependency, meticulous analysis was conducted to select an appropriate time step size to meet stringent engineering precision standards, which corresponds to errors less than 10^{-2} . As illustrated in Figure 4.51 (Left), a time step size of $\Delta t=0.86s$ is enough and it is implemented across all ongoing study cases.

In addition, a secondary verification step was undertaken for the new PCM material within the same computational framework, conditions and system scales. Remarkably, Figure 4.51 (Right) illustrates the maximum error over time step size, displaying striking similarities to curves associated with the other PCM material depicted in Figure 4.51 (Left). This observation underscores the versatility of the numerical methods within my updated framework, making them highly effective for various types of PCM materials, irrespective of their specific properties or the boundary conditions.

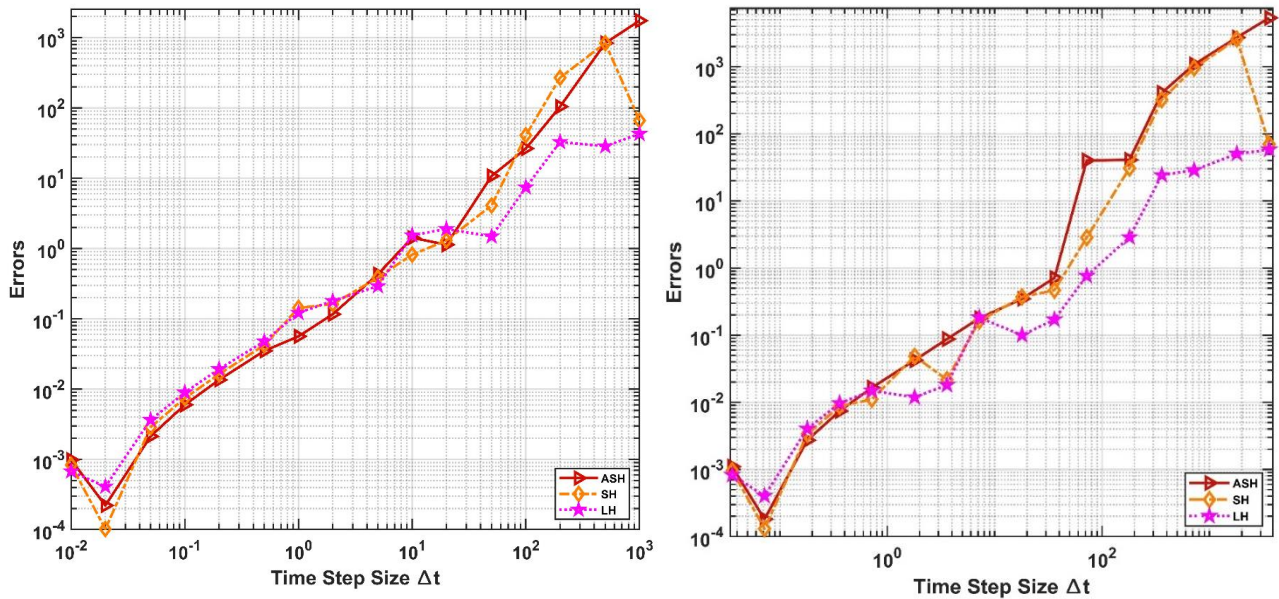


Figure 4.51. The maximum error as a function of time step size of three numerical methods for PCM1 (Left), and for PCM2 (Right).

4.5.5.2. The Simulation Results

In this section, I present the results of my study in terms of total heat, heat storage, and heat transfer from the outside to the inside. These factors signify the cooling load or the amount of heat that needs to be removed using electric devices or other methods to maintain the interior environment at a comfortable zone temperature, set at 298 K. Figures 4.52-4.60 displays the results of Case 1 and Case 2 using two types of PCMs. In Figure 4.52 and 4.53 I provide samples of Effective Heat Capacity (EHC), Latent Heat Capacity (LHC), and Sensible Heat Capacity (SHC) plotted along the x -axis for the comparison of walls made of brick and PCMs. These graphs illustrate the behavior of melting and the storage heat hump. Similar results were obtained for concrete and PCMs. Due to the consistency in behavior across various cases, additional figures are unnecessary. Instead, I have compiled the data, including total, latent, and sensible heat values, in Tables 4.18-4.21 for reference and further analysis.

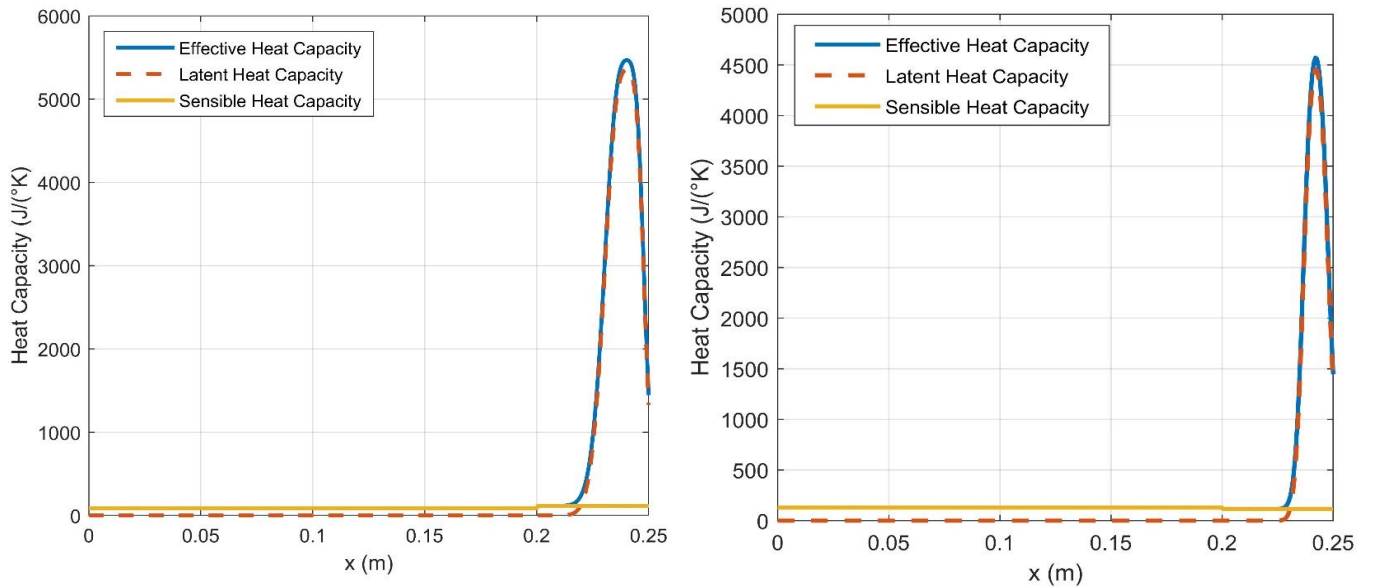


Figure 4.52. The heat capacity in Case1 for of Brick+PCM1 (Left), Concrete +PCM1 (Right)

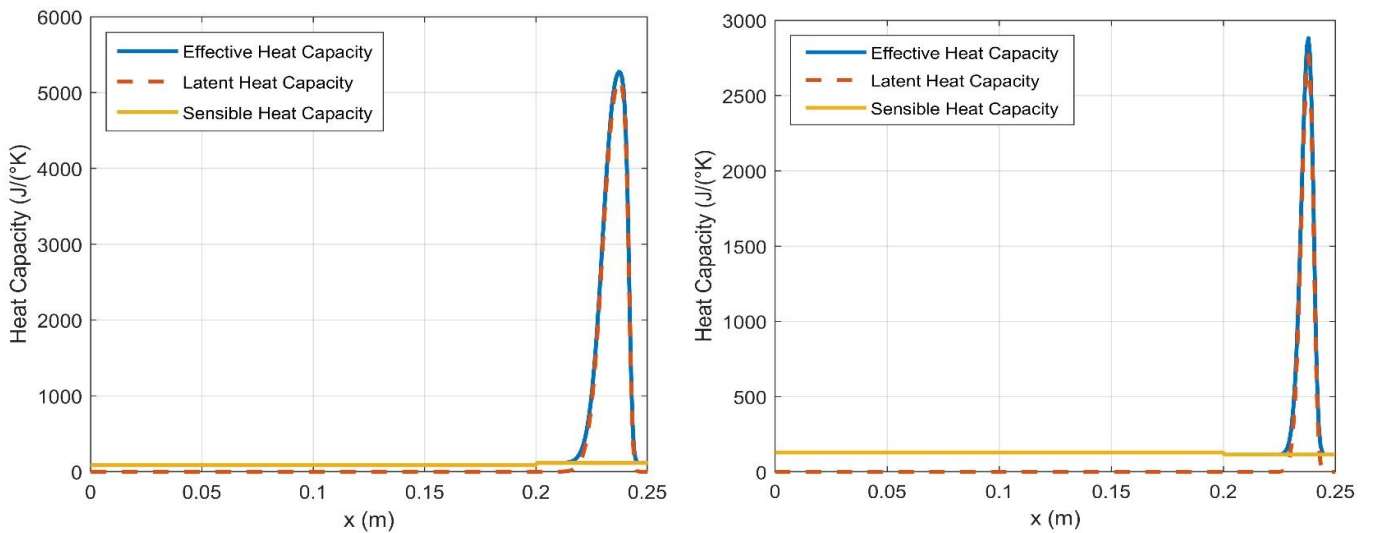


Figure 4.53. The heat capacity in Case of Brick+PCM2 (Left), Concrete +PCM2 (Right)

Figure 4.54 illustrates samples of the effective heat capacity history plotted at selected points through the PCM ($x=0.246$, 0.233 , and 0.2166 m) to allow the reader understanding the mechanism of heat saving during the phase transition which considering as a latent heat.

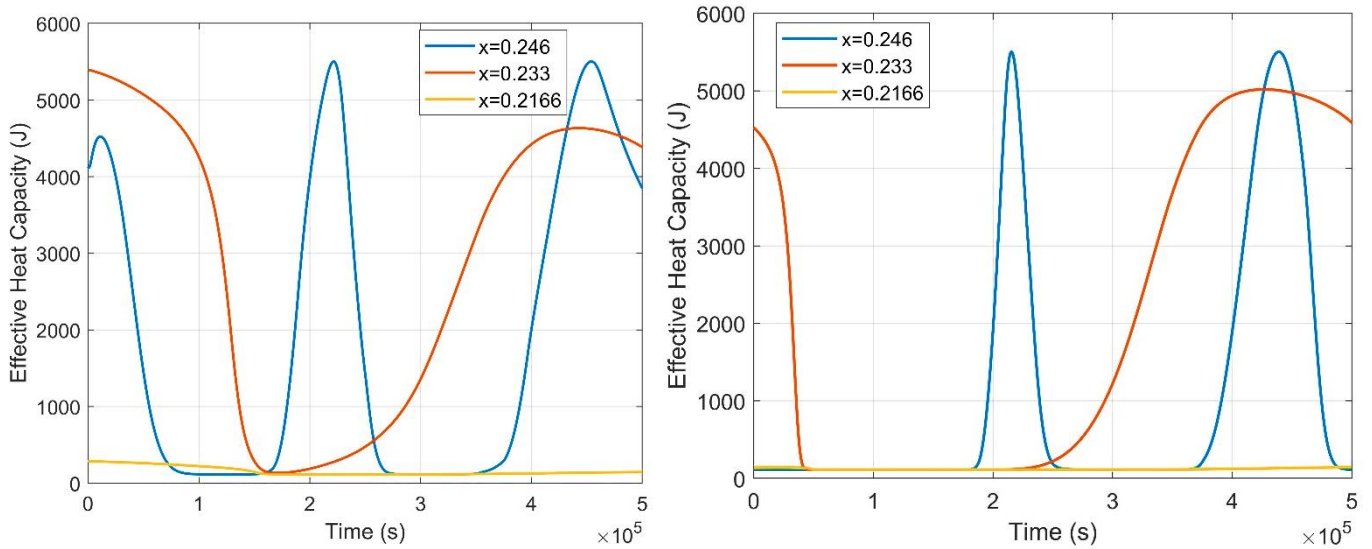


Figure 4.54. The Effective Heat Capacity history through PCM for Brick+ PCM1 in Case1 (Left), and Case2 (Right).

Figures 4.55 and 4.56 illustrate the temperature history profiles at the middle of brick part of the wall. I can notice that the construction wall without PCM the temperature profile follows the outdoor temperature profile (applied boundary) with a small-time delay which represent the time of heat transfer against place. The utilization of PCM1 demonstrates a remarkable effect in maintaining the interior temperature close to comfort zone temperature and the initial values (308 K and 302 K) [76]. This indicates that a significant portion of the heat originating from the outside is efficiently stored inside PCM1 in the form of latent heat. Conversely, in the case of PCM2, the storage of heat is not as efficient due to its higher melting temperature (313 K) compared to the maximum applied temperature (317 K). Additionally, the latent heat capacity of PCM2 is considerably lower than that of PCM1. Consequently, a portion of the heat from the outside transfers indoors, leading to a noticeable impact on the indoor temperature.

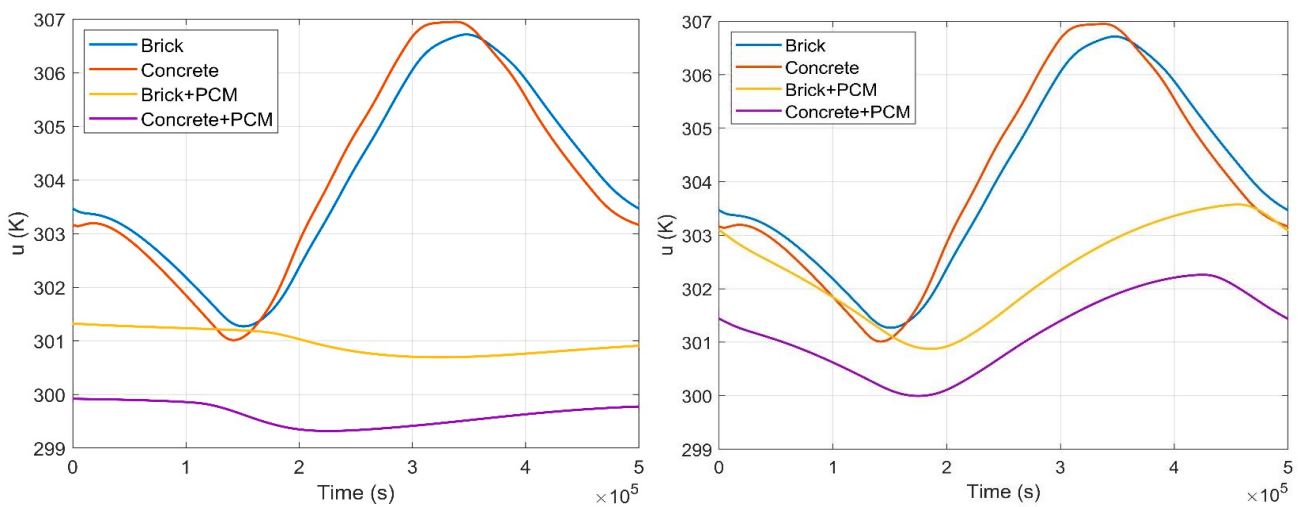


Figure 4.55. The temperature history in the middle of brick or concrete part in Case1 with PCM1 (Left), PCM2 (Right)

USE EFFICIENT METHODS TO SOLVE REAL-LIFE HEAT TRANSFER PROBLEMS

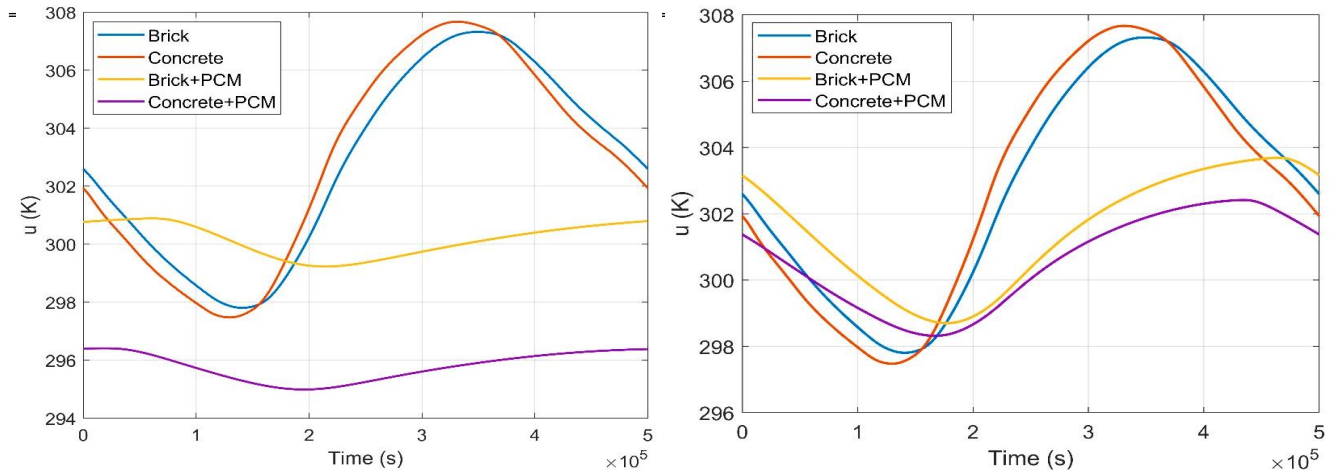


Figure 4.56. The temperature history in the middle of brick or concrete part in Case2 with PCM1 (Left), PCM2 (Right)

Figures 4.57 and 4.58 depict the instantaneous total heat transfer observed throughout the duration of the study for both cases involving PCMs. These figures highlight a significant disparity in heat transfer between concrete and brick. Notably, the majority of this energy is directed inward, contributing to the interior environment. The influence of PCM usage on energy storage during the melting process is evident. However, it is essential to note that this increase in heat transfer does not imply that all of this energy directly infiltrates the interior space. A substantial portion of this heat is retained within the PCM during the transition phase, primarily in the form of latent heat.

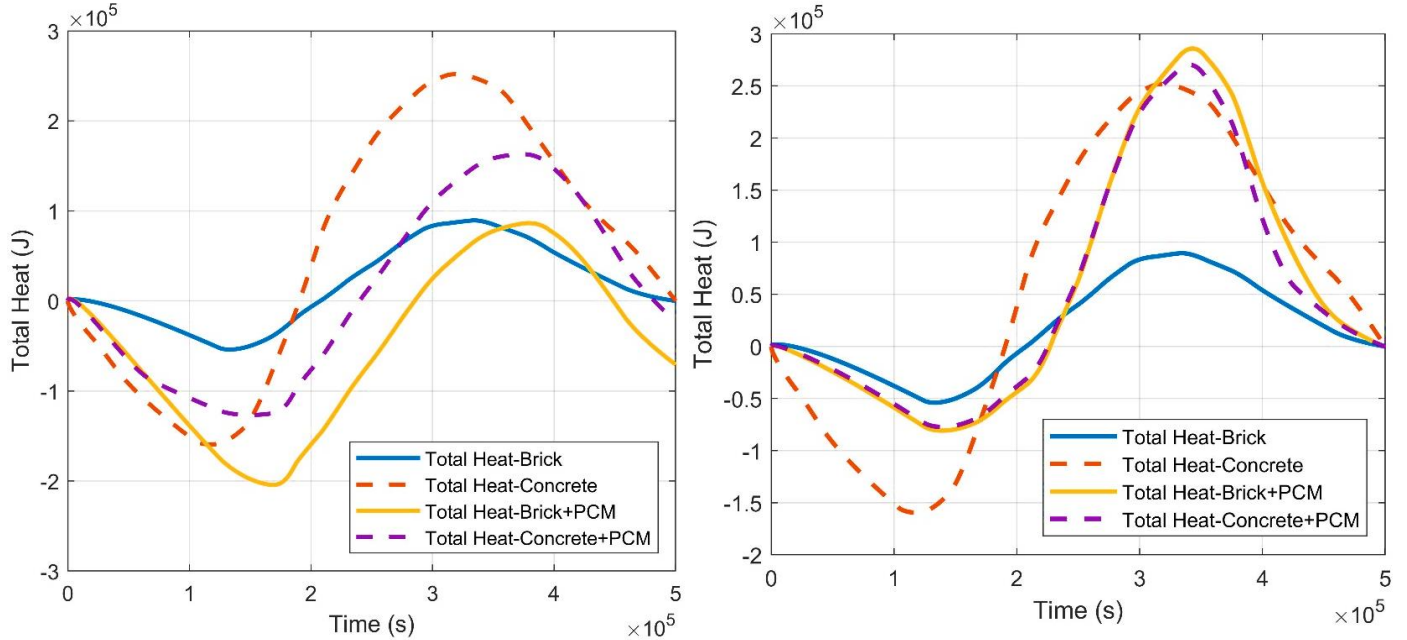


Figure 4.57. The total heat content in Case 1 with PCM1 (Left), PCM2 (Right)

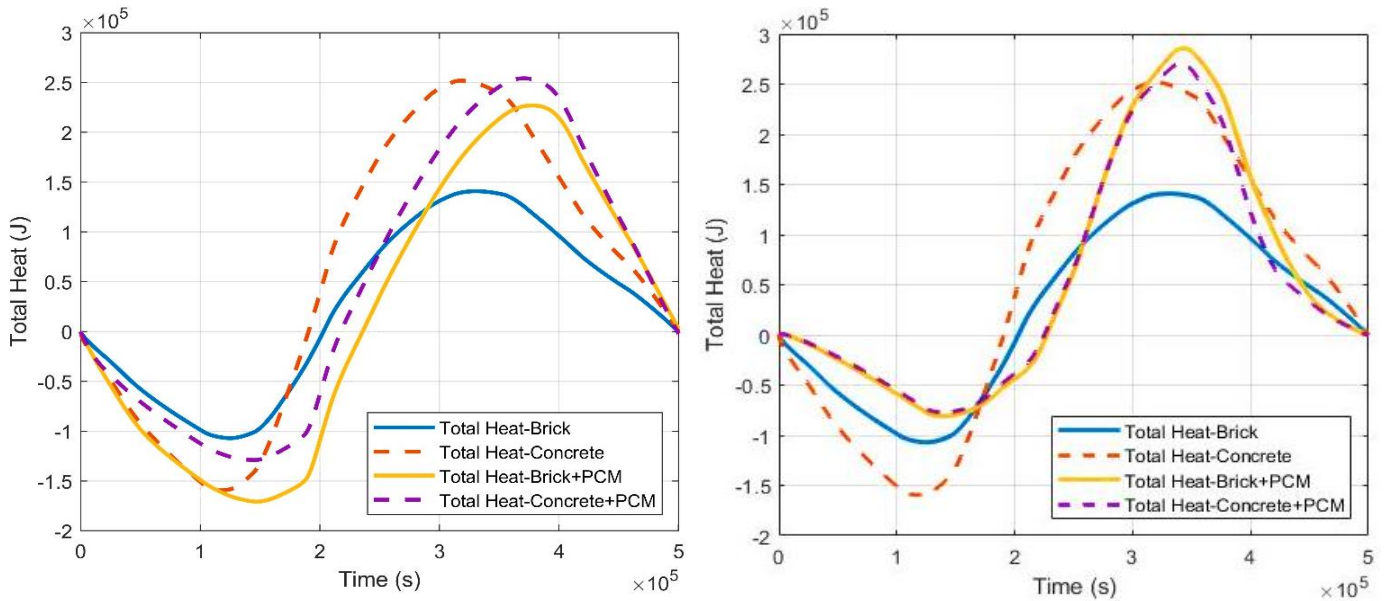


Figure 4.58. The total heat content in Case 2 with PCM1 (Left), PCM2 (Right)

Figures 4.59 and 4.60 provide a comprehensive overview of the cooling load, representing the heat transfer from the outdoor environment to the indoor space across the wall structure. In Figure 4.59 (left), the significant impact of using PCM1 in conjunction with brick or concrete is evident. PCM1 efficiently stores the heat from the outside, preventing it from infiltrating the interior space. In contrast, Figure 4.59 (right) illustrates that PCM2 does not store as much heat due to its higher melting temperature, leading to a comparatively lower heat retention. Upon examining the values in the tables, it becomes apparent that the use of PCMs reduces the heat transfer to the interior, with the extent of reduction varying from total to partial. This reduction is contingent upon factors such as environmental temperature, melting temperature, and the latent heat properties of the PCM materials. For instance, Tables (4.18-4.21) listed the concrete values of the results' parameters for all cases, I observed that integrating Phase Change Materials (PCMs) into construction walls significantly reduces the heat flow from outside to inside. PCM1, in particular, greatly decreases the interior heat flow due to its high latent heat capacity and appropriate melting temperature range, allowing it to melt and efficiently store energy. Additionally, it is noted that the cooling heat transfer values for both brick and concrete integrated with PCM are approximately halved. This demonstrates the effectiveness of PCM in storing most of the heat energy as latent heat, thereby minimizing heat transfer into the indoor environment.

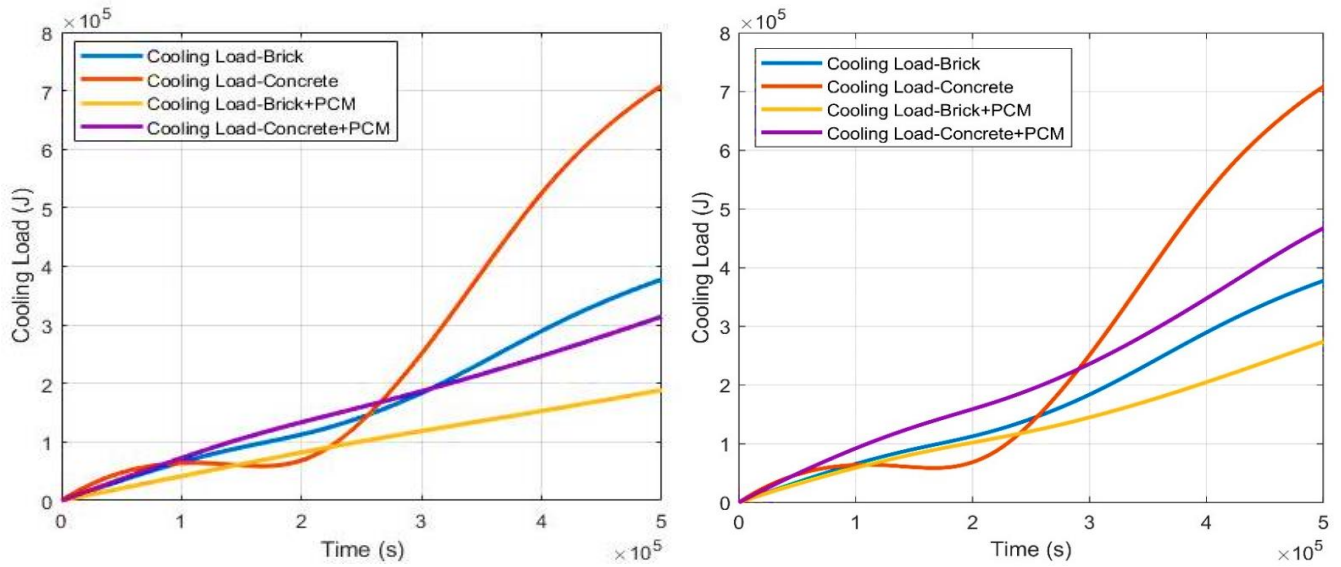


Figure 4.59. Cooling load in Case 1 with PCM1 (Left), PCM2 (Right)

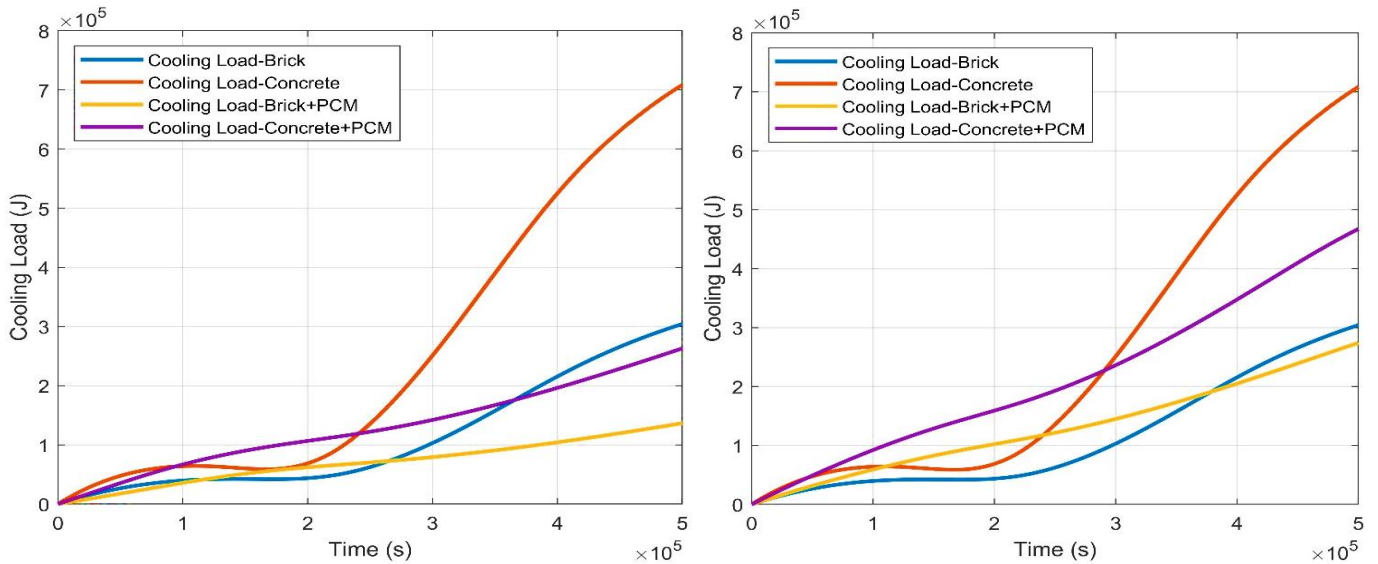


Figure 4.60. Cooling load in Case 2 with PCM1 (Left), PCM2 (Right)

Table 4.18. The results in Case 1 with PCM1

Parameters	Brick	Concrete	Brick+PCM1	Concrete+PCM1
$\max(Q_{Total}) \text{ kJ} / \text{m}^2$	89.509×10^3	150.07×10^3	204.41×10^3	159.42×10^3
$\text{mean}(Q_{Total}) \text{ kJ} / \text{m}^2$	39.245×10^3	64.070×10^3	84.962×10^3	87.624×10^3
$\max(Q_{Sensible}) \text{ kJ} / \text{m}^2$	89.509×10^3	251.80×10^3	24.668×10^3	9.7919×10^3
$\text{mean}(Q_{Sensible}) \text{ kJ} / \text{m}^2$	39.245×10^3	131.98×10^3	14.752×10^3	6.8909×10^3
$\max(Q_{Latent}) \text{ kJ} / \text{m}^2$	0	0	182.59×10^3	149.63×10^3
$\text{mean}(Q_{Latent}) \text{ kJ} / \text{m}^2$	0	0	80.930×10^3	80.734×10^3
$\max(Q_{Cooling}) \text{ J} / \text{m}^2$	377.78×10^3	879.75×10^3	188.70×10^3	239.28×10^3
$\text{mean}(Q_{Cooling}) \text{ J} / \text{m}^2$	168.26×10^3	391.83×10^3	98.121×10^3	123.19×10^3

Table 4.19. The results in Case 1 with PCM2

Parameters	Brick	Concrete	Brick+PCM2	Concrete+PCM2
$\max(Q_{Total}) \text{ kJ} / \text{m}^2$	89.509×10^3	150.07×10^3	285.77×10^3	270.17×10^3
$\text{mean}(Q_{Total}) \text{ kJ} / \text{m}^2$	39.245×10^3	64.070×10^3	97.638×10^3	89.696×10^3
$\max(Q_{Sensible}) \text{ kJ} / \text{m}^2$	89.509×10^3	251.80×10^3	80.829×10^3	77.298×10^3
$\text{mean}(Q_{Sensible}) \text{ kJ} / \text{m}^2$	39.245×10^3	131.98×10^3	38.437×10^3	42.473×10^3
$\max(Q_{Latent}) \text{ kJ} / \text{m}^2$	0	0	239.81×10^3	204.90×10^3
$\text{mean}(Q_{Latent}) \text{ kJ} / \text{m}^2$	0	0	60.884×10^3	48.082×10^3
$\max(Q_{Cooling}) \text{ J} / \text{m}^2$	377.78×10^3	879.75×10^3	274.02×10^3	467.4×10^3
$\text{mean}(Q_{Cooling}) \text{ J} / \text{m}^2$	168.26×10^3	391.83×10^3	129.64×10^3	213.78×10^3

Table 4.20. The results in Case 2 with PCM1

Parameters	Brick	Concrete	Brick+PCM1	Concrete+PCM1
$\max(Q_{Total}) \text{ kJ} / \text{m}^2$	140.83×10^3	251.80×10^3	226.89×10^3	254.19×10^3
$\text{mean}(Q_{Total}) \text{ kJ} / \text{m}^2$	77.542×10^3	131.98×10^3	125.23×10^3	123.75×10^3
$\max(Q_{Sensible}) \text{ kJ} / \text{m}^2$	140.83×10^3	251.80×10^3	95.532×10^3	113.35×10^3
$\text{mean}(Q_{Sensible}) \text{ kJ} / \text{m}^2$	77.542×10^3	131.98×10^3	32.880×10^3	42.238×10^3
$\max(Q_{Latent}) \text{ kJ} / \text{m}^2$	0	0	229.94×10^3	255.16×10^3
$\text{mean}(Q_{Latent}) \text{ kJ} / \text{m}^2$	0	0	105.85×10^3	100.61×10^3
$\max(Q_{Cooling}) \text{ J} / \text{m}^2$	304.19×10^3	708.39×10^3	136.57×10^3	263.04×10^3
$\text{mean}(Q_{Cooling}) \text{ J} / \text{m}^2$	110.86×10^3	252.76×10^3	69.906×10^3	128.71×10^3

Table 4.21. The results in Case 2 with PCM2

Parameters	Brick	Concrete	Brick+PCM2	Concrete+PCM2
$\max(Q_{Total}) \text{ kJ} / \text{m}^2$	89.509×10^3	251.80×10^3	381.24×10^3	365.72×10^3
$\text{mean}(Q_{Total}) \text{ kJ} / \text{m}^2$	39.245×10^3	131.98×10^3	155.68×10^3	148.85×10^3
$\max(Q_{Sensible}) \text{ kJ} / \text{m}^2$	89.509×10^3	251.80×10^3	76.041×10^3	156.69×10^3
$\text{mean}(Q_{Sensible}) \text{ kJ} / \text{m}^2$	39.245×10^3	131.98×10^3	76.041×10^3	83.155×10^3
$\max(Q_{Latent}) \text{ kJ} / \text{m}^2$	0	0	301.16×10^3	258.61×10^3
$\text{mean}(Q_{Latent}) \text{ kJ} / \text{m}^2$	0	0	83.240×10^3	68.074×10^3
$\max(Q_{Cooling}) \text{ J} / \text{m}^2$	377.78×10^3	708.39×10^3	220.39×10^3	376.23×10^3

4.5.5.3. Computational Time of The Numerical Methods

Table 4.22 presents the computational time for recent numerical methods applied to two distinct geometries: brick and brick integrated with PCM. The inclusion of only these two types

of geometries stems from the fact that computational times for brick and concrete are identical, a consistency maintained even when integrated with PCMs due to their equivalent system sizes. The tabulated values indicate that LH methods demonstrate quicker computational times. Nevertheless, it becomes evident that LH methods emerge as the optimal choice, striking a balance between speed and stability across all time step sizes.

Table 4.22. The computational time of numerical methods

Geometry	Computational time (s)		
	ASH	SH	LH
Brick or Concrete	29.1569	24.2810	19.7127
Brick or Concrete+PCM	549.5274	451.4683	373.3887

4.5.6. The Summary of The Present Section

The present work summarizes the following:

1. The novelty of recent numerical methods in effectively addressing the complexities associated with phase change, showcasing their proficiency in handling this intricate problem.
2. The study establishes the reliability of the Effective Heat Capacity model, serving as a robust computational tool for simulating Phase Change Materials (PCMs).
3. Emphasizing the substantial impact of PCMs on cooling loads and heat transfer dynamics between outdoor and indoor environments, particularly in diverse wall structures, the findings underscore the crucial role of PCMs in energy management.
4. Performance Disparities between PCM1 and PCM2: PCM1, distinguished by its lower melting temperature and higher latent heat, excels in proficiently storing external heat, thereby preventing its ingress into indoor spaces. In contrast, PCM2, characterized by higher melting temperature and lower latent heat, exhibits diminished efficiency in heat retention. PCM1, notably, achieves a significant reduction in heat transfer into interior spaces, approaching near-elimination due to its high latent heat and appropriate melting temperature range.
5. Impact on Interior Temperature Regulation: PCM1, especially when coupled with brick or concrete, sustains indoor temperatures near initial values, exemplifying its adeptness in efficient heat storage. Conversely, PCM2, while providing insulation, exerts a comparatively lesser influence on indoor thermal conditions.

In conclusion, this study accentuates the pivotal role of PCMs in mitigating cooling loads, preserving indoor temperatures, and impeding external heat intrusion. The judicious selection of PCMs, influenced by latent heat properties and melting temperature considerations, emerges as a critical factor in optimizing energy efficiency and elevating thermal comfort within architectural frameworks. For climates characterized by cold conditions, PCM2 is recommended, particularly when augmented by solar panels to harness and store daytime solar energy as latent heat for nocturnal cold periods. These discernments bear substantive implications for the formulation of

USE EFFICIENT METHODS TO SOLVE REAL-LIFE HEAT TRANSFER PROBLEMS

energy-efficient structures, underscoring the strategic importance of PCM selection in building materials and construction methodologies.

5. THESIS POINTS – NEW SCIENTIFIC RESULTS

- T1. I constructed and tested the Shifted-Hopscotch algorithms, which were fully explicit time-integrators obtained by applying half- and full-time steps in the odd-even hopscotch structure. I applied the conventional theta method with nine different values, and the non-conventional CNe method to construct 10^5 combinations and I chose the top five of them via numerical experiments. These experiments suggest that the proposed methods are, indeed, competitive, as they can give fairly accurate results orders of magnitude faster than the well-optimized MATLAB routines or the Crank–Nicolson method, and they are also significantly more accurate for stiff systems than the UPFD, the Dufort–Frankel, or the original odd-even hopscotch method. If high accuracy is required, the S4 (0, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, 1) combination can be proposed; however, when preserving positivity is crucial, the S1 (C, C, C, C, C) algorithm should be used.
- T2. As an application of the efficient elaborated methods, I investigated 13 of the new methods to solve the linear heat conduction equation in building walls. Eight of these methods are recently invented explicit algorithms that are unconditionally stable, including the SH method. Verification tests were first performed in a 2D case by comparing them to analytical solutions, using both equidistant and non-equidistant grids. Space-dependent boundary conditions were applied on the brick side, and time-dependent boundary conditions on the insulation side. Results indicate that the original Odd-Even Hopscotch method is usually the best algorithm for uniform cases, while the Leapfrog-Hopscotch algorithm performs best for non-uniform cases, but the Shifted-Hopscotch algorithm is also competitive.
- T3. I also examined 11 of the new methods to solve heat conduction, convection, radiation, and heat generation inside building walls' elements. These methods were tested on real-life applications involving surface area (one-layer brick) and cross-sectional area (two-layer brick and insulator) walls, with and without thermal bridging, to determine accuracy dependence on material properties, mesh type, and time step size. Neumann boundary conditions were applied to all boundaries, for surface area cases, the heat source, convection, and radiation inside all elements were considered, while for cross-sectional area cases only the right and left boundary elements containing heat source, convection, and radiation. The results indicate that the Original Odd-Even Hopscotch method is usually the best for uniform cases, while the Leapfrog-Hopscotch algorithm performs best for non-uniform cases.
- T4. In addition to Cartesian coordinates, I developed 9 of the new methods to solve heat transfer problems in cylindrical and spherical geometries. I reproduced novel and nontrivial analytical solutions for the heat-conduction PDE with high accuracy. Furthermore, I verified the numerical methods in cylindrical and spherical coordinates, incorporating convection and radiation terms, by reproducing real experimental data of a heated cylinder and comparing it with Finite Element Methods (FEM) ANSYS workbench. Convection and nonlinear radiation were considered on the boundary of the cylinder. Verification results demonstrated the high accuracy of the numerical methods in dealing with cylindrical and spherical bodies. Additionally, temperature comparisons across all approaches revealed that explicit methods are more accurate than finite element software in all cases, with the

Leapfrog-Hopscotch algorithm typically being the most accurate among the studied methods.

- T5. I investigated the heat transfer through building walls, considering different wall geometries and heat load scenarios, encompassing both cooling and heating. My objective was to analyze how heat transfer depends on the wall materials and evaluate algorithm performance in cases involving heat transfer between solid surfaces and fluid (convection) on the outdoor surface, particularly across an air gap between the insulation and Photovoltaic Cells (PVC). The results of the study reveal that insulation prevents heat from entering the building, maintaining a comfortable indoor environment. Forced convection significantly enhances heat dissipation, especially during cooling operations to protect PVC with limited working temperature. Furthermore, the simulations highlight the air gap's efficiency in cooling PVC and reducing maximum temperatures on the insulation's outer surface, especially under forced convection conditions. The test results show that the Leapfrog Hopscotch algorithm offers the best solution for this highly stiff system, followed by the Asymmetric and Shifted-Hopscotch algorithms.
- T6. I also simulated a multilayer wall integrated with PCMs using an effective heat capacity model and I employed the Leapfrog-Hopscotch methods for that. I validated my approach against established mathematical expressions and models in the literature, investigating various building wall geometries, two types of PCMs used in this investigation, and boundary conditions. The objective was to maintain interior temperatures within comfort zones. Regardless of the wall material, whether brick or concrete, my simulations consistently demonstrated the PCM's effectiveness in minimizing heat transfer into indoor environment.

ACKNOWLEDGEMENTS

I would like to express my deepest gratitude to my supervisor Dr. Endre Kovács, whose support, guidance, and wisdom have been invaluable throughout my study. His knowledge has been instrumental in steering my research in the right direction. I am also sincerely thankful to my co-supervisor Dr. Betti Bolló for assessing my work and providing critical feedback that greatly enhanced the quality of my research.

I owe a profound debt of gratitude to my family, especially my father and mother, for their patience and understanding while I was far from them, even when they needed me most. My sisters deserve heartfelt thanks for their constant sacrifices, which allowed me to focus on my studies.

My deepest appreciation goes to my wife, who has endured the challenges of traveling just to be with me, providing unwavering support and companionship. The biggest gratitude goes to my little angel, my daughter Sidra, whose inspiration and daily energy gave me the strength to complete this journey.

Lastly, I extend my thanks to every person who has assisted me in my study. Your help and support have been crucial to my success.

Thank you all.

REFERENCES

- [1] Mojtabi, A.; Deville, M.O. One-dimensional linear advection-diffusion equation: Analytical and finite element solutions. *Comput. Fluids* 2015, 107, 189–195, doi:10.1016/j.compfluid.2014.11.006.
- [2] Barna, I.F.; Bognár, G.; Guedda, M.; Mátyás, L.; Hriczó, K. Analytic self-similar solutions of the Kardar-Parisi-Zhang interface growing equation with various noise terms. *Math. Model. Anal.* 2020, 25, 241–256, doi:10.3846/mma.2020.10459.
- [3] Barna, I.F.; Kersner, R. Heat conduction: A telegraph-type model with self-similar behavior of solutions. *J. Phys. A Math. Theor.* 2010, 43, 375210, doi:10.1088/1751-8113/43/37/375210.
- [4] Mátyás, L.; Barna, I.F. General self-similar solutions of diffusion equation and related constructions. arXiv 2021, arXiv:2104.09128.
- [5] Bastani, M.; Salkuyeh, D.K. A highly accurate method to solve Fisher's equation. *Pramana—J. Phys.* 2012, 78, 335–346, doi:10.1007/s12043-011-0243-8.
- [6] Agbavon, K.M.; Appadu, A.R.; Khumalo, M. On the numerical solution of Fisher's equation with coefficient of diffusion term much smaller than coefficient of reaction term. *Adv. Differ. Eq.* 2019, 146, doi:10.1186/s13662-019-2080-x.
- [7] Zoppou, C.; Knight, J.H. Analytical solution of a spatially variable coefficient advection-diffusion equation in up to three dimensions. *Appl. Math. Model.* 1999, 23, 667–685, doi:10.1016/S0307-904X(99)00005-0.
- [8] Lienhard, J.H., IV; Lienhard, J.H., V *A Heat Transfer Textbook*, 4th ed.; Phlogiston Press: Cambridge, MA, USA, 2017; ISBN 9780971383524.
- [9] Cusini, M. *Dynamic Multilevel Methods for Simulation of Multiphase Flow in Heterogeneous Porous Media*; Delft University of Technology: Delft, The Netherlands, 2019.
- [10] Appau, P.O.; Dankwa, O.K.; Brantson, E.T. A comparative study between finite difference explicit and implicit method for predicting pressure distribution in a petroleum reservoir. *Int. J. Eng. Sci. Technol.* 2019, 11, 23–40, doi:10.4314/ijest.v11i4.3.
- [11] Moncorgé, A.; Tchelepi, H.A.; Jenny, P. Modified sequential fully implicit scheme for compositional flow simulation. *J. Comput. Phys.* 2017, 337, 98–115, doi:10.1016/j.jcp.2017.02.032.
- [12] Chou, C.S.; Zhang, Y.T.; Zhao, R.; Nie, Q. Numerical methods for stiff reaction-diffusion systems. *Discret. Contin. Dyn. Syst.—Ser. B* 2007, 7, 515–525, doi:10.3934/dcdsb.2007.7.515.
- [13] Gumel, A.B.; Ang, W.T.; Twizell, E.H. Efficient parallel algorithm for the two-dimensional diffusion equation subject to specification of mass. *Int. J. Comput. Math.* 1997, 64, 153–163, doi:10.1080/00207169708804580.
- [14] Xue, G.; Feng, H. A new parallel algorithm for solving parabolic equations. *Adv. Differ. Eq.* 2018, 2018, 1–6, doi:10.1186/s13662-018-1617-8.
- [15] Gagliardi, F.; Moreto, M.; Olivieri, M.; Valero, M. The international race towards Exascale in Europe. *CCF Trans. High Perform. Comput.* 2019, 3–13, doi:10.1007/s42514-019-00002-y.

-
- [16] Reguly, I.Z.; Mudalige, G.R. Productivity, performance, and portability for computational fluid dynamics applications. *Comput. Fluids* 2020, 199, 104425, doi:10.1016/j.compfluid.2020.104425.
- [17] Gordon, P. Nonsymmetric Difference Equations. *J. Soc. Ind. Appl. Math.* 1965, 13, 667–673, doi:10.1137/0113044.
- [18] Gourlay, A.R. Hopscotch: A Fast Second-order Partial Differential Equation Solver. *IMA J. Appl. Math.* 1970, 6, 375–390.
- [19] Gourlay, A.R.; McGuire, G.R. General Hopscotch Algorithm for the Numerical Solution of Partial Differential Equations. *IMA J. Appl. Math.* 1971, 7, 216–227.
- [20] Gourlay, A.R. Some recent methods for the numerical solution of time-dependent partial differential equations. *Proc. R. Soc. London. A Math. Phys. Sci.* 1971, 323, 219–235, doi:10.1098/rspa.1971.0099.
- [21] Hundsdorfer, W.H.; Verwer, J.G. *Numerical Solution of Time-Dependent Advection-Diffusion-Reaction Equations*; Springer: Berlin, Germany, 2003;.
- [22] Morris, J.L.; Nicoll, I.F. Hopscotch methods for an anisotropic thermal print head problem. *J. Comput. Phys.* 1973, 13, 316–337, doi:10.1016/0021-9991(73)90039-9.
- [23] ten Thije Boonkkamp, J.H.M. The Odd-Even Hopscotch Pressure Correction Scheme for the Incompressible Navier–Stokes Equations. *SIAM J. Sci. Stat. Comput.* 1988, 9, 252–270, doi:10.1137/0909016.
- [24] Harley, C. Hopscotch method: The numerical solution of the Frank-Kamenetskii partial differential equation. *Appl. Math. Comput.* 2010, 217, 4065–4075, doi:10.1016/j.amc.2010.10.020.
- [25] Al-Bayati, A.; Manaa, S.; Al-Rozbayani, A. Comparison of Finite Difference Solution Methods for Reaction Diffusion System in Two Dimensions. *AL-Rafidain J. Comput. Sci. Math.* 2011, 8, 21–36, doi:10.33899/csmj.2011.163605.
- [26] Xu, J.; Shao, S.; Tang, H. Numerical methods for nonlinear Dirac equation. *J. Comput. Phys.* 2013, 245, 131–149, doi:10.1016/j.jcp.2013.03.031.
- [27] de Goede, E.D.; ten Thije Boonkkamp, J.H.M. Vectorization of the Odd–Even Hopscotch Scheme and the Alternating Direction Implicit Scheme for the Two-Dimensional Burgers Equations. *SIAM J. Sci. Stat. Comput.* 1990, 11, 354–367, doi:10.1137/0911021.
- [28] Maritim, S.; Rotich, J.K.; Bitok, J.K. Hybrid hopscotch Crank-Nicholson-Du Fort and Frankel (HP-CN-DF) method for solving two dimensional system of Burgers’ equation. *Appl. Math. Sci.* 2018, 12, 935–949, doi:10.12988/ams.2018.8798.
- [29] Maritim, S.; Rotich, J.K. Hybrid Hopscotch Method for Solving Two Dimensional System of Burgers’ Equation. *Int. J. Sci. Res.* 2018, 8, 492–497.
- [30] Saleh, M.; Nagy, Á.; Kovács, E. Construction and investigation of new numerical algorithms for the heat equation: Part 1. *Multidiszcip. Tudományok* 2020, 10, 323–338, doi:10.35925/j.multi.2020.4.36.
- [31] Saleh, M.; Nagy, Á.; Kovács, E. Construction and investigation of new numerical algorithms for the heat equation: Part 2. *Multidiszcip. Tudományok* 2020, 10, 339–348, doi:10.35925/j.multi.2020.4.37.
- [32] Saleh, M.; Nagy, Á.; Kovács, E. Construction and investigation of new numerical algorithms for the heat equation: Part 3. *Multidiszcip. Tudományok* 2020, 10, 349–360, doi:10.35925/j.multi.2020.4.38.

-
- [33] X. Geng, J. Wang, Y. Gao, and X. Meng, "Location combination optimization of thermal insulation material and phase-change material in multi-layer walls under air-conditioning continuous and intermittent operation," *J. Energy Storage*, vol. 44, p. 103449, Dec. 2021, doi: 10.1016/J.EST.2021.103449.
- [34] Z. Liu, J. Hou, D. Wei, X. Meng, and B. J. Dewancker, "Thermal performance analysis of lightweight building walls in different directions integrated with phase change materials (PCM)," *Case Stud. Therm. Eng.*, vol. 40, p. 102536, Dec. 2022, doi: 10.1016/J.CSITE.2022.102536.
- [35] E. Tunçbilek, M. Arıcı, M. Krajčák, D. Li, S. Nižetić, and A. M. Papadopoulos, "Enhancing building wall thermal performance with phase change material and insulation: A comparative and synergistic assessment," *Renew. Energy*, vol. 218, p. 119270, Dec. 2023, doi: 10.1016/J.RENENE.2023.119270.
- [36] Y. Cascone, A. Capozzoli, and M. Perino, "Optimisation analysis of PCM-enhanced opaque building envelope components for the energy retrofitting of office buildings in Mediterranean climates," *Appl. Energy*, vol. 211, pp. 929–953, Feb. 2018, doi: 10.1016/J.APENERGY.2017.11.081.
- [37] R. F. Jam, M. Gholizadeh, M. Deymi-Dashtebayaz, and E. Tayyeban, "Determining the optimal location and thickness of phase change materials in the building walls: an energy-economic analysis," *J. Brazilian Soc. Mech. Sci. Eng.*, vol. 45, no. 10, p. 554, 2023, doi: 10.1007/s40430-023-04472-8.
- [38] M. J. Abden, Z. Tao, M. A. Alim, Z. Pan, L. George, and R. Wuhner, "Combined use of phase change material and thermal insulation to improve energy efficiency of residential buildings," *J. Energy Storage*, vol. 56, p. 105880, Dec. 2022, doi: 10.1016/J.EST.2022.105880.
- [39] E. Iffa, D. Hun, M. Salonvaara, S. Shrestha, and M. Lapsa, "Performance evaluation of a dynamic wall integrated with active insulation and thermal energy storage systems," *J. Energy Storage*, vol. 46, p. 103815, Feb. 2022, doi: 10.1016/J.EST.2021.103815.
- [40] P. Arumugam, V. Ramalingam, and P. Vellaichamy, "Optimal positioning of phase change material and insulation through numerical investigations to reduce cooling loads in office buildings," *J. Energy Storage*, vol. 52, p. 104946, Aug. 2022, doi: 10.1016/J.EST.2022.104946.
- [41] Savović, S.; Djordjevich, A. Numerical solution of diffusion equation describing the flow of radon through concrete. *Appl. Radiat. Isot.* 2008, 66, 552–555. Available online: <https://www.sciencedirect.com/science/article/pii/S0969804307002874> (accessed on 13 June 2022.).
- [42] Suárez-Carreño, F.; Rosales-Romero, L. Convergency and stability of explicit and implicit schemes in the simulation of the heat equation. *Appl. Sci.* 2021, 11, 4468. <https://doi.org/10.3390/app11104468>.
- [43] Haq, S.; Ali, I. Approximate solution of two-dimensional Sobolev equation using a mixed Lucas and Fibonacci polynomials. *Eng. Comput.* 2021. Available online: <https://link.springer.com/article/10.1007/s00366-021-01327-5> (accessed on 13 June 2022.).
- [44] Lima, S.A.; Kamrujjaman; Islam, S. Numerical solution of convection-diffusion-reaction equations by a finite element method with error correlation. *AIP Adv.* 2021, 11, 085225. <https://doi.org/10.1063/5.0050792>.
- [45] Ivanovic, M.; Svicevic, M.; Savovic, S. Numerical solution of Stefan problem with variable space grid method based on mixed finite element/ finite difference approach. *Int. J.*

Numer. Methods Heat Fluid Flow 2017, 27, 2682–2695. <https://doi.org/10.1108/hff-02-2014-0034>.

[46] Amoah-Mensah, J.; Boateng, F.O.; Bonsu, K. Numerical solution to parabolic PDE using implicit finite difference approach. *Math. Theory Model.* 2016, 6, 74–84.

[47] Mbroh, N.A.; Munyakazi, J.B. A robust numerical scheme for singularly perturbed parabolic reaction-diffusion problems via the method of lines. *Int. J. Comput. Math.* 2021. <https://doi.org/10.1080/00207160.2021.1954621>.

[48] Aminikhah, H.; Alavi, J. An efficient B-spline difference method for solving system of nonlinear parabolic PDEs. *SeMA J.* 2018, 75, 335–348; ISBN4032401701398.

[49] Ali, I.; Haq, S.; Nisar, K.S.; Arifeen, S.U. Numerical study of 1D and 2D advection-diffusion-reaction equations using Lucas and Fibonacci polynomials. *Arab. J. Math.* 2021, 10, 513–526. <https://doi.org/10.1007/s40065-021-00330-4>.

[50] Singh, M.K.; Rajput, S.; Singh, R.K. Study of 2D contaminant transport with depth varying input source in a groundwater reservoir. *Water Sci. Technol. Water Supply* 2021, 21, 1464–1480. <https://doi.org/10.2166/ws.2021.010>.

[51] Haq, S.; Hussain, M.; Ghafoor, A. A computational study of variable coefficients fractional advection–diffusion–reaction equations via implicit meshless spectral algorithm. *Eng. Comput.* 2020, 36, 1243–1263. Available online: <https://link.springer.com/article/10.1007/s00366-019-00760-x> (accessed on 13 June 2022.).

[52] Reguly, I.Z.; Mudalige, G.R. Productivity, performance, and portability for computational fluid dynamics applications. *Comput. Fluids* 2020, 199, 104425. <https://doi.org/10.1016/j.compfluid.2020.104425>.

[53] Gagliardi, F.; Moreto, M.; Olivieri, M.; Valero, M. The international race towards Exascale in Europe. *CCF Trans. High Perform. Comput.* 2019, 1, 3–13. <https://doi.org/10.1007/s42514-019-00002-y>.

[54] Chen-Charpentier, B.M.; and Kojouharov, H. V. “An unconditionally positivity preserving scheme for advection-diffusion reaction equations,” *Math. Comput. Model.*, vol. 57, pp. 2177–2185, 2013, doi: 10.1016/j.mcm.2011.05.005.

[55] C. Hirsch, *Numerical computation of internal and external flows, volume 1: Fundamentals of numerical discretization.* Wiley, 1988.

[56] G. Sottas, “Rational Runge-Kutta methods are not suitable for stiff systems of ODEs,” *J. Comput. Appl. Math.*, vol. 10, pp. 169–174, 1984.

[57] A. H. Workie, “New Modification on Heun’s Method Based on Contraharmonic Mean for Solving Initial Value Problems with High Efficiency,” *J. Math.*, vol. 2020, 2020, doi: 10.1155/2020/6650855.

[58] A. R. Gourlay and G. R. McGuire, “General Hopscotch Algorithm for the Numerical Solution of Partial Differential Equations,” *IMA J. Appl. Math.*, vol. 7, no. 2, pp. 216–227, 1971.

[59] Kovács, E. A class of new stable, explicit methods to solve the non-stationary heat equation. *Numer. Methods Partial Differ. Equ.* 2020, 37, 2469–2489. <https://doi.org/10.1002/num.22730>.

[60] Holmes, M.H. *Introduction to Numerical Methods in Differential Equations*; Springer: New York, NY, USA, 2007; ISBN978-0387-30891-3.

[61] Kovács, E.; Nagy, Á.; Saleh, M. A set of new stable, explicit, second order schemes for the non-stationary heat conduction equation. *Mathematics* 2021, 9, 2284. Available online: <https://www.mdpi.com/2227-7390/9/18/2284> (accessed on 3 November 2021).

-
- [62] Á. Nagy, M. Saleh, I. Omle, H. Kareem, and E. Kovács, “New stable, explicit, shifted-hopscotch algorithms for the heat equation,” *Math. Comput. Appl.*, vol. 26, no. 61, 2021, [Online]. Available: <https://www.mdpi.com/2297-8747/26/3/61/htm>
- [63] Á. Nagy, I. Omle, H. Kareem, E. Kovács, I. F. Barna, and G. Bognar, “Stable, Explicit, Leapfrog-Hopscotch Algorithms for the Diffusion Equation,” *Computation*, vol. 9, no. 8, p. 92, 2021.
- [64] H. K. Jalghaf, E. Kovács, J. Majár, Á. Nagy, and A. H. Askar, “Explicit stable finite difference methods for diffusion-reaction type equations,” *Mathematics*, vol. 9, no. 24, 2021, doi: 10.3390/math9243308.
- [65] A. Iserles, *A First Course in the Numerical Analysis of Differential Equations*. Cambridge: Cambridge Univ. Press, 2009. ISBN9788490225370.
- [66] Cabezas, S.; Hegedűs, G.; Bencs, P. Thermal experimental and numerical heat transfer analysis of a solid cylinder in longitudinal direction. *Analecta Tech. Szeged*. 2023, 17, 16–27. <https://doi.org/10.14232/analecta.2023.1.16-27>.
- [67] A. Tutueva, T. Karimov, and D. Butusov, “Semi-implicit and semi-explicit Adams-Bashforth-Moulton methods,” *Mathematics*, vol. 8, no. 5, 2020, doi: 10.3390/MATH8050780.
- [68] J. Kettle et al., “Review of technology specific degradation in crystalline silicon, cadmium telluride, copper indium gallium selenide, dye sensitised, organic and perovskite solar cells in photovoltaic modules: Understanding how reliability improvements in mature technolog,” *Prog. Photovoltaics Res. Appl.*, vol. 30, no. 12, pp. 1365–1392, Dec. 2022, doi: 10.1002/pip.3577.
- [69] A. Uddin, M. B. Upama, H. Yi, and L. Duan, “Encapsulation of organic and perovskite solar cells: A review,” *Coatings*, vol. 9, no. 2, p. 65, Jan. 2019, doi: 10.3390/coatings9020065.
- [70] M. Samuel L., P. Suel-Hyun, M. Tensei, and D. P. Bentz, “Measurement of Thermal Properties of Gypsum Board At Elevated Temperatures,” *Proc. Fifth Int. Conf. Struct. Fire*, pp. 656–665, 2008.
- [71] Jack P. Holman, “Heat Transfer, Tenth Edition (McGraw-Hill Series in Mechanical Engineering),” McGraw-Hill, Inc, New York, vol. 9 MB, p. 758, 2010, [Online]. Available: www.mhhe.com
- [72] L. S. Athanasiou, D. I. Fotiadis, and L. K. Michalis, “8 - Propagation of Segmentation and Imaging System Errors,” in *Atherosclerotic Plaque Characterization Methods Based on Coronary Imaging*, L. S. Athanasiou, D. I. Fotiadis, and L. K. Michalis, Eds., Oxford: Academic Press, 2017, pp. 151–166. doi: <https://doi.org/10.1016/B978-0-12-804734-7.00008-7>.
- [73] A. D. Solomon, “An easily computable solution to a two-phase Stefan problem,” *Sol. Energy*, vol. 23, no. 6, pp. 525–528, Jan. 1979, doi: 10.1016/0038-092X(79)90077-X.
- [74] <https://www.accuweather.com/en/iq/basra/206820/weather-forecast/206820>.
- [75] M. Saleh, E. Kovács, I. F. Barna, and L. Mátyás, “New Analytical Results and Comparison of 14 Numerical Schemes for the Diffusion Equation with Space-Dependent Diffusion Coefficient,” *Mathematics*, vol. 10, no. 15, p. 2813, Aug. 2022, doi: 10.3390/math10152813.
- [76] H. K. Jalghaf, E. Kovács, and B. Bolló, “Comparison of Old and New Stable Explicit Methods for Heat Conduction, Convection, and Radiation in an Insulated Wall with Thermal Bridging,” *Buildings*, vol. 12, no. 9, pp. 1–26, 2022, doi: 10.3390/buildings12091365.

LIST OF PUBLICATIONS RELATED TO THE TOPIC OF THE RESEARCH FIELD

- (1) Á. Nagy, M. Saleh, I. Omle, H. Kareem, and E. Kovács, “New stable, explicit, shifted-hopscotch algorithms for the heat equation,” *Math. Comput. Appl.*, vol. 26, no. 61, 2021.
- (2) Á. Nagy, I. Omle, H. Kareem, E. Kovács, I. F. Barna, and G. Bognar, “Stable, Explicit, Leapfrog-Hopscotch Algorithms for the Diffusion Equation,” *Computation*, vol. 9, no. 8, p. 92, 2021.
- (3) H. K. Jalghaf, E. Kovács, J. Majár, Á. Nagy, and A. H. Askar, “Explicit stable finite difference methods for diffusion-reaction type equations,” *Mathematics*, vol. 9, no. 24, 2021, doi: 10.3390/math9243308.
- (4) Kareem, H.; Omle, I.; Kovács, E. A Comparative Study of Explicit and Stable Time Integration Schemes for Heat Conduction in an Insulated Wall. *Buildings* 2022, 12. <https://doi.org/10.3390/buildings12060824>.
- (5) H. K. Jalghaf, E. Kovács, and B. Bolló, “Comparison of Old and New Stable Explicit Methods for Heat Conduction, Convection, and Radiation in an Insulated Wall with Thermal Bridging,” *Buildings*, vol. 12, no. 9, pp. 1–26, 2022, doi: 10.3390/buildings12091365.
- (6) H. K. Jalghaf, E. Kovács, I. F. Barna, and L. Mátyás, “Analytical Solution and Numerical Simulation of Heat Transfer in Cylindrical and Spherical Shaped Bodies”, *Computation* 2023, 11, 131. <https://doi.org/10.3390/computation11070131>.
- (7) H. K. Jalghaf, E. Kovács, and B. Bolló, “Simulation of transient heat transfer in multilayer walls with photovoltaic cell and air by using efficient numerical methods”, Elsevier, *Results Eng.* 2023, <https://doi.org/10.1016/j.rineng.2023.101715>.
- (8) H. K. Jalghaf, and E. Kovács, “Simulation of phase change materials in building walls using effective heat capacity model by recent numerical methods”, Elsevier, *Journal of Energy Storage*, <https://doi.org/10.1016/j.est.2024.110669>.